

Everllence



Marine engine programme

2025

Copyright 2026 © Everllence, filial af Everllence SE, Tyskland, registered with the Danish Business Authority under CVR No.: 31611792, (herein referred to as “Everllence”).

All data provided in this document is non-binding. This data serves informational purposes only and is especially not guaranteed in any way.

Depending on the subsequent specific individual projects, the relevant data may be subject to changes and will be assessed and determined individually for each project. This will depend on the particular characteristics of each individual project, especially specific site and operational conditions.

If this document is delivered in another language than English and doubts arise concerning the translation, the English text shall prevail.

Content

| | |
|---|------------|
| Everllence B&W two-stroke propulsion engines | 4 |
| Everllence B&W two-stroke propulsion systems | 90 |
| Everllence four-stroke propulsion engines | 98 |
| Everllence four-stroke marine mechanical pump drive | 140 |
| Everllence four-stroke marine GenSets | 150 |
| S.E.M.T. Pielstick four-stroke propulsion engines | 190 |
| Everllence four-stroke propulsion systems | 196 |
| Everllence turbochargers and exhaust gas systems | 212 |
| Everllence PrimeServ | 232 |
| Contacts | 248 |



Everllence B&W
two-stroke
propulsion
engines



Everllence B&W Tier II and Tier III engine programme

The two-stroke engines in this programme are either:

- Tier II engines complying with IMO Tier II
- Tier III engines complying with Tier II when operated in Tier II mode, and with Tier III when operated in Tier III mode


The latest updates on engine development and options are available at: www.everllence.com → marine → products → planning-tools-and-downloads → market-update-notes.

The latest updated engine programme is available at: www.everllence.com → marine → products → planning-tools-and-downloads → marine-engine-programme.

Engine type designation

To ensure that the engine designation describes the engine with regard to the fuel injection concept and the Tier III technology applied, the engine type designation also includes these concepts as described below (full designation, see page 20).

5G70ME-C10.7-GI-HPSCR

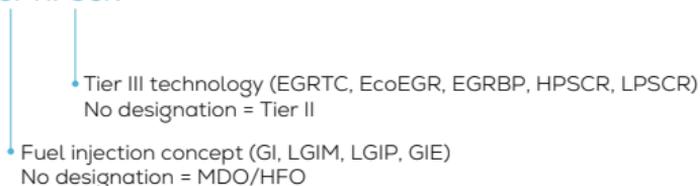

Fuel injection concepts are explained in detail on page 10 (ME-GI and ME-LGI dual fuel engines) and Tier III technologies on page 12.

ME-C engines

The electronic control of the ME-C engines includes flexible control of the cylinder processes, i.e. fuel injection timing and actuation of exhaust valves, starting valves, and cylinder lubrication.

CEAS, TCS and Engine selection guide

CEAS (computerized engine application system), TCS (turbocharger selection) and Engine selection guide applications cover all engine variants including available dual fuel and Tier III technology options. These applications provide essential data for the design and dimensioning of a ship's engine room (CEAS), applicable turbochargers (TCS) and Engine selection guide.

CEAS/TCS/Engine selection guide are available online at:
www.everllence.com → marine → products → planning-tools-and-downloads → ceas-engine-calculations/turbocharger-selection/engine-selection-guide

In CEAS and TCS, all engines in this programme can be selected from the category 'Catalogue: Official'.

Earlier versions of this engine programme mention additional engine types. Some of these are still available in CEAS and TCS under the category 'Catalogue: Replaced'. The remaining discontinued engines are no longer available for order, as they have not been updated to meet the upcoming requirements of the IMO regulations (MARPOL Annex VI and the NO_x Technical Code 2008).

The Engine selection guide is our recently launched web tool designed to offer an easy overview of our two-stroke Everllence B&W engine portfolio. With a few inputs, it provides a selection of relevant engines and variants and offers the option to sort the engine selection according to fuel consumption.

Engine power

The engine brake power is stated in kW. The power values stated in the tables are available up to tropical conditions at sea level, i.e.:

- turbocharger inlet air temperature 45°C
- turbocharger inlet air pressure 1,000 mbar
- cooling water (sea/fresh) temperature 32/36°C

Specific fuel oil consumption (SFOC)

The figures in the two-stroke chapter represent the values obtained when the engine and turbocharger are matched to the lowest possible SFOC values at the highest possible rating while fulfilling the IMO NO_x Tier II or Tier III emission limits.

The SFOC figures are given in g/kWh and are based on the use of a fuel oil with a lower calorific value (LCV) equal to 42,700 kJ/kg at ISO conditions:

- turbocharger inlet air temperature 25°C
- turbocharger inlet air pressure 1,000 mbar
- cooling water temperature 25°C

Tolerances

The energy efficiency design index (EEDI) has led to increased focus on low-load SFOC. Therefore, Everllence offers the option to select the SFOC guarantee at a load point in the range from 50% to 100%.

When choosing an SFOC guarantee at or below 100% engine load, the tolerances, adjustment, and calibration at 100% will affect an engine running at the lower SFOC guarantee load point. This also includes tolerances on measuring equipment, engine process control, and turbocharger performance.

SFOC tolerances which can be considered for contracts are as follows:

- 5% tolerance for 100-85% engine load
- 6% tolerance for <85-65% engine load
- 7% tolerance for <65-50% engine load

Below 50% engine load, SFOC cannot be guaranteed contractually.

Please note that SFOC guarantee in contracts can only be considered for one load point for Tier II engines. For Tier III engines see page 12.

Turbocharging system

Two-stroke engines can be delivered with Everllence, Accelleron, or MHI turbochargers as standard.

The SFOC figures given in the two-stroke chapter are based on turbocharging with the best possible turbocharging efficiency generally available, which means 67% at 100% engine load at SMCR for all engines.

There are exceptions to this rule, S40ME-C9.5 and S35ME-C9.7 are also available as conventional efficiency (64%) applications for both Tier II and Tier III options.

Only engine specifications for which an applicable high-efficiency turbocharger is available are subject to firm order.

Fuel consumption and economiser possibilities for Tier II engines

With the increased focus on SFOC in the low-load range, and to simplify options, we have decided to make one option available for all engines including dual-fuel engines.

Most engines require selection of an EGB (exhaust gas bypass) tuning. Exceptions are G95ME-C10.7/5 and G80ME-C10.7/5 engines.

SEQ (sequential tuning) is standard for G95ME-C10.7 and G80ME-C10.7 engines. This includes sequential turbocharging similar to the EGRTC Tier III technology.

EPT (engine process tuning) is available for G95ME-C10.5 and G80ME-C10.5 variants. EPT uses engine control process parameters to improve low-load SFOC.

The tuning methods mentioned are available for all SMCR points.

If a higher steam production is needed, the EEC (economiser energy control) solution offers additional automatic control of an EGB. Forcing an EGB open at loads where the EGB is normally closed results in a higher exhaust gas temperature, but with a negative impact on SFOC. However, the total fuel consumption (engine and oil-fired boiler) will be improved.

By adding an EGB, a higher steam production can also be obtained for EPT- and SEQ-tuned engines. The EGB must be closed above 75%

engine load, but can be opened below 75% to obtain higher exhaust temperatures, resulting in increased steam production. Calculations with EEC are made on request.

ME-GI and ME-LGI dual fuel engines

This engine programme includes various engines designed for gas fuel (ME-GI) and liquid gas fuel (ME-LGI engines) operation.

Fuel types

| Fuel | Fuel designation | LCV [kJ/kg] |
|----------------------|-------------------------|--------------------|
| Methane (LNG) | GI | 50,000 |
| Methanol | LGIM | 19,900 |
| LPG* | LGIP | 46,000 |
| Ethane (LEG) | GIE | 47,500 |

*LPG is a mixture of liquid propane and butane.

In this engine programme, engines available for the different fuel types are listed in separate sections: GI (page 35), LGIM (page 51), LGIP (page 61), and GIE (page 65).

Pilot oil energy fraction

In dual-fuel mode, the pilot oil energy fraction amounts to 1.5% or 5.0% for GI, depending on engine type, 5.0% for LGIM, LGIP and GIE. The listed pilot oil energy fractions refer to L1-rated engines operating at 100% load point in Tier II mode. Actual values vary depending on engine rating and load conditions. For actual pilot oil energy fractions, refer to individual engine pages and CEAS.

| Fuel designation | Available pilot oil fraction in % | Compatible pilot fuel oil types |
|-------------------------|--|--|
| GI | 1.5/5.0 | MDO & HFO (<0.50% S) |
| LGIM | 5.0 | MDO & HFO (<0.50% S) |
| LGIP | 5.0 | MDO & HFO (<0.50% S) |
| GIE | 5.0 | MDO & HFO (<0.50% S) |

All dual fuel engines include the same tuning as the Tier II diesel variant and are utilised in both the fuel oil and dual fuel mode.

The following fuel consumption figures are shown in the tables for dual fuel engines:

- dual fuel mode with distribution of specific gas consumption (SGC) and specific pilot oil consumption (SPOC)
- fuel oil mode

Guarantee figures for dual fuel engines are given for heat rate, which has the same tolerances as SFOC guarantees, see page 8.

Heat rate is defined as follows (example for methane as dual fuel):
Heat rate (kJ/kWh) = SGC (g/kWh) × 50 kJ/g + SPOC (g/kWh) × 42.7 kJ/g.

The CEAS report specifies the distribution between SGC and SPOC as well as the heat rate over the load range.

Figures on SPOC which can be considered for contractual agreements are as follows:

- 50% tolerance for <100-65% engine load
- 75% tolerance for <65-50% engine load

Below 50% engine load, SPOC cannot be guaranteed contractually.

Greenhouse gas emissions

In existing IMO regulations, the energy efficiency design index (EEDI) and other measures operate with CO₂ as the only contributor to greenhouse gas (GHG) emissions. However, IMO is considering to regulate other GHGs than CO₂ (methane and laughing gas). The expected timeframe for adoption of the IMO regulation on methane slip is 3-5 years. Further, EU regulations (FuelEU Maritime and EU Emission trading system (ETS)) now cover methane slip and laughing gas from 2025 and 2026, respectively.

In our effort to facilitate decarbonisation in the shipping industry, Everllence lists the industry-leading low and negligible methane slip levels for all ME-GI engines in every CEAS report.

Tier III technologies

To ensure compliance with IMO Tier III regulations, a Tier III NO_x reduction technology must be selected. The preferred technology depends on market demands, engine type, other requirements, and operational pattern.

The Emission Project Guide provides more detailed descriptions of these technologies at: www.everllence.com → marine → products → planning-tools-and-downloads → project-guides → two-stroke.

All Tier III engines have at least two operating modes:

- Tier III mode fulfilling the IMO Tier III regulations
- Tier II mode fulfilling the IMO Tier II regulations

Tier III technologies are designed for either low-sulphur fuels (<0.10%) or high-sulphur fuels (>0.50% and <3.50%) in Tier III operation. In Tier II operation, the engine is in all cases capable of operating on fuels with a high sulphur content. The fuel sulphur content must be selected when the engine is ordered, as it impacts the engine design.

Fuel consumption values can be used in contractual agreements for both Tier II and Tier III modes. For Tier III engines, SPOC values apply to Tier II mode. SFOC values apply to one load point per operating mode and the same load point for all operating modes.

EGR

Two EGR-matching concepts are available depending on engine bore:

- EGRTC: T/C cut-out matching for ME-C engines with bores ≥ 80 cm
- EGRBP: Bypass matching for some ME-C engines with bores ≤ 70 cm

EGR operation is also possible for GI and LGIM engines.

EcoEGR

EcoEGR is an SFOC-optimised version of the EGR system available on most ME-C engines. Compared to the standard EGR system, EcoEGR engines operate with 10–15% recirculation in Tier II mode and with slightly increased recirculation in Tier III mode. EcoEGR engines are available for compliant fuels (<0.50 %S) where considerable overall savings are obtained.

EcoEGR operation is also possible for GI and some LGIM engines.

SCR

Two SCR concepts are available:

- HPSCR: High-pressure SCR with a reactor installed upstream the turbocharger(s)
- LPSCR: Low-pressure SCR with a reactor installed downstream the turbocharger(s)

SCR operation applies to most ME-C engines, including some dual fuel engine types. The SCR system must be supplied by an approved supplier.

Application of high-sulphur fuels and SO_x scrubbers

All two-stroke engines in the Everllence marine engine programme are compatible with SO_x scrubbers, except for ME-GIE engines.

A SO_x scrubber installation will increase the backpressure, thereby affecting engine performance. Accordingly, it is required that a SO_x scrubber installation does not increase the backpressure by more than 30 mbar at SMCR.

Fuels

Since 1 January 2020, the global sulphur content for marine fuels must not exceed 0.50%. To ensure compliant operation, one of the following methods must be selected:

- Use a compliant fuel:
 - Global: max. 0.50% sulphur
 - ECA: max. 0.10% sulphur
- Use methane, ethane, methanol, or LPG together with a compliant pilot fuel.
- Use a high-sulphur fuel in combination with a SO_x scrubber to obtain an exhaust gas SO_x level equivalent to operation on a compliant fuel.

Some dual fuel engines are available on request with high-sulphur fuels in Tier II fuel oil mode with a scrubber installed.

The fuel specification must be selected at engine order as it impacts the engine design.

Fuels with a viscosity below 700 cSt at 50°C can be used.

Waste heat recovery systems

Waste heat recovery systems (WHRS) are available for certain engine configurations on request for both Tier II and Tier III engines with high-efficiency turbochargers. Contact Everllence for further information.

Power take off systems

Power take-off (PTO) systems are available on request for both Tier II and Tier III engines with high-efficiency turbochargers. PTO systems operate in the margin between the light propeller curve and the load limits of the engine. The magnitude of PTO power permitted is as such influenced by the propeller light running margin applied for the specific project. The specific load of the engine permitted for design, including power for propulsion and PTO power, as a function of speed, is governed by the PTO layout limit.

For further information on the PTO layout limit as well as the availability and integration of PTOs, please contact Everllence. Information about the different PTO solutions can be found in the paper "Shaft generators for low speed main engines" – available at: www.everllence.com → marine → products → planning-tools-and-downloads → technical-papers.

Lubricating oil consumption

The system oil consumption varies according to engine sizes and, operational and maintenance patterns.

Specific cylinder oil consumption

Alpha ACC (Adaptive Cylinder oil Control) is the lubricating mode for Everllence B&W two-stroke engines that involves lube oil dosing proportional to the engine load and to the sulphur content in the fuel being burned.

Dosage:

- 0-0.50% sulphur fuels including methane (LNG), methanol, LPG and ethane (LEG):
Minimum feed rate: 0.6 g/kWh
- >0.50% sulphur fuels (HSFO) (scrubber applications):
Feed rate (g/kWh) = ACC × S%,
 - where typically ACC = 0.3 g/(kWh × S%)

Recommended cylinder oils:

- Cat. II BN 40 cylinder oil is recommended for engines using low-sulphur fuels:
0-0.50% sulphur fuels including methane, methanol, LPG and ethane
- Cat. II BN 100-140+ cylinder oil is recommended for engines using high-sulphur fuels:
>0.50% sulphur fuels

In the past, cylinder lubricating oils have been mixed to optimise the cleaning performance of an oil to the level required by a specific engine, or specific operating conditions. For example, by mixing a Cat. II BN 100 oil with a less efficient BN 40-70 oil. With the introduction of Cat. II BN 40 oils, alternating between high- and low-BN cylinder oils is no longer necessary.

For specific lubrication guidelines, reference is made to the latest lubrication guidelines available for your specific engine type, for example Service Letters. Service Letters are available at: www.everllence.com → marine → planning-tools-and-downloads → Service Letters.

Extent of delivery

In principle, any binding extent of delivery of Everllence B&W two-stroke engines is to be supplied by our licensee, the engine maker, who should be contacted to determine the execution for the actual project.

Special certification processes will need to be specified before an order is placed as they require a different scope of delivery, for example: engines certified for US EPA, engines with SCR certified by Scheme B, etc.

Everllence Asset+

Everllence Asset+ engine functionality options enable installation and management of optional updates and features for Everllence B&W engines. It is a range of flexible solutions that can match the individual needs of the end users. The first Everllence Asset+ options available are described in the following. Their application depends on the engine and ship type, and they can be ordered directly from our licensees.

PMI ACCo

Adaptive Cylinder Control (ACCo) is a fully automatic system that ensures constant optimal engine tuning regardless of engine load, load changes, and varying fuel calorific values. Using performance values from the engine's official shop test as reference, the algorithm adjusts the fuel index and exhaust valve operation of each cylinder. PMI ACCo aims for the lowest possible fuel consumption.

ACCo is available on request for ME-C engines and is delivered as the standard configuration for ME-C10.7 and dual fuel engines.

Synchrophasing

Synchrophasing is an effective, maintenance-free tool introduced for ship types with twin propulsion to reduce vibrations on both vessel and engine structures. Vibrations are reduced by synchronising the port and starboard shaft speeds, thereby out-balancing forces/moments from the starboard engine/propeller with the same forces/moments from the portside engine/ propeller.

Vibrations can be reduced by up to 50-70% depending on sea wave state and vessel roll/pitch. Synchrophasing is available on request for all ME-C engines.

PTO interface option C

PTO interface option C is an enhanced interface between the engine control system (ECS) and the vessel's power management system (PMS) for plants with a large power take-off (PTO) or shaft generator capacity relative to the SMCR-power.

The enhanced interface improves governor stability and performance, and increases PTO power availability in the design. In addition, PTO

interface option C provides signals to the PMS that enable automatic load sharing between the main engine, the PTO, and the gensets. This ensures a higher utilisation rate of the PTO, thus reducing the genset's running hours. If power is supplied solely by the PTO, it will also reduce the risk of blackout without overloading of the engine.

PTO interface option C is available on request for all ME-C engines equipped with a large PTO.

PTO option 2 for EEDI

PTO option 2 for EEDI adds additional benefits for engines using PTO interface option C. By applying the EEDI guideline's option 2 for accounting for the PTO, the EEDI can be improved, especially, but not exclusively, for vessels with a large onboard electric power consumption. At the same time, it ensures installation of a main engine with sufficient power and, hereby, torque capacity for driving the PTO in conditions less ideal than at sea trial.

Adaptive Cooling

Adaptive Cooling is an improved design of the piping and valve arrangement for automatic control of the cooling water flow to the scavenge air cooler and the exhaust gas recirculation cooler for EGR engines, depending on the engine operating mode.

It reduces the power consumption for cooling water circulation significantly when running in Tier II mode (EGRBP engines) or TC cut-out mode (EGRTC engines), see page 12, and, as a result, reduces fuel consumption and improves the carbon intensity indicator (CII) rating.

Adaptive Cooling is available on request for all EGRBP and EGRTC engines.

Two-stage Cooler

The Two-stage Cooler is a new scavenge air cooler design that uniquely enables utilisation of the energy from the scavenge air cooling process for other energy-consuming processes on board, such as increasing the boiler feedwater temperature, gas vaporisation, freshwater production, air condition heating, organic Rankine cycle system, or the ballast water treatment system. This leads to lower fuel consumption and improved CII rating.

The Two-stage Cooler is available on request for all Everllence B&W two-stroke engines, based on a case-specific pre-study conducted by Everllence.

Gas Return System


The gas return system is an innovative solution that captures gas emitted during blowdown events when the main engine gas operation is stopped. This prevents unnecessary emissions and repurposes the gas for onboard energy consumption.

The system enhances energy efficiency, reduces methane emissions and fuel consumption, and improves CII rating. It is particularly beneficial for vessels operating within or in and out of the EU when the novel FuelEU regulation is implemented.

It is available for all newbuild Everllence B&W dual-fuel ME-GI engines.

Engine dimensions

The minimum length L_{min} is stated from the aft end of the crankshaft to the fore end of the engine.

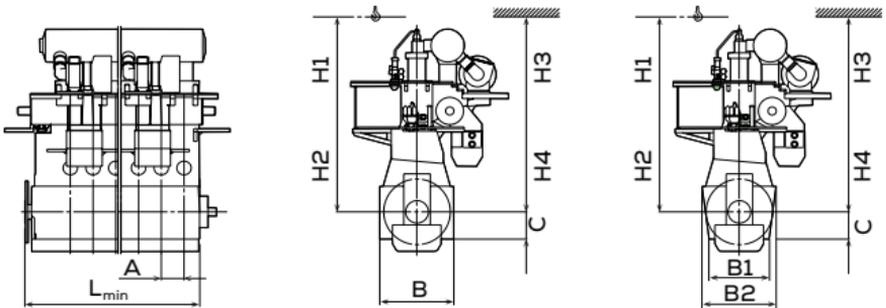

L_{min} Minimum length of engine

A Cylinder distance

B Bedplate width

B1 Bedplate width at foot flange

B2 Bedplate width at top flange

C Crankshaft to underside of foot flange

H1 Normal height lifting procedure

H2 Reduced height lifting procedure

H3 Reduced height lifting procedure with Everllence B&W double-jib crane

H4 Normal height lifting procedure with Everllence B&W double-jib crane

Dry masses


Dry masses are stated in metric tonnes for engines with Everllence turbocharger(s) and a standard turning wheel. Figures will vary depending on the design and options chosen, for example, moment compensators, turning wheel, etc.

Dry masses for Tier III engines cover components directly integrated on the engine.

Indicated values are for guidance only and are not binding.

Engine type designation

5G70ME-C10.7-GI-HPSCR

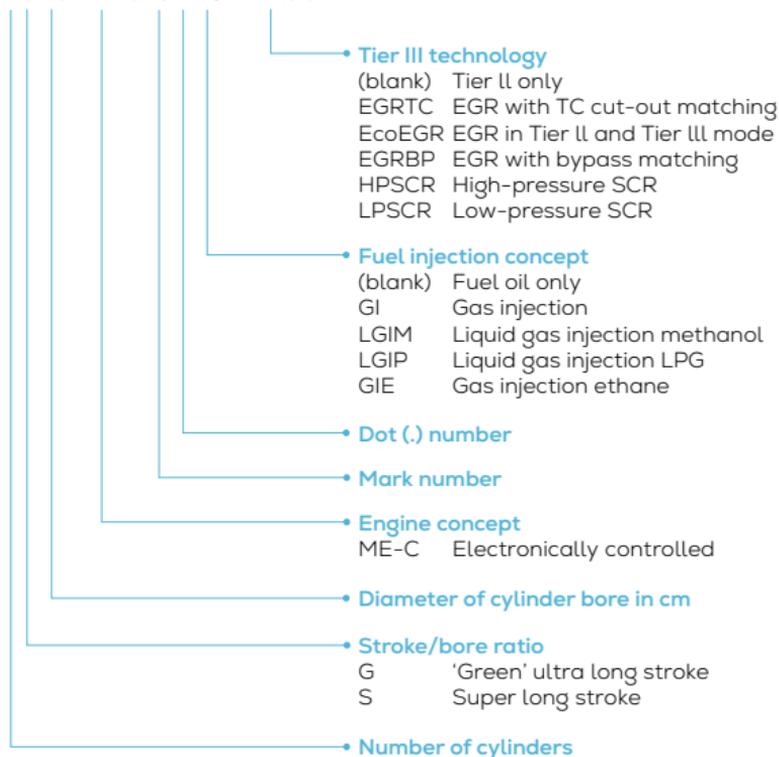

Engine fuel variants

| Engine type | Fuel oil | GI | LGIM | LGIP | GIE |
|--------------|----------|----|------|------|-----|
| G95ME-C10.7 | • | • | • | | |
| G95ME-C10.5 | | • | | | |
| G80ME-C10.7 | • | • | • | | |
| G80ME-C10.5 | | • | | | |
| G70ME-C10.7 | • | • | • | | |
| G70ME-C10.58 | • | • | | | |
| G70ME-C10.5 | | • | | | |
| G60ME-C10.5 | • | • | • | • | |
| G60ME-C9.5 | | | | | • |
| S60ME-C10.7 | • | • | • | | |
| S60ME-C10.5 | | • | | | |
| G50ME-C10.7 | • | • | • | | |
| G50ME-C9.6 | | | | • | |
| G50ME-C9.5 | | | | | • |
| S50ME-C10.7 | • | • | • | | |
| S50ME-C9.7 | | • | | | |
| G45ME-C9.7 | • | | • | | |
| G45ME-C9.5 | | • | | | |
| S40ME-C9.5 | • | | | | |
| S35ME-C9.7 | • | • | | | |

Tier III technology variants


| Engine type | EGRTC | EGRBP | EcoEGR | HPSCR | LPSCR |
|--------------|-------|-------|--------|-------|-------|
| G95ME-C10.7 | • | | • | | • |
| G95ME-C10.5 | • | | • | | • |
| G80ME-C10.7 | • | | • | • | • |
| G80ME-C10.5 | • | | • | • | • |
| G70ME-C10.7 | | • | • | • | |
| G70ME-C10.58 | | • | • | • | |
| G70ME-C10.5 | | • | • | • | |
| G60ME-C10.5 | | | • | • | |
| G60ME-C9.5 | | | | • | |
| S60ME-C10.7 | | • | • | • | |
| S60ME-C10.5 | | • | • | • | |
| G50ME-C10.7 | | • | • | • | |
| G50ME-C9.6 | | | | • | |
| G50ME-C9.5 | | | | • | |
| S50ME-C10.7 | | | • | • | |
| S50ME-C9.7 | | • | | • | |
| G45ME-C9.7 | | • | • | • | |
| G45ME-C9.5 | | • | | • | |
| S40ME-C9.5 | | | • | • | |
| S35ME-C9.7 | | | • | • | • |

Fuel oil

| Fuel variants | Page |
|---|-------------|
| Fuel oil | 23 |
| Methane/LNG (GI) | 35 |
| Methanol (LGIM) | 51 |
| LPG (LGIP) | 61 |
| Ethane/LEG (GIE) | 65 |
| Specifications (dimensions and dry masses) | 69 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 6 | 41,220 |
| 7 | 48,090 |
| 8 | 54,960 |
| 9 | 61,830 |
| 10 | 68,700 |
| 11 | 75,570 |
| 12 | 82,440 |

Stroke: 3,460 mm/L₁ MEP: 21.0 bar

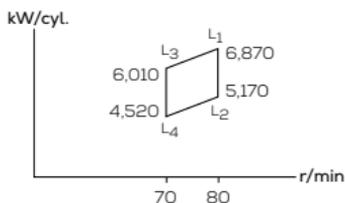

Everlence B&W G95ME-C10.7

L₁ SFOC [g/kWh]

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load SEQ | 153.0 | 157.0 | 163.5 |

Everlence B&W G95ME-C10.7-EGRTC

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 153.0 | 157.0 | 163.5 |
| Tier III mode | 159.0 | 161.0 | 167.5 |

Everlence B&W G95ME-C10.7-EcoEGR

L₁ SFOC [g/kWh]


| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 154.0 | 154.0 | 161.5 |
| Tier III mode | 159.0 | 160.5 | 166.0 |

Everlence B&W G95ME-C10.7-LPSCR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 153.0 | 157.0 | 163.5 |
| Tier III mode | 160.0 | 160.0 | 165.5 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 6 | 28,260 |
| 7 | 32,970 |
| 8 | 37,680 |
| 9* | 42,390 |

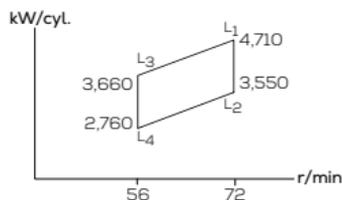Stroke: 3,720 mm/L₁ MEP: 21.0 bar

Everllence B&W G80ME-C10.7

L₁ SFOC [g/kWh]

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load SEQ | 154.0 | 158.0 | 164.5 |

Everllence B&W G80ME-C10.7-EGRTC

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 154.0 | 158.0 | 164.5 |
| Tier III mode | 160.0 | 162.0 | 168.5 |

Everllence B&W G80ME-C10.7-EcoEGR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 155.0 | 155.0 | 162.5 |
| Tier III mode | 160.0 | 161.5 | 167.0 |

Everllence B&W G80ME-C10.7-HPSCR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 154.0 | 158.0 | 164.5 |
| Tier III mode | 157.0 | 158.5 | 165.0 |

Everllence B&W G80ME-C10.7-LPSCR


L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 154.0 | 158.0 | 164.5 |
| Tier III mode | 161.0 | 161.0 | 166.5 |

* Available on request for HPSCR

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 18,850 |
| 6 | 22,620 |

Stroke: 3,256 mm/L₁ MEP: 21.0 bar

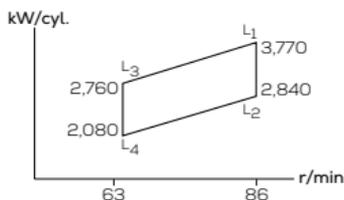

Everlence B&W G70ME-C10.7

L₁ SFOC [g/kWh]

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load EGB | 158.0 | 159.0 | 165.5 |

Everlence B&W G70ME-C10.7-EGRBP

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 161.0 | 162.5 | 170.0 |
| Tier III mode | 162.0 | 162.5 | 168.0 |

Everlence B&W G70ME-C10.7-EcoEGR

L₁ SFOC [g/kWh]


| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 157.0 | 155.0 | 162.5 |
| Tier III mode | 162.0 | 162.5 | 168.0 |

Everlence B&W G70ME-C10.7-HPSCR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 158.0 | 159.0 | 165.5 |
| Tier III mode | 159.0 | 159.5 | 166.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 15,850 |
| 6 | 19,020 |

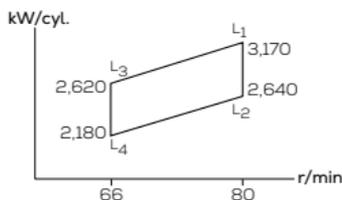Stroke: 3,256 mm/L₁ MEP: 19.0 bar**Everllence B&W G70ME-C10.58****L₁ SFOC [g/kWh]**

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load EGB | 158.0 | 158.0 | 164.5 |

Everllence B&W G70ME-C10.58-EGRBP**L₁ SFOC [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 160.0 | 160.5 | 168.0 |
| Tier III mode | 164.5 | 164.0 | 170.5 |

Everllence B&W G70ME-C10.58-EcoEGR**L₁ SFOC [g/kWh]**


| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 156.5 | 155.0 | 162.5 |
| Tier III mode | 161.5 | 161.5 | 167.0 |

Everllence B&W G70ME-C10.58-HPSCR**L₁ SFOC [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 157.5 | 158.0 | 164.5 |
| Tier III mode | 158.5 | 158.5 | 165.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 14,200 |
| 6 | 17,040 |
| 7 | 19,880 |
| 8 | 22,720 |

Stroke: 2,790 mm/L₁ MEP: 21.0 bar

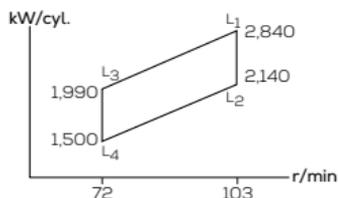

Everlence B&W G60ME-C10.5

L₁ SFOC [g/kWh]

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load EGB | 159.0 | 160.0 | 166.5 |

Everlence B&W G60ME-C10.5-EcoEGR

L₁ SFOC [g/kWh]


| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 158.0 | 157.0 | 164.5 |
| Tier III mode | 163.0 | 163.5 | 169.0 |

Everlence B&W G60ME-C10.5-HPSCR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 159.0 | 160.0 | 166.5 |
| Tier III mode | 160.0 | 160.5 | 167.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 12,450 |
| 6 | 14,940 |
| 7 | 17,430 |
| 8 | 19,920 |

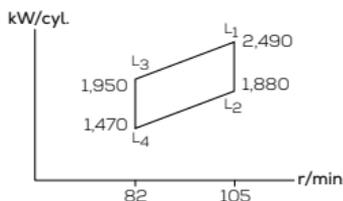Stroke: 2,400 mm/L₁ MEP: 21.0 bar**Everllence B&W S60ME-C10.7****L₁ SFOC [g/kWh]**

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load EGB | 159.0 | 160.0 | 166.5 |

Everllence B&W S60ME-C10.7-EGRBP**L₁ SFOC [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 162.0 | 163.5 | 171.0 |
| Tier III mode | 163.0 | 163.5 | 169.0 |

Everllence B&W S60ME-C10.7-EcoEGR**L₁ SFOC [g/kWh]**


| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 158.0 | 156.0 | 163.5 |
| Tier III mode | 163.0 | 163.5 | 169.0 |

Everllence B&W S60ME-C10.7-HPSCR**L₁ SFOC [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 159.0 | 160.0 | 166.5 |
| Tier III mode | 160.0 | 160.5 | 167.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 8,600 |
| 6 | 10,320 |
| 7 | 12,040 |
| 8 | 13,760 |

Stroke: 2,500 mm/L₁ MEP: 21.0 bar

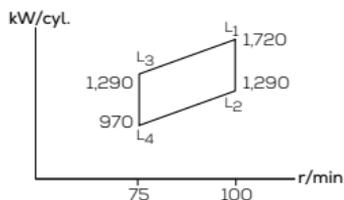

Everllence B&W G50ME-C10.7

L₁ SFOC [g/kWh]

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load EGB | 160.0 | 160.0 | 166.5 |

Everllence B&W G50ME-C10.7-EGRBP

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 163.0 | 163.5 | 171.0 |
| Tier III mode | 164.0 | 163.5 | 169.0 |

Everllence B&W G50ME-C10.7-EcoEGR

L₁ SFOC [g/kWh]


| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 159.0 | 156.0 | 163.5 |
| Tier III mode | 164.0 | 163.5 | 169.0 |

Everllence B&W G50ME-C10.7-HPSCR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 160.0 | 160.0 | 166.5 |
| Tier III mode | 161.0 | 160.5 | 167.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 9,500 |
| 6 | 11,400 |
| 7 | 13,300 |
| 8 | 15,200 |
| 9 | 17,100 |

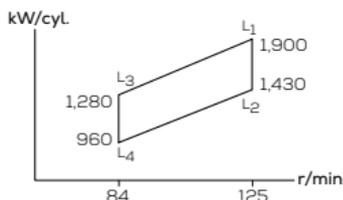Stroke: 2,214 mm/L₁ MEP: 21.0 bar**Everllence B&W S50ME-C10.7****L₁ SFOC [g/kWh]**

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load EGB | 161.0 | 161.0 | 167.5 |

Everllence B&W S50ME-C10.7-EcoEGR**L₁ SFOC [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 160.0 | 157.0 | 164.5 |
| Tier III mode | 165.0 | 164.5 | 170.0 |


Everllence B&W S50ME-C10.7-HPSCR**L₁ SFOC [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 161.0 | 161.0 | 167.5 |
| Tier III mode | 162.0 | 161.5 | 168.0 |

Note: S50ME-C10.7-EGRBP available on request

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 6,950 |
| 6 | 8,340 |
| 7 | 9,730 |
| 8 | 11,120 |

Stroke: 2,250 mm/L₁ MEP: 21.0 bar

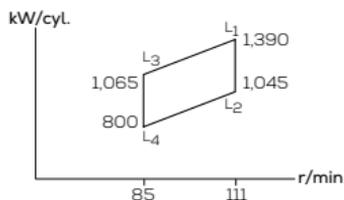

Everllence B&W G45ME-C9.7

L₁ SFOC [g/kWh]

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load EGB | 163.0 | 163.0 | 169.5 |

Everllence B&W G45ME-C9.7-EGRBP

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 163.0 | 163.5 | 171.0 |
| Tier III mode | 168.0 | 167.0 | 173.5 |

Everllence B&W G45ME-C9.7-EcoEGR

L₁ SFOC [g/kWh]


| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 162.0 | 160.0 | 167.5 |
| Tier III mode | 167.0 | 166.5 | 172.0 |

Everllence B&W G45ME-C9.7-HPSCR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 163.0 | 163.0 | 169.5 |
| Tier III mode | 164.0 | 163.5 | 170.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 5,675 |
| 6 | 6,810 |
| 7 | 7,945 |
| 8 | 9,080 |
| 9* | 10,215 |

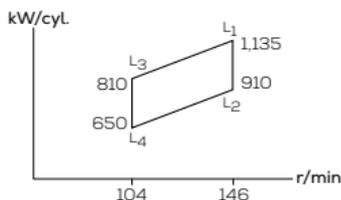Stroke: 1,770 mm/L₁ MEP: 21.0 bar

Everllence B&W S40ME-C9.5

L₁ SFOC [g/kWh]

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load EGB | 171.0 | 170.0 | 176.5 |

Everllence B&W S40ME-C9.5-EcoEGR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 170.0 | 167.0 | 174.5 |
| Tier III mode | 175.0 | 173.5 | 179.0 |

Everllence B&W S40ME-C9.5-HPSCR

L₁ SFOC [g/kWh]


| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 171.0 | 170.0 | 176.5 |
| Tier III mode | 172.0 | 170.5 | 177.0 |

Note: All fuel consumption figures are based on engine driven HPS

* Not available with HPSCR

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 4,350 |
| 6 | 5,220 |
| 7 | 6,090 |
| 8 | 6,960 |

Stroke: 1,550 mm/L₁ MEP: 21.0 bar

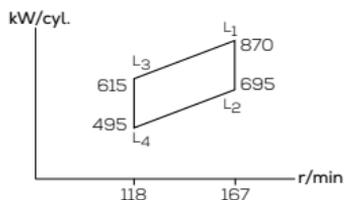

Everlence B&W S35ME-C9.7

L₁ SFOC [g/kWh]

| Opt. load range | 50% | 75% | 100% |
|-----------------|-------|-------|-------|
| Low-load EGB | 168.0 | 167.0 | 173.5 |

Everlence B&W S35ME-C9.5-EcoEGR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 167.0 | 164.0 | 171.5 |
| Tier III mode | 172.0 | 170.5 | 176.0 |

Everlence B&W S35ME-C9.7-HPSCR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 168.0 | 167.0 | 173.5 |
| Tier III mode | 169.0 | 167.5 | 174.0 |

Everlence B&W S35ME-C9.7-LPSCR

L₁ SFOC [g/kWh]

| | 50% | 75% | 100% |
|---------------|-------|-------|-------|
| Tier II mode | 168.0 | 167.0 | 173.5 |
| Tier III mode | 171.0 | 169.0 | 174.0 |


Note: All fuel consumption figures are based on engine driven HPS

Methane/LNG (GI)

| Fuel variants | Page |
|---|-------------|
| Fuel oil | 23 |
| Methane/LNG (GI) | 35 |
| Methanol (LGIM) | 51 |
| LPG (LGIP) | 61 |
| Ethane/LEG (GIE) | 65 |
| Specifications (dimensions and dry masses) | 69 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 6 | 41,220 |
| 7 | 48,090 |
| 8 | 54,960 |
| 9 | 61,830 |
| 10 | 68,700 |
| 11 | 75,570 |
| 12 | 82,440 |

Stroke: 3,460 mm/L₁ MEP: 21.0 bar

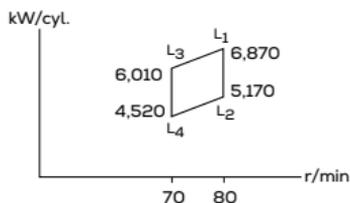

Everllence B&W G95ME-C10.7-GI

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load SEQ | 127.3+3.8/154.0 | 128.9+2.9/158.0 | 135.9+2.4/164.5 |

Everllence B&W G95ME-C10.7-GI-EGRTC

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 127.3+3.8/154.0 | 128.9+2.9/158.0 | 135.9+2.4/164.5 |
| Tier III mode | 132.4+3.8/160.0 | 134.0+2.9/162.0 | 139.3+2.4/168.5 |

Everllence B&W G95ME-C10.7-GI-EcoEGR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]


| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 128.2+3.8/155.0 | 128.1+2.9/155.0 | 134.2+2.4/162.5 |
| Tier III mode | 132.4+3.8/160.0 | 133.6+2.9/161.5 | 138.0+2.4/167.0 |

Everllence B&W G95ME-C10.7-GI-LPSCR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 127.3+3.8/154.0 | 128.9+2.9/158.0 | 135.9+2.4/164.5 |
| Tier III mode | 133.3+3.8/161.0 | 133.2+2.9/161.0 | 137.6+2.4/166.5 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 6 | 41,220 |
| 7 | 48,090 |
| 8 | 54,960 |
| 9 | 61,830 |
| 10 | 68,700 |
| 11 | 75,570 |
| 12 | 82,440 |

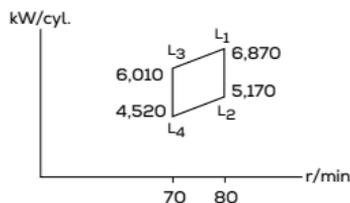Stroke: 3,460 mm/L₁ MEP: 21.0 bar**Everllence B&W G95ME-C10.5-GI****L1 dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load EPT | 129.9+3.8/156.0 | 132.8+2.9/158.0 | 141.0+2.4/164.5 |

Everllence B&W G95ME-C10.5-GI-EGRTC**L1 dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 127.3+3.8/154.0 | 132.8+2.9/158.0 | 141.0+2.4/164.5 |
| Tier III mode | 133.3+3.8/160.0 | 137.9+2.9/162.0 | 144.4+2.4/168.5 |

Everllence B&W G95ME-C10.5-GI-EcoEGR**L1 dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**


| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 129.0+3.8/155.0 | 131.9+2.9/155.0 | 139.3+2.4/162.5 |
| Tier III mode | 133.3+3.8/160.0 | 137.5+2.9/161.5 | 143.1+2.4/167.0 |

Everllence B&W G95ME-C10.5-GI-LPSCR**L1 dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 129.9+3.8/156.0 | 132.8+2.9/158.0 | 141.0+2.4/164.5 |
| Tier III mode | 134.1+3.8/161.0 | 137.0+2.9/161.0 | 142.7+2.4/166.5 |

Note: G95ME-C10.5/-LGIM variants available as replaced engines

| Cyl. | L ₁ kW |
|------|-------------------|
| 6 | 28,260 |
| 7 | 32,970 |
| 8 | 37,680 |
| 9* | 42,390 |

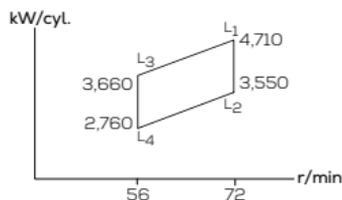Stroke: 3,720 mm/L₁ MEP: 21.0 bar

Everlence B&W G80ME-C10.7-GI

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load SEQ | 128.1+3.9/155.0 | 129.8+2.9/159.0 | 136.7+2.4/165.5 |

Everlence B&W G80ME-C10.7-GI-EGRTC

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 128.1+3.9/155.0 | 129.8+2.9/159.0 | 136.7+2.4/165.5 |
| Tier III mode | 133.3+3.9/161.0 | 134.9+2.9/163.0 | 140.1+2.4/169.5 |

Everlence B&W G80ME-C10.7-GI-EcoEGR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 129.0+3.9/156.0 | 128.9+2.9/156.0 | 135.0+2.4/163.5 |
| Tier III mode | 133.3+3.9/161.0 | 134.5+2.9/162.5 | 138.8+2.4/168.0 |

Everlence B&W G80ME-C10.7-GI-HPSCR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 128.1+3.9/155.0 | 129.8+2.9/159.0 | 136.7+2.4/165.5 |
| Tier III mode | 130.7+3.9/158.0 | 131.9+2.9/159.5 | 137.1+2.4/166.0 |


Everlence B&W G80ME-C10.7-GI-LPSCR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 128.1+3.9/155.0 | 129.8+2.9/159.0 | 136.7+2.4/165.5 |
| Tier III mode | 134.1+3.9/162.0 | 134.0+2.9/162.0 | 138.4+2.4/167.5 |

* Available on request for HPSCR

| Cyl. | L ₁ kW |
|------|-------------------|
| 6 | 28,260 |
| 7 | 32,970 |
| 8 | 37,680 |
| 9* | 42,390 |

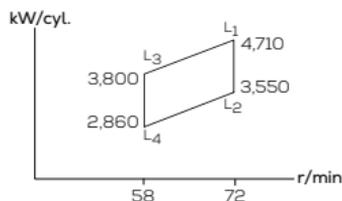Stroke: 3,720 mm/L₁ MEP: 21.0 bar**Everllence B&W G80ME-C10.5-GI**

| | L ₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh] | | |
|--------------|--|-----------------|-----------------|
| | 50% | 75% | 100% |
| Low-load EPT | 129.8+3.9/157.0 | 132.8+2.9/159.0 | 141.0+2.4/165.5 |

Everllence B&W G80ME-C10.5-GI-EGRTC

| | L ₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh] | | |
|---------------|--|-----------------|-----------------|
| | 50% | 75% | 100% |
| Tier II mode | 128.1+3.9/155.0 | 132.8+2.9/159.0 | 141.0+2.4/165.5 |
| Tier III mode | 133.3+3.9/161.0 | 137.9+2.9/163.0 | 144.4+2.4/169.5 |

Everllence B&W G80ME-C10.5-GI-EcoEGR

| | L ₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh] | | |
|---------------|--|-----------------|-----------------|
| | 50% | 75% | 100% |
| Tier II mode | 129.0+3.9/156.0 | 131.9+2.9/156.0 | 139.3+2.4/163.5 |
| Tier III mode | 133.3+3.9/161.0 | 137.5+2.9/162.5 | 143.1+2.4/168.0 |

Everllence B&W G80ME-C10.5-GI-HPSCR

| | L ₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh] | | |
|---------------|--|-----------------|-----------------|
| | 50% | 75% | 100% |
| Tier II mode | 129.8+3.9/157.0 | 132.8+2.9/159.0 | 141.0+2.4/165.5 |
| Tier III mode | 130.7+3.9/158.0 | 134.9+2.9/159.5 | 141.4+2.4/166.0 |

Everllence B&W G80ME-C10.5-GI-LPSCR


| | L ₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh] | | |
|---------------|--|-----------------|-----------------|
| | 50% | 75% | 100% |
| Tier II mode | 129.8+3.9/157.0 | 132.8+2.9/159.0 | 141.0+2.4/165.5 |
| Tier III mode | 134.1+3.9/162.0 | 137.0+2.9/162.0 | 142.7+2.4/167.5 |

* Available on request for HPSCR

Note: G80ME-C10.5/-LGIM variants available as replaced engines

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 18,850 |
| 6 | 22,620 |

Stroke: 3,256 mm/L₁ MEP: 21.0 bar

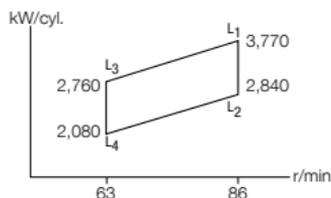

Everllence B&W G70ME-C10.7-GI

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load EGB | 131.5+3.9/159.0 | 130.6+3.0/160.0 | 137.5+2.5/166.5 |

Everllence B&W G70ME-C10.7-GI-EGRBP

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 134.1+3.9/162.0 | 135.3+3.0/163.5 | 141.4+2.5/171.0 |
| Tier III mode | 134.9+3.9/163.0 | 135.3+3.0/163.5 | 139.7+2.5/169.0 |

Everllence B&W G70ME-C10.7-GI-EcoEGR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]


| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 130.7+3.9/158.0 | 128.9+3.0/156.0 | 135.0+2.5/163.5 |
| Tier III mode | 134.9+3.9/163.0 | 135.3+3.0/163.5 | 139.7+2.5/169.0 |

Everllence B&W G70ME-C10.7-GI-HPSCR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 131.5+3.9/159.0 | 130.6+3.0/160.0 | 137.5+2.5/166.5 |
| Tier III mode | 132.4+3.9/160.0 | 132.7+3.0/160.5 | 138.0+2.5/167.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 15,850 |
| 6 | 19,020 |

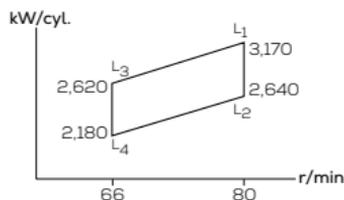Stroke: 3,256 mm/L₁ MEP: 19.0 bar**Everllence B&W G70ME-C10.58-GI****L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load EGB | 130.5+3.9/160.5 | 130.8+2.9/162.0 | 137.9+2.4/168.5 |

Everllence B&W G70ME-C10.58-GI-EGRBP**L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 130.5+3.9/160.5 | 131.2+2.9/162.5 | 139.2+2.4/170.0 |
| Tier III mode | 134.8+3.9/163.5 | 135.9+2.9/162.0 | 141.3+2.4/167.5 |

Everllence B&W G70ME-C10.58-GI-EcoEGR**L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**


| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 129.7+3.9/157.5 | 130.8+2.9/156.0 | 137.9+2.4/163.5 |
| Tier III mode | 133.9+3.9/162.5 | 136.3+2.9/162.5 | 141.7+2.4/168.0 |

Everllence B&W G70ME-C10.58-GI-HPSCR**L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 130.5+3.9/160.5 | 130.8+2.9/162.0 | 137.9+2.4/168.5 |
| Tier III mode | 131.4+3.9/159.5 | 132.9+2.9/158.5 | 138.3+2.4/164.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 15,850 |
| 6 | 19,020 |

Stroke: 3,256 mm/L₁ MEP: 19.0 bar

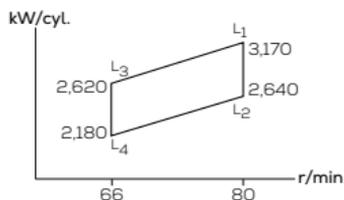

Everllence B&W G70ME-C10.5-GI

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load EGB | 133.0+3.9/160.5 | 134.1+3.0/161.0 | 142.1+2.5/167.5 |

Everllence B&W G70ME-C10.5-GI-EGRBP

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 133.0+3.9/160.5 | 134.6+3.0/161.5 | 143.4+2.5/169.0 |
| Tier III mode | 137.3+3.9/165.5 | 139.3+3.0/165.0 | 145.5+2.5/171.5 |

Everllence B&W G70ME-C10.5-GI-EcoEGR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]


| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 132.2+3.9/159.5 | 133.3+3.0/158.0 | 140.4+2.5/165.5 |
| Tier III mode | 136.5+3.9/164.5 | 138.8+3.0/164.5 | 144.3+2.5/170.0 |

Everllence B&W G70ME-C10.5-GI-HPSCR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 133.0+3.9/160.5 | 134.1+3.0/161.0 | 142.1+2.5/167.5 |
| Tier III mode | 133.9+3.9/161.5 | 136.3+3.0/161.5 | 142.6+2.5/168.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 14,200 |
| 6 | 17,040 |
| 7 | 19,880 |
| 8 | 22,720 |

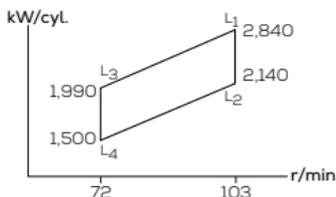Stroke: 2,790 mm/L₁ MEP: 21.0 bar**Everllence B&W G60ME-C10.5-GI****L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load EGB | 132.4+3.9/160.0 | 134.4+3.0/161.0 | 142.7+2.5/167.5 |

Everllence B&W G60ME-C10.5-GI-EcoEGR**L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**


| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 131.5+3.9/159.0 | 133.6+3.0/158.0 | 140.9+2.5/165.5 |
| Tier III mode | 135.8+3.9/164.0 | 139.1+3.0/164.5 | 144.8+2.5/170.0 |

Everllence B&W G60ME-C10.5-GI-HPSCR**L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 132.4+3.9/160.0 | 134.4+3.0/161.0 | 142.7+2.5/167.5 |
| Tier III mode | 133.2+3.9/161.0 | 136.6+3.0/161.5 | 143.1+2.5/168.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 12,450 |
| 6 | 14,940 |
| 7 | 17,430 |
| 8 | 19,920 |

Stroke: 2,400 mm/L₁ MEP: 21.0 bar

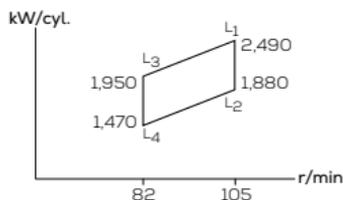

Everlence B&W S60ME-C10.7-GI

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load EGB | 132.4+3.9/160.0 | 131.4+3.0/161.0 | 138.4+2.5/167.5 |

Everlence B&W S60ME-C10.7-GI-EGRBP

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 134.9+3.9/163.0 | 136.1+3.0/164.5 | 142.2+2.5/172.0 |
| Tier III mode | 135.8+3.9/164.0 | 136.1+3.0/164.5 | 140.5+2.5/170.0 |

Everlence B&W S60ME-C10.7-GI-EcoEGR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]


| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 131.5+3.9/159.0 | 129.7+3.0/157.0 | 135.8+2.5/164.5 |
| Tier III mode | 135.8+3.9/164.0 | 136.1+3.0/164.5 | 140.5+2.5/170.0 |

Everlence B&W S60ME-C10.7-GI-HPSCR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 132.4+3.9/160.0 | 131.4+3.0/161.0 | 138.4+2.5/167.5 |
| Tier III mode | 133.2+3.9/161.0 | 133.6+3.0/161.5 | 138.8+2.5/168.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 12,450 |
| 6 | 14,940 |
| 7 | 17,430 |
| 8 | 19,920 |

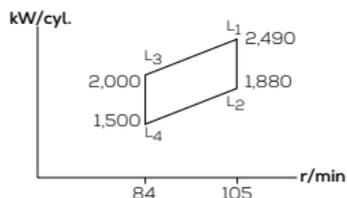Stroke: 2,400 mm/L₁ MEP: 21.0 bar**Everllence B&W S60ME-C10.5-GI****L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load EGB | 134.9+4.0/163.0 | 136.9+3.0/164.0 | 145.2+2.5/170.5 |

Everllence B&W S60ME-C10.5-GI-EGRBP**L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 134.9+4.0/163.0 | 137.4+3.0/164.5 | 146.5+2.5/172.0 |
| Tier III mode | 139.1+4.0/168.0 | 142.1+3.0/168.0 | 148.6+2.5/174.5 |

Everllence B&W S60ME-C10.5-GI-EcoEGR**L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**


| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 134.0+4.0/162.0 | 136.1+3.0/161.0 | 143.5+2.5/168.5 |
| Tier III mode | 138.3+4.0/167.0 | 141.6+3.0/167.5 | 147.3+2.5/173.0 |

Everllence B&W S60ME-C10.5-GI-HPSCR**L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 134.9+4.0/163.0 | 136.9+3.0/164.0 | 145.2+2.5/170.5 |
| Tier III mode | 135.7+4.0/164.0 | 139.1+3.0/164.5 | 145.6+2.5/171.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 8,600 |
| 6 | 10,320 |
| 7 | 12,040 |
| 8 | 13,760 |

Stroke: 2,500 mm/L₁ MEP: 21.0 bar

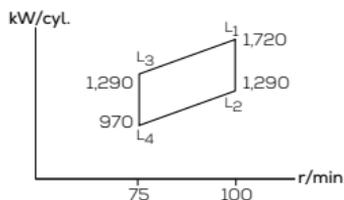

Everllence B&W G50ME-C10.7-GI

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load EGB | 133.2+3.9/161.0 | 131.4+3.0/161.0 | 138.4+2.5/167.5 |

Everllence B&W G50ME-C10.7-GI-EGRBP

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 135.8+3.9/164.0 | 136.1+3.0/164.5 | 142.2+2.5/172.0 |
| Tier III mode | 136.6+3.9/165.0 | 136.1+3.0/164.5 | 140.5+2.5/170.0 |

Everllence B&W G50ME-C10.7-GI-EcoEGR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]


| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 132.4+3.9/160.0 | 129.7+3.0/157.0 | 135.8+2.5/164.5 |
| Tier III mode | 136.6+3.9/165.0 | 136.1+3.0/164.5 | 140.5+2.5/170.0 |

Everllence B&W G50ME-C10.7-GI-HPSCR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 133.2+3.9/161.0 | 131.4+3.0/161.0 | 138.4+2.5/167.5 |
| Tier III mode | 134.1+3.9/162.0 | 133.6+3.0/161.5 | 138.8+2.5/168.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 9,500 |
| 6 | 11,400 |
| 7 | 13,300 |
| 8 | 15,200 |
| 9 | 17,100 |

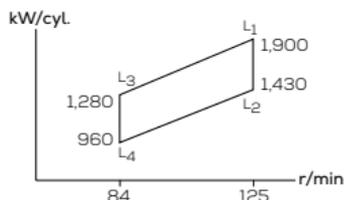Stroke: 2,214 mm/L₁ MEP: 21.0 bar**Everllence B&W S50ME-C10.7-GI****L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load EGB | 134.1+3.9/162.0 | 132.3+3.0/162.0 | 139.2+2.5/168.5 |

Everllence B&W S50ME-C10.7-GI-EcoEGR**L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 133.2+3.9/161.0 | 130.6+3.0/158.0 | 136.7+2.5/165.5 |
| Tier III mode | 137.5+3.9/166.0 | 137.0+3.0/165.5 | 141.4+2.5/171.0 |


Everllence B&W S50ME-C10.7-GI-HPSCR**L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 134.1+3.9/162.0 | 132.3+3.0/162.0 | 139.2+2.5/168.5 |
| Tier III mode | 134.9+3.9/163.0 | 134.4+3.0/162.5 | 139.7+2.5/169.0 |

Note: S50ME-C10.7-GI-EGRBP available on request

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 9,500 |
| 6 | 11,400 |
| 7 | 13,300 |
| 8 | 15,200 |
| 9 | 17,100 |

Stroke: 2,214 mm/L₁ MEP: 21.0 bar

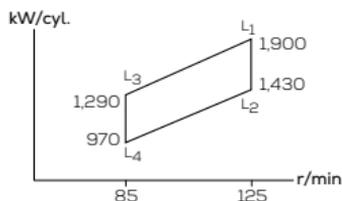

Everlence B&W S50ME-C9.7-GI

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|-----------------|-----------------|-----------------|
| Low-load EGB | 135.7+4.0/164.0 | 136.9+3.0/164.0 | 145.2+2.5/170.5 |

Everlence B&W S50ME-C9.7-GI-EGRBP

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]


| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 135.7+4.0/164.0 | 137.4+3.0/164.5 | 146.5+2.5/172.0 |
| Tier III mode | 140.0+4.0/169.0 | 142.1+3.0/168.0 | 148.6+2.5/174.5 |

Everlence B&W S50ME-C9.7-GI-HPSCR

L₁ dual fuel mode (SGC+SPOC (1.5%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|-----------------|-----------------|-----------------|
| Tier II mode | 135.7+4.0/164.0 | 136.9+3.0/164.0 | 145.2+2.5/170.5 |
| Tier III mode | 136.6+4.0/165.0 | 139.1+3.0/164.5 | 145.6+2.5/171.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 6,950 |
| 6 | 8,340 |
| 7 | 9,730 |
| 8 | 11,120 |

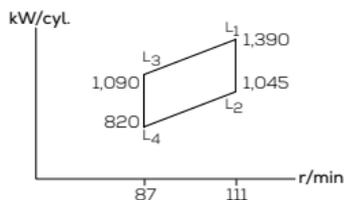Stroke: 2,250 mm/L₁ MEP: 21.0 bar**Everllence B&W G45ME-C9.5-GI****L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|------------------|------------------|-----------------|
| Low-load EGB | 130.9+13.6/168.0 | 134.1+10.4/168.0 | 143.4+8.5/174.5 |

Everllence B&W G45ME-C9.5-GI-EGRBP**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**


| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 130.9+13.6/168.0 | 134.5+10.4/168.5 | 144.7+8.5/176.0 |
| Tier III mode | 135.2+13.6/173.0 | 139.2+10.4/172.0 | 146.8+8.5/178.5 |

Everllence B&W G45ME-C9.5-GI-HPSCR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 130.9+13.6/168.0 | 134.1+10.4/168.0 | 143.4+8.5/174.5 |
| Tier III mode | 131.8+13.6/169.0 | 136.2+10.4/168.5 | 143.9+8.5/175.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 4,350 |
| 6 | 5,220 |
| 7 | 6,090 |
| 8 | 6,960 |

Stroke: 1,550 mm/L₁ MEP: 21.0 bar

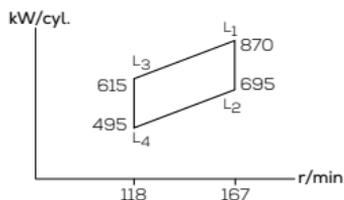

Everllence B&W S35ME-C9.7-GI

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|------------------|------------------|-----------------|
| Low-load EGB | 131.8+13.6/169.0 | 134.1+10.4/168.0 | 143.4+8.5/174.5 |

Everllence B&W S35ME-C9.7-GI-HPSCR

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 131.8+13.6/169.0 | 134.1+10.4/168.0 | 143.4+8.5/174.5 |
| Tier III mode | 132.7+13.6/170.0 | 136.2+10.4/168.5 | 143.9+8.5/175.0 |


Note: All fuel consumption figures are based on engine driven HPS

Methanol (LGIM)

| Fuel variants | Page |
|---|-------------|
| Fuel oil | 23 |
| Methane/LNG (GI) | 35 |
| Methanol (LGIM) | 51 |
| LPG (LGIP) | 61 |
| Ethane/LEG (GIE) | 65 |
| Specifications (dimensions and dry masses) | 69 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 6 | 41,220 |
| 7 | 48,090 |
| 8 | 54,960 |
| 9 | 61,830 |
| 10 | 68,700 |
| 11 | 75,570 |
| 12 | 82,440 |

Stroke: 3,460 mm/L₁ MEP: 21.0 bar

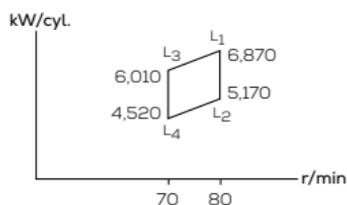

Everlence B&W G95ME-C10.7-LGIM

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|------------------|-----------------|-----------------|
| Low-load SEQ | 298.5+12.8/154.0 | 307.1+9.8/158.0 | 327.1+8.1/164.5 |

Everlence B&W G95ME-C10.7-LGIM-EGRTC

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 298.5+12.8/154.0 | 307.1+9.8/158.0 | 327.1+8.1/164.5 |
| Tier III mode | 311.4+12.8/160.0 | 322.2+9.8/162.0 | 335.7+8.1/168.5 |


Everlence B&W G95ME-C10.7-LGIM-EcoEGR

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 300.7+12.8/155.0 | 305.0+9.8/154.0 | 322.8+8.1/162.5 |
| Tier III mode | 311.4+12.8/160.0 | 321.1+9.8/161.5 | 332.5+8.1/167.0 |

Note: LPSCR available on request

| Cyl. | L ₁ kW |
|------|-------------------|
| 6* | 28,260 |
| 7 | 32,970 |
| 8 | 37,680 |
| 9** | 42,390 |

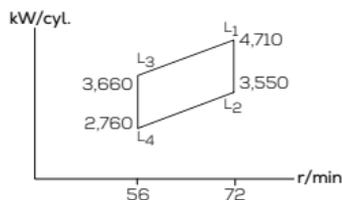Stroke: 3,720 mm/L₁ MEP: 21.0 bar**Everllence B&W G80ME-C10.7-LGIM****L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|------------------|-----------------|-----------------|
| Low-load SEQ | 300.5+12.8/155.0 | 309.2+9.8/159.0 | 329.2+8.1/165.5 |

Everllence B&W G80ME-C10.7-LGIM-EGRTC**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 300.5+12.8/155.0 | 309.2+9.8/159.0 | 329.2+8.1/165.5 |
| Tier III mode | 313.4+12.8/161.0 | 324.2+9.8/163.0 | 337.7+8.1/169.5 |

Everllence B&W G80ME-C10.7-LGIM-EcoEGR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 302.7+12.8/156.0 | 307.0+9.8/155.0 | 324.9+8.1/163.5 |
| Tier III mode | 313.4+12.8/161.0 | 323.1+9.8/162.5 | 334.5+8.1/168.0 |

Everllence B&W G80ME-C10.7-LGIM-HPSCR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 300.5+12.8/155.0 | 309.2+9.8/159.0 | 329.2+8.1/165.5 |
| Tier III mode | 307.0+12.8/158.0 | 316.7+9.8/159.5 | 330.2+8.1/166.0 |


Note: LPSCR available on request

* 6-cylinder engines can be ordered with reduced or external moment compensation depending on rating and ship dynamics. Evaluation is made on request.

** Available on request for HPSCR

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 18,850 |
| 6 | 22,620 |

Stroke: 3,256 mm/L₁ MEP: 21.0 bar

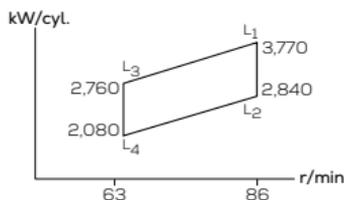

Everlence B&W G70ME-C10.7-LGIM

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|------------------|-----------------|-----------------|
| Low-load EGB | 308.9+12.9/159.0 | 311.2+9.9/160.0 | 331.2+8.2/166.5 |

Everlence B&W G70ME-C10.7-LGIM-EGRBP

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 315.3+12.9/162.0 | 325.1+9.9/163.5 | 340.8+8.2/171.0 |
| Tier III mode | 317.5+12.9/163.0 | 325.1+9.9/163.5 | 336.6+8.2/169.0 |

Everlence B&W G70ME-C10.7-LGIM-EcoEGR

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]


| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 306.7+12.9/158.0 | 309.0+9.9/156.0 | 326.9+8.2/164.5 |
| Tier III mode | 317.5+12.9/163.0 | 325.1+9.9/163.5 | 336.6+8.2/169.0 |

Everlence B&W G70ME-C10.7-LGIM-HPSCR

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 308.9+12.9/159.0 | 311.2+9.9/160.0 | 331.2+8.2/166.5 |
| Tier III mode | 311.0+12.9/160.0 | 318.7+9.9/160.5 | 332.3+8.2/167.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 14,200 |
| 6 | 17,040 |
| 7 | 19,880 |
| 8 | 22,720 |

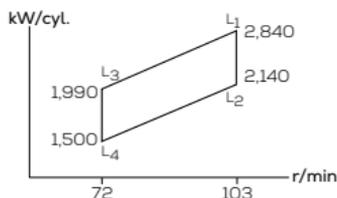Stroke: 2,790 mm/L₁ MEP: 21.0 bar**Everllence B&W G60ME-C10.5-LGIM****L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|------------------|------------------|-----------------|
| Low-load EGB | 316.8+13.3/163.0 | 319.2+10.1/164.0 | 339.3+8.4/170.5 |

Everllence B&W G60ME-C10.5-LGIM-EcoEGR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**


| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 314.6+13.3/162.0 | 317.1+10.1/160.0 | 335.1+8.4/168.5 |
| Tier III mode | 325.4+13.3/167.0 | 333.2+10.1/167.5 | 344.7+8.4/173.0 |

Everllence B&W G60ME-C10.5-LGIM-HPSCR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 316.8+13.3/163.0 | 319.2+10.1/164.0 | 339.3+8.4/170.5 |
| Tier III mode | 318.9+13.3/164.0 | 326.7+10.1/164.5 | 340.4+8.4/171.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 12,450 |
| 6 | 14,940 |
| 7 | 17,430 |
| 8 | 19,920 |

Stroke: 2,400 mm/L₁ MEP: 21.0 bar

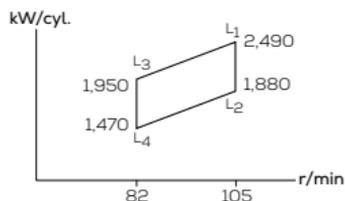

Everlence B&W S60ME-C10.7-LGIM

| | L ₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh] | | |
|--------------|--|-----------------|-----------------|
| | 50% | 75% | 100% |
| Low-load EGB | 310.9+13.0/160.0 | 313.2+9.9/161.0 | 333.2+8.2/167.5 |

Everlence B&W S60ME-C10.7-LGIM-EGRBP

| | L ₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh] | | |
|---------------|--|-----------------|-----------------|
| | 50% | 75% | 100% |
| Tier II mode | 317.3+13.0/163.0 | 327.1+9.9/164.5 | 342.9+8.2/172.0 |
| Tier III mode | 319.5+13.0/164.0 | 327.1+9.9/164.5 | 338.6+8.2/170.0 |


Everlence B&W S60ME-C10.7-LGIM-EcoEGR

| | L ₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh] | | |
|---------------|--|-----------------|-----------------|
| | 50% | 75% | 100% |
| Tier II mode | 308.7+13.0/159.0 | 311.0+9.9/157.0 | 328.9+8.2/165.5 |
| Tier III mode | 319.5+13.0/164.0 | 327.1+9.9/164.5 | 338.6+8.2/170.0 |

Everlence B&W S60ME-C10.7-LGIM-HPSCR

| | L ₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh] | | |
|---------------|--|-----------------|-----------------|
| | 50% | 75% | 100% |
| Tier II mode | 310.9+13.0/160.0 | 313.2+9.9/161.0 | 333.2+8.2/167.5 |
| Tier III mode | 313.0+13.0/161.0 | 320.7+9.9/161.5 | 334.3+8.2/168.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 8,600 |
| 6 | 10,320 |
| 7 | 12,040 |
| 8 | 13,760 |

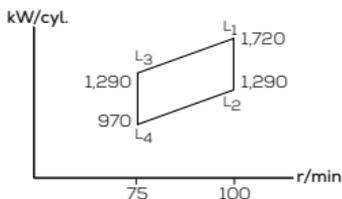Stroke: 2,500 mm/L₁ MEP: 21.0 bar**Everllence B&W G50ME-C10.7-LGIM****L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|------------------|-----------------|-----------------|
| Low-load EGB | 313.0+13.0/161.0 | 313.2+9.9/161.0 | 333.2+8.2/167.5 |

Everllence B&W G50ME-C10.7-LGIM-EGRBP**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 319.5+13.0/164.0 | 327.1+9.9/164.5 | 342.9+8.2/172.0 |
| Tier III mode | 321.6+13.0/165.0 | 327.1+9.9/164.5 | 338.6+8.2/170.0 |

Everllence B&W G50ME-C10.7-LGIM-EcoEGR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**


| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 310.9+13.0/160.0 | 311.0+9.9/157.0 | 328.9+8.2/165.5 |
| Tier III mode | 321.6+13.0/165.0 | 327.1+9.9/164.5 | 338.6+8.2/170.0 |

Everllence B&W G50ME-C10.7-LGIM-HPSCR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 313.0+13.0/161.0 | 313.2+9.9/161.0 | 333.2+8.2/167.5 |
| Tier III mode | 315.2+13.0/162.0 | 320.7+9.9/161.5 | 334.3+8.2/168.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 9,500 |
| 6 | 11,400 |
| 7 | 13,300 |
| 8 | 15,200 |
| 9 | 17,100 |

Stroke: 2,214 mm/L₁ MEP: 21.0 bar

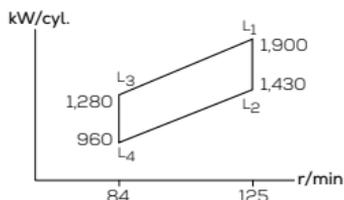

Everllence B&W S50ME-C10.7-LGIM

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|--------------|------------------|------------------|-----------------|
| Low-load EGB | 315.0+13.1/162.0 | 315.2+10.0/162.0 | 335.3+8.3/168.5 |

Everllence B&W S50ME-C10.7-LGIM-EcoEGR

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 312.9+13.1/161.0 | 313.1+10.0/158.0 | 331.0+8.3/166.5 |
| Tier III mode | 323.6+13.1/166.0 | 329.1+10.0/165.5 | 340.6+8.3/171.0 |


Everllence B&W S50ME-C10.7-LGIM-HPSCR

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 315.0+13.1/162.0 | 315.2+10.0/162.0 | 335.3+8.3/168.5 |
| Tier III mode | 317.2+13.1/163.0 | 322.7+10.0/162.5 | 336.3+8.3/169.0 |

Note: S50ME-C10.7-LGIM-EGRBP available on request

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 6,950 |
| 6 | 8,340 |
| 7 | 9,730 |
| 8 | 11,120 |

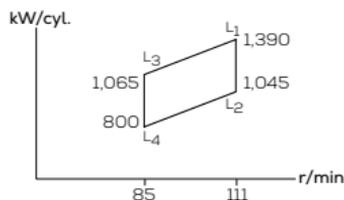Stroke: 2,250 mm/L₁ MEP: 21.0 bar**Everllence B&W G45ME-C9.7-LGIM****L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|------------------|------------------|-----------------|
| Low-load EGB | 326.9+13.6/168.0 | 327.3+10.4/168.0 | 347.5+8.5/174.5 |

Everllence B&W G45ME-C9.7-LGIM-EGRBP**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 326.9+13.6/168.0 | 328.4+10.4/168.5 | 350.7+8.5/176.0 |
| Tier III mode | 337.6+13.6/173.0 | 342.3+10.4/172.0 | 356.1+8.5/178.5 |


Everllence B&W G45ME-C9.7-LGIM-EcoEGR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 324.7+13.6/167.0 | 325.1+10.4/164.0 | 343.2+8.5/172.5 |
| Tier III mode | 335.4+13.6/172.0 | 341.2+10.4/171.5 | 352.9+8.5/177.0 |

Everllence B&W G45ME-C9.7-LGIM-HPSCR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 326.9+13.6/168.0 | 327.3+10.4/168.0 | 347.5+8.5/174.5 |
| Tier III mode | 329.0+13.6/169.0 | 334.8+10.4/168.5 | 348.6+8.5/175.0 |

Everllence

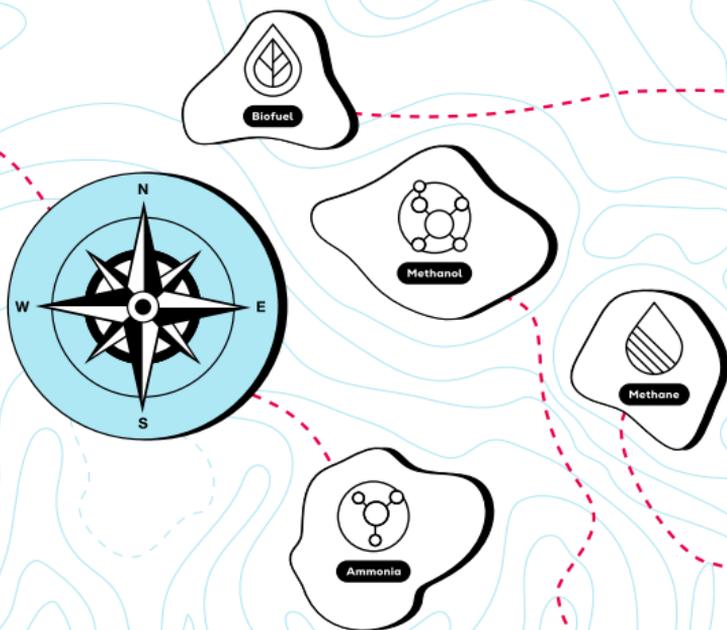

Navigate the future of shipping

Leading the way in sustainable two-stroke propulsion


The unrivaled flexibility of Everllence B&W two-stroke engines is the key to future-proof propulsion. Our proven dual-fuel engines operate on a broad variety of alternative fuels including methanol, methane, LPG, ethane and soon ammonia. Our retrofit capabilities let you adapt your current assets and give you even more flexibility. Future-proof your fleet with Everllence B&W newbuilds and retrofits.

LPG (LGIP)

| Fuel variants | Page |
|---|-------------|
| Fuel oil | 23 |
| Methane/LNG (GI) | 35 |
| Methanol (LGIM) | 51 |
| LPG (LGIP) | 61 |
| Ethane/LEG (GIE) | 65 |
| Specifications (dimensions and dry masses) | 69 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 14,200 |
| 6 | 17,040 |
| 7 | 19,880 |
| 8 | 22,720 |

Stroke: 2,790 mm/L₁ MEP: 21.0 bar

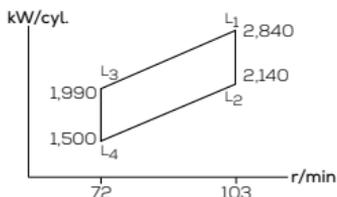

Everllence B&W G60ME-C10.5-LGIP

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]


| | 50% | 75% | 100% |
|--------------|------------------|-----------------|-----------------|
| Low-load EGB | 139.1+13.0/160.0 | 142.4+9.9/161.0 | 149.7+8.2/167.5 |

Everllence B&W G60ME-C10.5-LGIP-HPSCR

L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------|------------------|-----------------|-----------------|
| Tier II mode | 139.1+13.0/160.0 | 142.4+9.9/161.0 | 149.7+8.2/167.5 |
| Tier III mode | 140.1+13.0/161.0 | 142.9+9.9/161.5 | 150.2+8.2/168.0 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 8,600 |
| 6 | 10,320 |
| 7 | 12,040 |
| 8 | 13,760 |
| 9 | 15,480 |

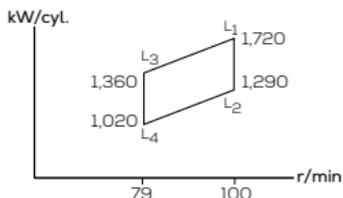Stroke: 2,500 mm/L₁ MEP: 21.0 bar**Everlence B&W G50ME-C9.6-LGIP****L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|------------------|------------------|-----------------|
| Low-load EGB | 143.5+13.3/165.0 | 145.9+10.2/165.0 | 153.3+8.4/171.5 |

Everlence B&W G50ME-C9.6-LGIP-HPSCR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 143.5+13.3/165.0 | 145.9+10.2/165.0 | 153.3+8.4/171.5 |
| Tier III mode | 144.4+13.3/166.0 | 146.4+10.2/165.5 | 153.7+8.4/172.0 |

Forever power. Forever decarbonization. Forever excellence.

We move big things to zero with future-fuel engines.

Global shipping is advancing towards sustainability, and we're developing engines powered by climate-neutral fuels such as green methanol, hydrogen, and synthetic natural gas (SNG). Following our world-first methanol dual fuel engine, we introduced the first ammonia engine in our portfolio. Working with the marine industry, we can move ships with zero emissions.

[everllence.com](https://www.everllence.com)

Only one thing has changed.
MAN Energy Solutions is now:


Everllence



Ethane/LEG (GIE)

| Fuel variants | Page |
|---|-------------|
| Fuel oil | 23 |
| Methane/LNG (GI) | 35 |
| Methanol (LGIM) | 51 |
| LPG (LGIP) | 61 |
| Ethane/LEG (GIE) | 65 |
| Specifications (dimensions and dry masses) | 69 |

| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 13,400 |
| 6 | 16,080 |
| 7 | 18,760 |
| 8 | 21,440 |

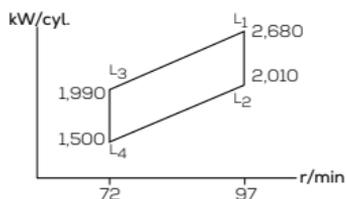
Stroke: 2,790 mm/L₁ MEP: 21.0 bar

Everllence B&W G60ME-C9.5-GIE
L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|---------------------|------------------|------------------|-----------------|
| Low-load EGB | 137.2+13.3/166.0 | 140.9+10.1/167.0 | 148.5+8.4/173.5 |

Everllence B&W G60ME-C9.5-GIE-HPSCR
L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]

| | 50% | 75% | 100% |
|----------------------|------------------|------------------|-----------------|
| Tier II mode | 137.2+13.3/166.0 | 140.9+10.1/167.0 | 148.5+8.4/173.5 |
| Tier III mode | 138.1+13.3/167.0 | 141.4+10.1/167.5 | 148.9+8.4/174.0 |
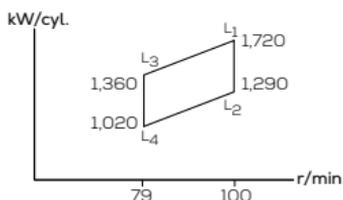
| Cyl. | L ₁ kW |
|------|-------------------|
| 5 | 8,600 |
| 6 | 10,320 |
| 7 | 12,040 |
| 8 | 13,760 |
| 9 | 15,480 |

Stroke: 2,500 mm/L₁ MEP: 21.0 bar**Everlence B&W G50ME-C9.5-GIE****L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|--------------|------------------|------------------|-----------------|
| Low-load EGB | 138.9+13.3/168.0 | 141.8+10.2/168.0 | 149.3+8.4/174.5 |

Everlence B&W G50ME-C9.5-GIE-HPSCR**L₁ dual fuel mode (SGC+SPOC (5.0%))/fuel oil mode (SFOC) [g/kWh]**

| | 50% | 75% | 100% |
|---------------|------------------|------------------|-----------------|
| Tier II mode | 138.9+13.3/168.0 | 141.8+10.2/168.0 | 149.3+8.4/174.5 |
| Tier III mode | 139.8+13.3/169.0 | 142.2+10.2/168.5 | 149.8+8.4/175.0 |

PrimeServ Omnicare

Everllence Moving big things to zero

**Your one-stop
service solution**

Welcome to PrimeServ Omnicare – a one-stop service solution that provides complete support for all your equipment, regardless of the manufacturer.

This means global and local expertise from the industry's most trusted specialist, whenever and wherever you need it.

PrimeServ Omnicare brings simplicity and cost-efficiency to your fleet, minimizing unplanned downtime, reducing costs, and extending the lifetime of your assets.

Visit our website for more insights:
www.everllence.com/services



Everllence

PrimeServ

Specifications

(dimensions and dry masses)

| Fuel variants | Page |
|---|-------------|
| Fuel oil | 23 |
| Methane/LNG (GI) | 35 |
| Methanol (LGIM) | 51 |
| LPG (LGIP) | 61 |
| Ethane/LEG (GIE) | 65 |
| Specifications (dimensions and dry masses) | 69 |

Specifications

| Dimensions: | | A | B | C | H1 |
|-------------|----|-------|-------|-------|--------|
| Fuel oil | mm | 1,574 | 5,380 | 2,060 | 16,100 |
| GI | mm | 1,574 | 5,380 | 2,060 | - |
| LGIM | mm | 1,574 | 5,380 | 2,060 | - |

| Cyl. distance | 6-9 cyl. | 10 cyl. | 11 cyl. | 12 cyl. |
|---------------|----------|-------------|-------------|-------------|
| mm | 1,574 | 1-6: 1,574 | 1-6: 1,574 | 1-6: 1,574 |
| mm | - | 7-10: 1,670 | 7-11: 1,670 | 7-12: 1,670 |

| Cylinders: | | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------------|----|--------|--------|--------|--------|--------|--------|--------|
| L _{min} | mm | 13,042 | 14,616 | 16,190 | 17,804 | 19,779 | 21,489 | 23,159 |

Dry mass


| Tier II | t | 1,220 | 1,360 | 1,615 | 1,780 | 1,950 | 2,130 | 2,320 |
|---------|---|-------|-------|-------|-------|-------|-------|-------|
|---------|---|-------|-------|-------|-------|-------|-------|-------|

Tier III (added)

| | | | | | | | | |
|-------|---|----|----|----|----|----|----|----|
| EGRTC | t | 16 | 17 | 18 | 19 | 20 | 21 | 31 |
| LPSCR | t | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Dual fuel (added)

| | | | | | | | | |
|------|---|---|----|----|----|----|----|----|
| GI | t | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
| LGIM | t | 9 | 10 | 11 | 12 | 13 | 14 | 15 |

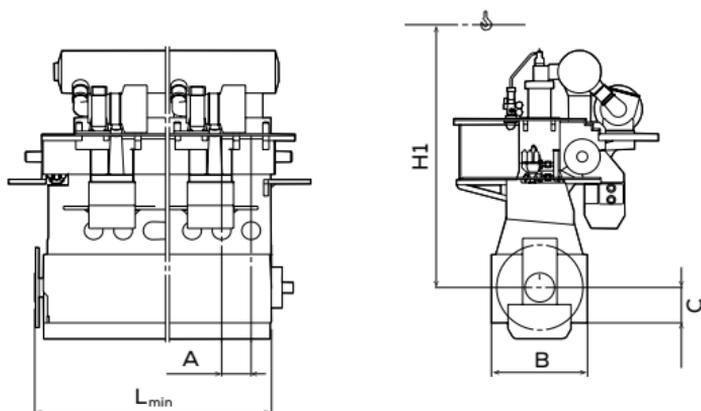

Specifications

| Dimensions: | | A | B | C | H1 |
|-------------|----|-------|-------|-------|--------|
| GI | mm | 1,574 | 5,380 | 2,060 | 16,100 |

| Cyl. distance | | 6-9 cyl. | 10 cyl. | 11 cyl. | 12 cyl. |
|---------------|--|----------|-------------|-------------|-------------|
| mm | | 1,574 | 1-6: 1,574 | 1-6: 1,574 | 1-6: 1,574 |
| mm | | | 7-10: 1,670 | 7-11: 1,670 | 7-12: 1,670 |

| Cylinders: | | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|----|--------|--------|--------|--------|--------|--------|--------|
| L_{min} | mm | 13,042 | 14,616 | 16,190 | 17,804 | 19,779 | 21,489 | 23,159 |

Dry mass


| Tier II | t | 1,220 | 1,360 | 1,615 | 1,780 | 1,950 | 2,130 | 2,320 |
|---------|---|-------|-------|-------|-------|-------|-------|-------|
|---------|---|-------|-------|-------|-------|-------|-------|-------|

Tier III (added)

| | | | | | | | | |
|-------|---|----|----|----|----|----|----|----|
| EGRTC | t | 16 | 17 | 18 | 19 | 20 | 21 | 31 |
| LPSCR | t | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Dual fuel (added)

| | | | | | | | | |
|----|---|---|---|----|----|----|----|----|
| GI | t | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
|----|---|---|---|----|----|----|----|----|

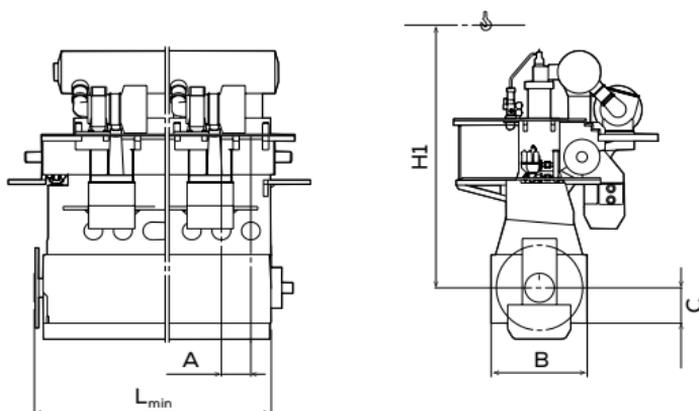

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 |
|-------------|----|-------|-------|-------|-------|--------|
| Fuel oil | mm | 1,400 | 5,018 | 5,254 | 1,960 | 15,750 |
| GI | mm | 1,400 | 5,018 | 5,254 | - | - |
| LGIM | mm | 1,400 | 5,018 | 5,254 | - | - |

| Cylinders: | | 6 | 7 | 8 | 9 |
|------------------|----|--------|--------|--------|--------|
| L _{min} | mm | 11,509 | 12,135 | 13,535 | 14,935 |

Dry mass


| Tier II | t | 900 | 1,000 | 1,110 | 1,240 |
|---------|---|-----|-------|-------|-------|
|---------|---|-----|-------|-------|-------|

Tier III (added)

| | | | | | |
|-------|---|----|----|----|----|
| EGRTC | t | 14 | 14 | 14 | 15 |
| HPSCR | t | 4 | 5 | 5 | - |
| LPSCR | t | 0 | 0 | 0 | 0 |

Dual fuel (added)

| | | | | | |
|------|---|---|---|---|----|
| GI | t | 6 | 7 | 8 | 9 |
| LGIM | t | 7 | 8 | 9 | 10 |

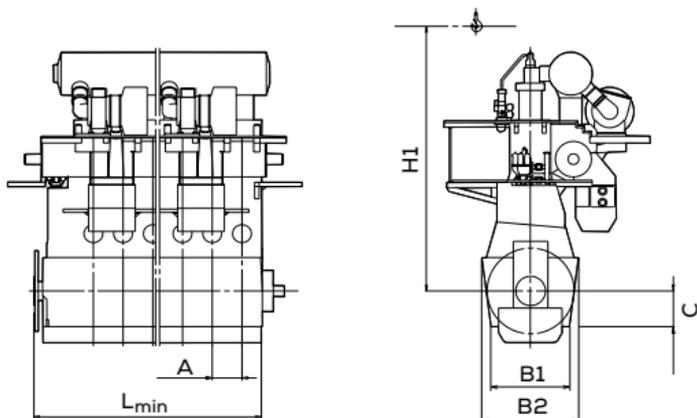

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 |
|-------------|----|-------|-------|-------|-------|--------|
| Fuel oil | mm | 1,400 | 5,018 | 5,254 | 1,960 | 15,750 |
| GI | mm | 1,400 | 5,018 | 5,254 | 1,960 | 15,750 |
| LGIM | mm | 1,400 | 5,018 | 5,254 | 1,960 | 15,750 |

| Cylinders: | | 6 | 7 | 8 | 9 |
|------------|----|--------|--------|--------|--------|
| L_{min} | mm | 11,509 | 12,135 | 13,535 | 14,935 |

Dry mass


| Tier II | t | 900 | 1,000 | 1,110 | 1,240 |
|---------|---|-----|-------|-------|-------|
|---------|---|-----|-------|-------|-------|

Tier III (added)

| | | | | | |
|-------|---|----|----|----|----|
| EGRTC | t | 14 | 14 | 14 | 15 |
| HPSCR | t | 4 | 5 | 5 | - |
| LPSCR | t | 0 | 0 | 0 | 0 |

Dual fuel (added)

| | | | | | |
|------|---|---|---|---|----|
| GI | t | 6 | 7 | 8 | 9 |
| LGIM | t | 7 | 8 | 9 | 10 |

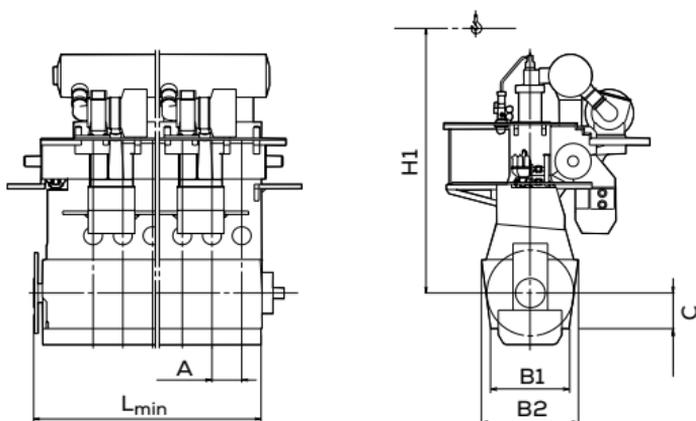

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 |
|-------------|----|-------|-------|-------|-------|----|
| Fuel oil | mm | 1,166 | 4,470 | 4,754 | 1,750 | - |
| GI | mm | 1,166 | 4,470 | 4,754 | 1,750 | - |
| LGIM | mm | 1,166 | 4,470 | 4,754 | 1,750 | - |

| Cylinders: | | 5 | 6 |
|------------|----|-------|-------|
| L_{min} | mm | 8,645 | 9,811 |

Dry mass


| | | | |
|---------|---|-----|-----|
| Tier II | t | 593 | 672 |
|---------|---|-----|-----|

Tier III (added)

| | | | |
|-------|---|----|----|
| EGRBP | t | 13 | 13 |
|-------|---|----|----|

Dual fuel (added)

| | | | |
|------|---|---|---|
| GI | t | 5 | 6 |
| LGIM | t | 6 | 7 |

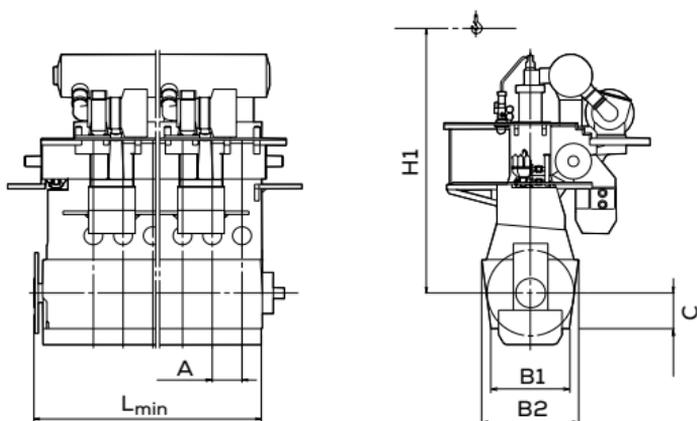

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 |
|-------------|----|-------|-------|-------|-------|--------|
| GI | mm | 1,044 | 4,470 | 4,628 | 1,750 | 13,625 |

| | | | | | | |
|------------|----|-------|--|--|--|-------|
| Cylinders: | | 5 | | | | 6 |
| L_{min} | mm | 7,399 | | | | 8,443 |

Dry mass


| | | | | | | |
|---------|---|-----|--|--|--|-----|
| Tier II | t | 525 | | | | 590 |
|---------|---|-----|--|--|--|-----|

Tier III (added)

| | | | | | | |
|-------|---|----|--|--|--|----|
| EGRBP | t | 11 | | | | 11 |
| HPSCR | t | 3 | | | | 3 |
| LPSCR | t | 0 | | | | 0 |

Dual fuel (added)

| | | | | | | |
|----|---|---|--|--|--|---|
| GI | t | 5 | | | | 6 |
|----|---|---|--|--|--|---|

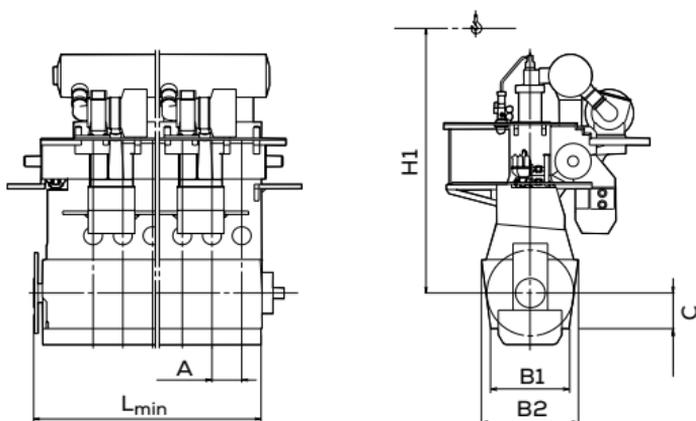

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H4 |
|-------------|----|-------|-------|-------|-------|--------|--------|
| Fuel oil | mm | 1,080 | 4,090 | 4,220 | 1,500 | 12,175 | 11,975 |
| GI | mm | 1,080 | 4,090 | 4,220 | 1,500 | 12,175 | 11,975 |
| LGIM | mm | 1,080 | 4,090 | 4,220 | 1,500 | - | - |
| LGIP | mm | 1,080 | 4,090 | 4,220 | 1,500 | 12,175 | 11,975 |

| Cylinders: | | 5 | 6 | 7 | 8 |
|------------|----|-------|-------|-------|--------|
| L_{min} | mm | 7,390 | 8,470 | 9,550 | 10,630 |

Dry mass


| Tier II | t | 395 | 440 | 490 | 555 |
|---------|---|-----|-----|-----|-----|
|---------|---|-----|-----|-----|-----|

Tier III (added)

| | | | | | |
|-------|---|----|----|----|----|
| EGRBP | t | 10 | 10 | 11 | 11 |
| HPSCR | t | 3 | 4 | 5 | 5 |

Dual fuel (added)

| | | | | | |
|------|---|---|---|---|---|
| GI | t | 5 | 5 | 6 | 7 |
| LGIM | t | 5 | 5 | 6 | 7 |
| LGIP | t | 5 | 5 | 6 | 7 |

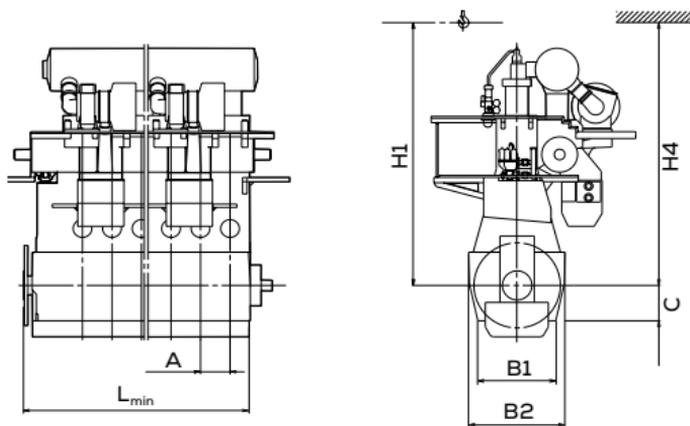

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-------|-------|-------|-------|--------|--------|--------|
| GIE | mm | 1,080 | 4,090 | 4,220 | 1,500 | 12,175 | 11,700 | 11,550 |

| Cylinders: | | 5 | 6 | 7 | 8 |
|------------------|----|-------|-------|-------|--------|
| L _{min} | mm | 7,390 | 8,470 | 9,550 | 10,630 |

Dry mass


| Tier II | t | 395 | 440 | 490 | 555 |
|---------|---|-----|-----|-----|-----|
|---------|---|-----|-----|-----|-----|

Tier III (added)

| HPSCR | t | 3 | 4 | 5 | 5 |
|-------|---|---|---|---|---|
|-------|---|---|---|---|---|

Dual fuel (added)

| GIE | t | 5 | 6 | 7 | 7 |
|-----|---|---|---|---|---|
|-----|---|---|---|---|---|

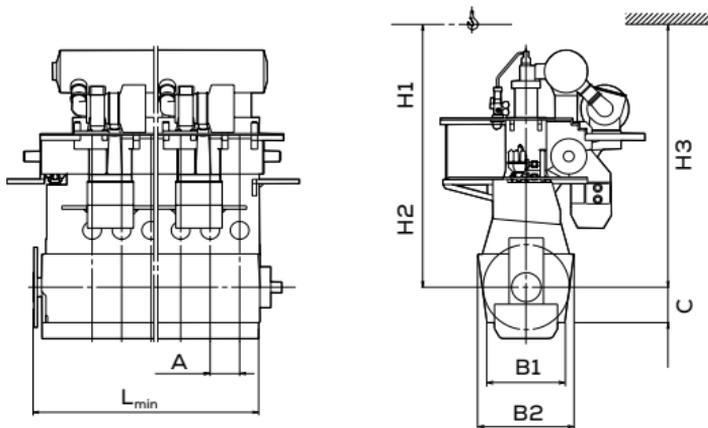

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-----|-------|-------|-------|----|----|----|
| Fuel oil | mm | 940 | 3,420 | 3,550 | 1,300 | - | - | - |
| GI | mm | 940 | 3,420 | 3,550 | 1,300 | - | - | - |
| LGIM | mm | 940 | 3,420 | 3,550 | 1,300 | - | - | - |

| Cylinders: | | 5 | 6 | 7 | 8 |
|------------|----|-------|-------|-------|-------|
| L_{min} | mm | 6,502 | 7,442 | 8,382 | 9,322 |

Dry mass


| Tier II | t | 320 | 345 | 370 | 410 |
|---------|---|-----|-----|-----|-----|
|---------|---|-----|-----|-----|-----|

Tier III (added)

| | | | | | |
|-------|---|----|----|----|----|
| EGRBP | t | 10 | 10 | 11 | 11 |
| HPSCR | t | 6 | 6 | 6 | 6 |

Dual fuel (added)

| | | | | | |
|------|---|---|---|---|---|
| GI | t | 5 | 5 | 6 | 7 |
| LGIM | t | 5 | 5 | 6 | 7 |

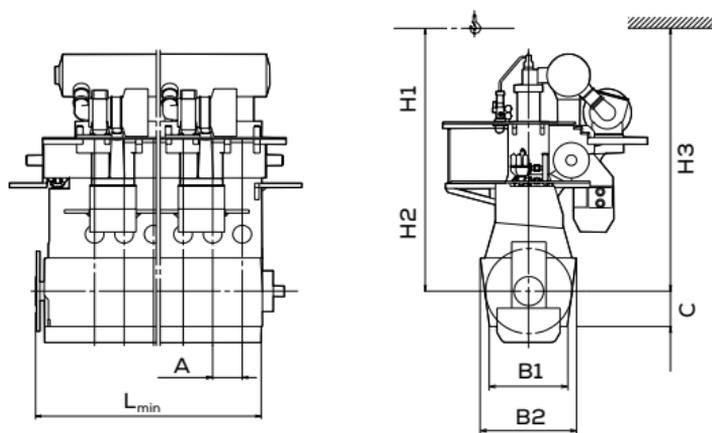

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-----|-------|-------|-------|--------|--------|--------|
| GI | mm | 940 | 3,420 | 3,550 | 1,300 | 10,500 | 10,025 | 10,375 |

| Cylinders: | | 5 | 6 | 7 | 8 |
|------------|----|-------|-------|-------|-------|
| L_{min} | mm | 6,502 | 7,442 | 8,382 | 9,322 |

Dry mass


| Tier II | t | 305 | 330 | 355 | 395 |
|---------|---|-----|-----|-----|-----|
|---------|---|-----|-----|-----|-----|

Tier III (added)

| | | | | | |
|-------|---|----|----|----|----|
| EGRBP | t | 10 | 10 | 11 | 11 |
| HPSCR | t | 6 | 6 | 6 | 6 |

Dual fuel (added)

| | | | | | |
|----|---|---|---|---|---|
| GI | t | 5 | 5 | 6 | 7 |
|----|---|---|---|---|---|

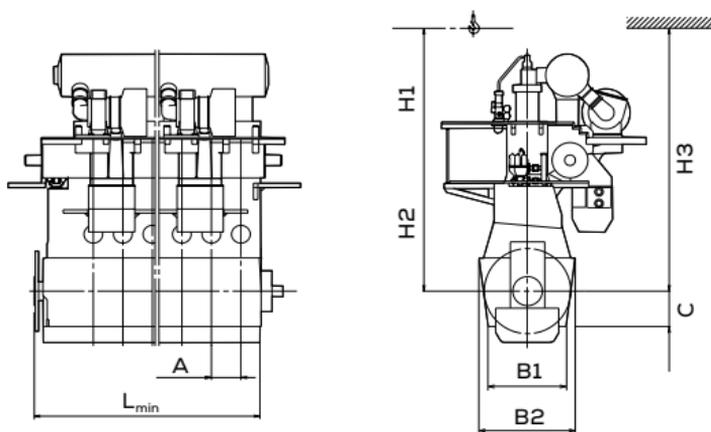

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-----|-------|-------|-------|----|----|----|
| Fuel oil | mm | 872 | 3,488 | 3,652 | 1,205 | - | - | - |
| GI | mm | 872 | 3,488 | 3,652 | 1,205 | - | - | - |
| LGIM | mm | 872 | 3,488 | 3,652 | 1,205 | - | - | - |

| Cylinders: | | 5 | 6 | 7 | 8 |
|------------|----|-------|-------|-------|-------|
| L_{min} | mm | 5,748 | 6,620 | 7,492 | 8,364 |

Dry mass


| Tier II | t | 214 | 249 | 280 | 315 |
|---------|---|-----|-----|-----|-----|
|---------|---|-----|-----|-----|-----|

Tier III (added)

| | | | | | |
|-------|---|----|----|----|----|
| EGRBP | t | 12 | 12 | 13 | 13 |
| HPSCR | t | 6 | 6 | 7 | 7 |

Dual fuel (added)

| | | | | | |
|------|---|---|---|---|---|
| GI | t | 4 | 4 | 5 | 5 |
| LGIM | t | 7 | 7 | 8 | 9 |

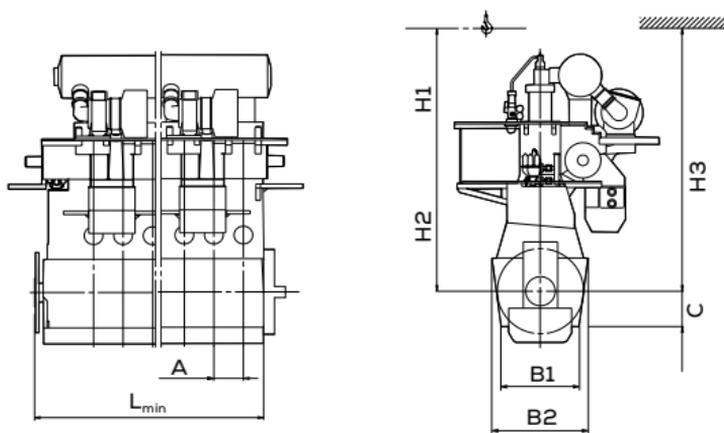

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-----|-------|-------|-------|--------|--------|-------|
| LGIM | mm | 872 | 3,776 | 3,652 | 1,205 | 10,775 | 10,075 | 9,825 |

| Cylinders: | | 5 | 6 | 7 | 8 | 9 |
|------------------|----|-------|-------|-------|-------|-------|
| L _{min} | mm | 5,748 | 6,620 | 7,492 | 8,364 | 9,236 |

Dry mass


| | | | | | | |
|---------|---|-----|-----|-----|-----|-----|
| Tier II | t | 211 | 246 | 276 | 311 | 346 |
|---------|---|-----|-----|-----|-----|-----|

Tier III (added)

| | | | | | | |
|-------|---|----|----|----|----|----|
| EGRBP | t | 12 | 12 | 13 | 13 | 13 |
| HPSCR | t | 6 | 6 | 7 | 7 | 7 |

Dual fuel (added)

| | | | | | | |
|------|---|---|---|---|---|----|
| LGIM | t | 7 | 7 | 8 | 9 | 10 |
|------|---|---|---|---|---|----|

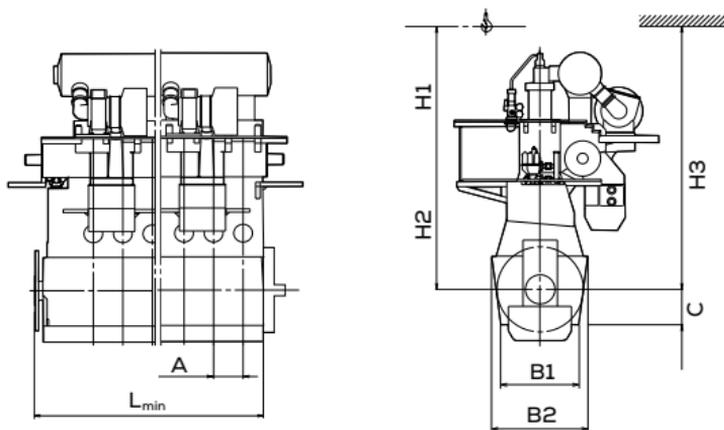

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-----|-------|-------|-------|--------|--------|-------|
| GIE | mm | 872 | 3,776 | 3,652 | 1,205 | 10,775 | 10,075 | 9,825 |

| Cylinders: | | 5 | 6 | 7 | 8 | 9 |
|------------|----|-------|-------|-------|-------|-------|
| L_{min} | mm | 5,748 | 6,620 | 7,492 | 8,364 | 9,236 |

Dry mass


| | | | | | | |
|---------|---|-----|-----|-----|-----|-----|
| Tier II | t | 211 | 246 | 276 | 311 | 346 |
|---------|---|-----|-----|-----|-----|-----|

Tier III (added)

| | | | | | | |
|-------|---|---|---|---|---|---|
| HPSCR | t | 6 | 6 | 7 | 7 | 7 |
|-------|---|---|---|---|---|---|

Dual fuel (added)

| | | | | | | |
|-----|---|---|---|---|---|---|
| GIE | t | 4 | 4 | 5 | 5 | 6 |
|-----|---|---|---|---|---|---|

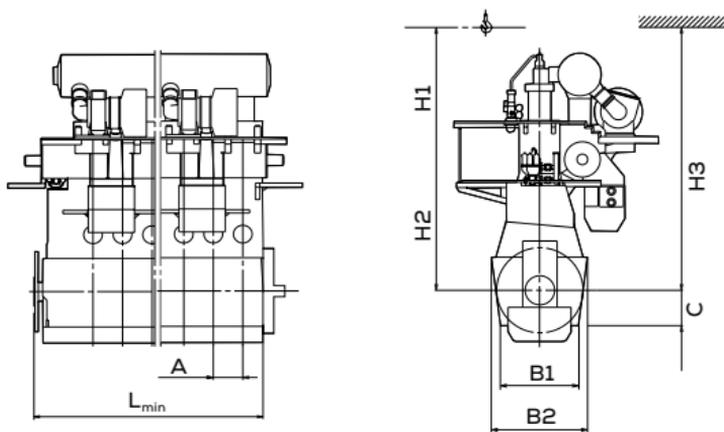

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-----|-------|-------|-------|----|----|----|
| Fuel oil | mm | 875 | 3,350 | 3,290 | 1,190 | - | - | - |
| GI | mm | 875 | 3,350 | 3,290 | 1,190 | - | - | - |
| LGIM | mm | 875 | 3,350 | 3,290 | 1,190 | - | - | - |

| Cylinders: | | 5 | 6 | 7 | 8 | 9 |
|------------|----|-------|-------|-------|-------|-------|
| L_{min} | mm | 5,747 | 6,622 | 7,497 | 8,372 | 9,247 |

Dry mass


| Tier II | t | 195 | 226 | 262 | 293 | 324 |
|---------|---|-----|-----|-----|-----|-----|
|---------|---|-----|-----|-----|-----|-----|

Tier III (added)

| | | | | | | |
|-------|---|----|----|----|----|----|
| EGRBP | t | 12 | 12 | 13 | 13 | 13 |
| HPSCR | t | 6 | 6 | 6 | 6 | 6 |

Dual fuel (added)

| | | | | | | |
|------|---|---|---|---|---|----|
| GI | t | 4 | 4 | 5 | 5 | 6 |
| LGIM | t | 7 | 7 | 8 | 9 | 10 |

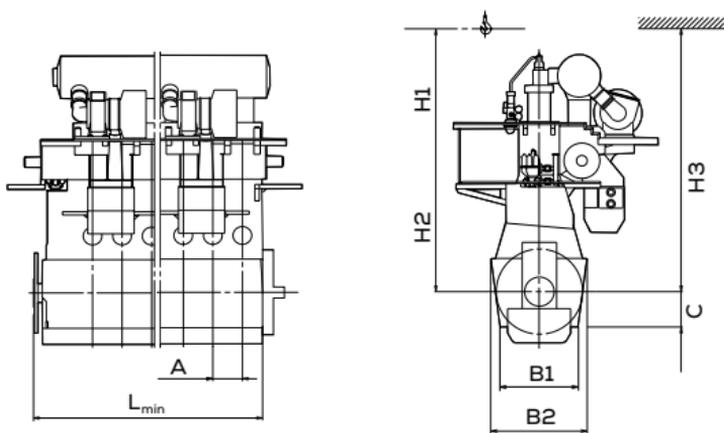

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-----|-------|-------|-------|-------|-------|-------|
| GI | mm | 875 | 3,350 | 3,290 | 1,190 | 9,875 | 9,200 | 8,850 |

| Cylinders: | | 5 | 6 | 7 | 8 | 9 |
|------------|----|-------|-------|-------|-------|-------|
| L_{min} | mm | 5,747 | 6,622 | 7,497 | 8,372 | 9,247 |

Dry mass


| Tier II | t | 193 | 223 | 259 | 289 | 320 |
|---------|---|-----|-----|-----|-----|-----|
|---------|---|-----|-----|-----|-----|-----|

Tier III (added)

| | | | | | | |
|-------|---|----|----|----|----|----|
| EGRBP | t | 12 | 12 | 13 | 13 | 13 |
| HPSCR | t | 4 | 4 | 5 | 6 | 7 |

Dual fuel (added)

| | | | | | | |
|----|---|---|---|---|---|---|
| GI | t | 4 | 4 | 5 | 5 | 6 |
|----|---|---|---|---|---|---|

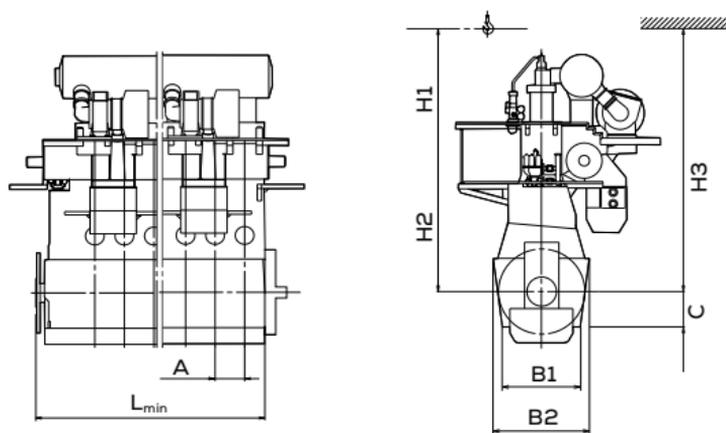

Specifications

| Dimensions: | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|-----|-------|-------|-------|-------|-------|-------|
| Fuel oil mm | 784 | 3,350 | 3,260 | 1,169 | 9,775 | 9,575 | 9,275 |
| LGIM mm | 784 | 3,350 | 3,260 | 1,169 | - | - | - |

| Cylinders: | 5 | 6 | 7 | 8 |
|--------------|-------|-------|-------|-------|
| L_{min} mm | 5,200 | 5,984 | 6,768 | 7,552 |

Dry mass


| Tier II | t | 165 | 186 | 209 | 238 |
|---------|---|-----|-----|-----|-----|
|---------|---|-----|-----|-----|-----|

Tier III (added)

| | | | | | |
|-------|---|----|----|----|----|
| EGRBP | t | 12 | 12 | 12 | 12 |
| HPSCR | t | 3 | 3 | 4 | 4 |

Dual fuel (added)

| | | | | | |
|------|---|---|---|---|---|
| LGIM | t | 7 | 7 | 8 | 9 |
|------|---|---|---|---|---|

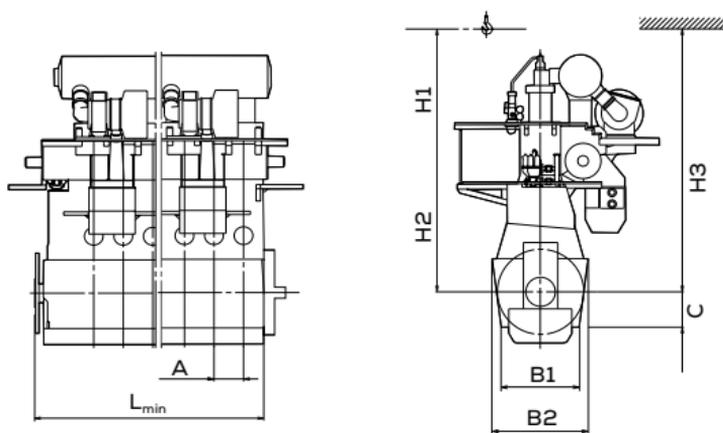

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-----|-------|-------|-------|-------|-------|-------|
| GI | mm | 784 | 3,350 | 3,260 | 1,169 | 9,775 | 9,575 | 9,275 |

| Cylinders: | | 5 | 6 | 7 | 8 |
|------------|----|-------|-------|-------|-------|
| L_{min} | mm | 5,200 | 5,984 | 6,768 | 7,552 |

Dry mass


| Tier II | t | 163 | 183 | 206 | 234 |
|---------|---|-----|-----|-----|-----|
|---------|---|-----|-----|-----|-----|

Tier III (added)

| | | | | | |
|-------|---|----|----|----|----|
| EGRBP | t | 12 | 12 | 12 | 12 |
| HPSCR | t | 3 | 3 | 4 | 4 |

Dual fuel (added)

| | | | | | |
|----|---|---|---|---|---|
| GI | t | 4 | 4 | 5 | 5 |
|----|---|---|---|---|---|

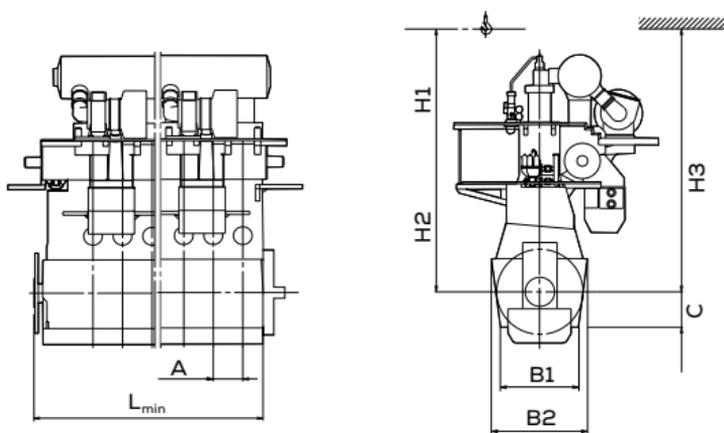

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-----|-------|-------|-----|-------|-------|-------|
| Fuel oil | mm | 700 | 2,650 | 2,610 | 950 | 7,975 | 7,475 | 7,200 |


| Cylinders: | | 5 | 6 | 7 | 8 | 9 |
|------------|----|-------|-------|-------|-------|-------|
| L_{min} | mm | 4,642 | 5,342 | 6,042 | 6,742 | 7,442 |

Dry mass

| Tier II | t | 107 | 126 | 142 | 157 | 189 |
|---------|---|-----|-----|-----|-----|-----|
|---------|---|-----|-----|-----|-----|-----|

Tier III (added)

| | | | | | | |
|-------|---|----|----|----|----|----|
| EGRBP | t | 10 | 10 | 10 | 10 | 10 |
| HPSCR | t | 3 | 3 | 4 | 4 | - |
| LPSCR | t | 0 | 0 | 0 | 0 | 0 |

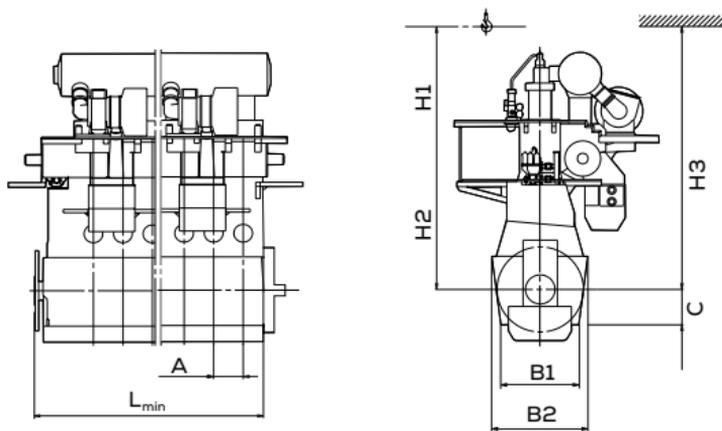

Specifications

| Dimensions: | | A | B1 | B2 | C | H1 | H2 | H3 |
|-------------|----|-----|-------|-------|-----|-------|-------|-------|
| Fuel oil | mm | 612 | 2,300 | 2,288 | 830 | 7,025 | 6,675 | 6,275 |
| GI | mm | 612 | 2,300 | 2,288 | 830 | 7,025 | 6,675 | 6,275 |

| Cylinders: | | 5 | 6 | 7 | 8 |
|------------|----|-------|-------|-------|-------|
| L_{min} | mm | 4,080 | 4,692 | 5,304 | 5,916 |

Dry mass


| Tier II | t | 77 | 87 | 98 | 108 |
|---------|---|----|----|----|-----|
|---------|---|----|----|----|-----|

Tier III (added)

| | | | | | |
|-------|---|---|---|---|---|
| EGRBP | t | 8 | 8 | 8 | 8 |
| HPSCR | t | 3 | 3 | 4 | 4 |
| LPSCR | t | 0 | 0 | 0 | 0 |

Dual fuel (added)

| | | | | | |
|----|---|---|---|---|---|
| GI | t | 3 | 3 | 4 | 4 |
|----|---|---|---|---|---|

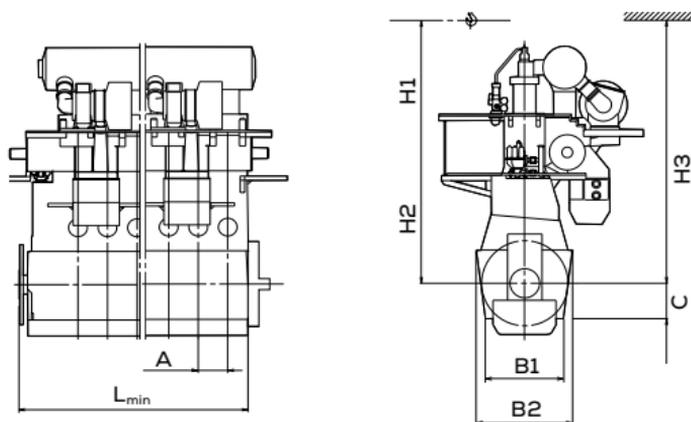

Everllence

A new chapter

Everllence B&W ME-LGIA

Powering the future with our two-stroke ammonia engine

When generated from renewable energy sources, ammonia has virtually no carbon footprint. We are aiming to launch full sales release of our two-stroke ammonia engine by the end of 2026: The Everllence B&W ME-LGIA. As newbuild or retrofit, it will offer a prominent pathway towards maritime decarbonization. Maritime transport is about to start a new, cleaner chapter with this valuable addition to our two-stroke dual-fuel engine portfolio.





Everllence
two-stroke
propulsion
systems



Alpha

Propeller Programme – FPP and CPP

The Alpha FPP (fixed pitch propeller) portfolio covers:

- power range of 4-40 MW per shaft
- blade configurations for 3-, 4-, 5- and 6-bladed propellers
- propellers with integrated shaft line and stern tube solutions
- a wide range of stern tube lube and sealing systems
 - oil, water, biodegradable oils.

The Alpha FPPs are characterised by the following benefits:


- High-efficient, hydrodynamically optimised blade profiles
 - Kappel designs available
- High reliability: robust approach with ample mechanical design margins
- High-efficient aft-ship integration with rudder, rudder bulb, ducts, etc.
- Layouts for complete two-stroke propulsion systems, e.g. with PTO solutions
- Plant calculations with upfront consideration to torsional vibration calculation (TVC), alignment and control systems.

Alpha CPP (controllable pitch propeller)

- Standard Mk 5 versions are 4-bladed – 3- and 5-bladed propellers are available upon request
- The figures stated after the VBS indicate the propeller hub diameter
- Standard blade/hub materials are Ni-Al-bronze; stainless steel is optional
- The propellers are available up to the highest ice classes; however the standard programme is based on 'no ice'
- A wide range of stern tube lube and sealing systems are offered for oil, water and biodegradable oils.

Alpha

Two-stroke propulsion system installation

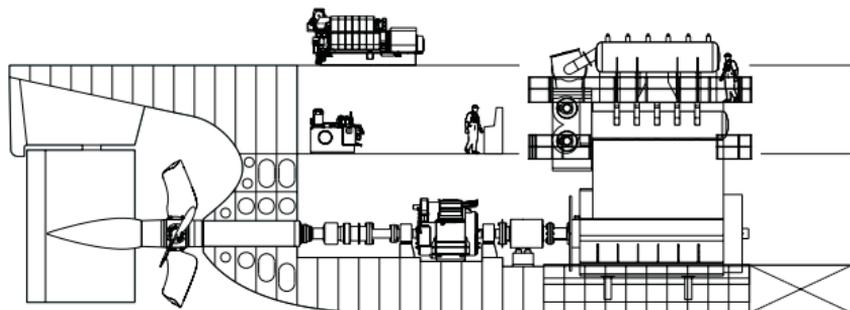

Complete powertrain with propeller and aft ship equipment.

The hydrodynamic edge

In the complex hydrodynamic entity embracing hull, propeller, and rudder - our CFD-based software masters the holistic approach of customised blade and rudder bulb designs.


We perform 'Resistance calculations' and 'Calculations of wake field', which form the basis for the following:

- Final propeller design
- Self-propulsion calculations
- Cavitation extent calculations
- Propeller-induced pressure impulses and CIS (cavitation inception speed)

Save the 'stock propeller test'; save time and save money.

With EcoBulb rudder bulb and propeller hub fairing cone installed, uniform flow without separation creates improved thrust ahead, and less power is required.

CFD model with streamlines and surface pressure distribution.

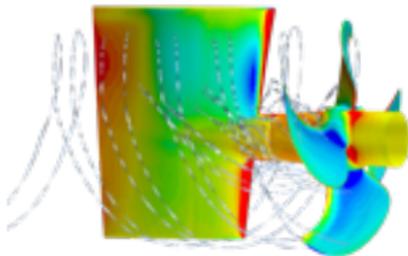


Everlence B&W standard package examples

| Cyl. | kW | Prop. speed r/min | D ¹⁾ mm | Hub VBS mm | Q mm | R mm | W _{min} mm | Prop. mass t ²⁾ |
|-----------------------|--------|----------------------|-----------------------|------------------|---------|---------|------------------------|-------------------------------|
| G70ME-C10.5-GI | | | | | | | | |
| 5 | 15,850 | 80 | 8,100 | 1,890 | 1,622 | 1,441 | 4,300 | 84.1 |
| 6 | 19,020 | 80 | 8,450 | 1,970 | 1,690 | 1,504 | 4,300 | 92.5 |

| G50ME-C10.7-GI/-LGIM/-LGIP | | | | | | | | |
|-----------------------------------|--------|-----|-------|-------|-------|-------|-------|------|
| 5 | 8,600 | 100 | 6,150 | 1,450 | 1,102 | 1,174 | 3,100 | 42.7 |
| 6 | 10,320 | 100 | 6,450 | 1,550 | 1,178 | 1,231 | 3,100 | 45.1 |
| 7 | 12,040 | 100 | 6,650 | 1,550 | 1,178 | 1,231 | 3,100 | 48.1 |
| 8 | 13,760 | 100 | 6,850 | 1,640 | 1,246 | 1,287 | 2,900 | 50.9 |
| 9 | 15,480 | 100 | 7,050 | 1,730 | 1,315 | 1,339 | 3,100 | 58.1 |

1) For optimal Kappel blades, the propeller diameter is reduced by an average of 3-10% compared to the listed standard diameters

2) The masses are stated for 4,000 mm stern tube and 8,000 mm propeller shaft

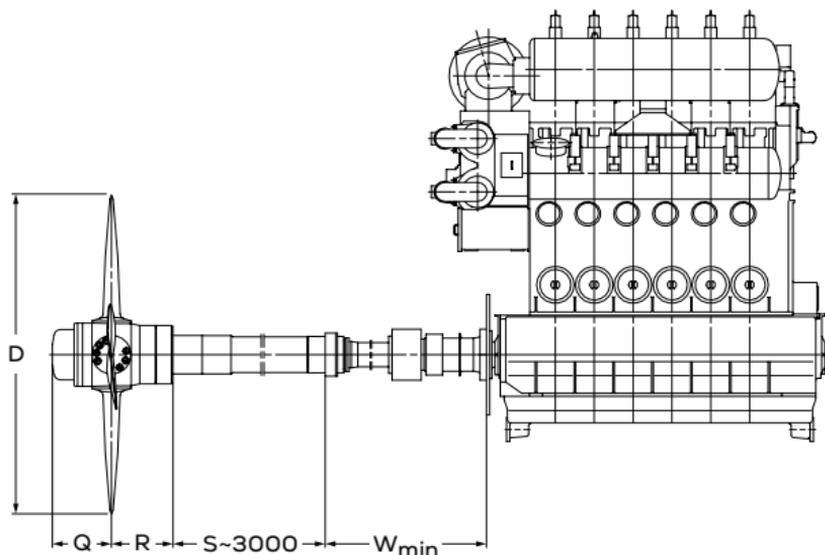

Everllence B&W standard package examples

| Cyl. | kW | Prop. speed r/min | D ¹⁾ mm | Hub VBS mm | Q mm | R mm | Wmin mm | Prop. mass t ²⁾ |
|----------------------|--------|----------------------|-----------------------|------------------|---------|---------|------------|-------------------------------|
| S50ME-C9.7-GI | | | | | | | | |
| 5 | 9,500 | 125 | 5,650 | 1,450 | 1,114 | 1,163 | 2,700 | 35.3 |
| 6 | 11,400 | 125 | 5,850 | 1,550 | 1,187 | 1,163 | 2,700 | 39.6 |
| 7 | 13,300 | 125 | 6,050 | 1,640 | 1,295 | 1,281 | 2,700 | 43.8 |
| 8 | 15,200 | 125 | 6,200 | 1,730 | 1,424 | 1,327 | 2,700 | 48.7 |
| 9 | 17,100 | 125 | 6,350 | 1,810 | 1,553 | 1,377 | 2,950 | 56.3 |

G45ME-C9.7/-LGIM

| | | | | | | | | |
|---|--------|-----|-------|-------|-------|-------|-------|------|
| 5 | 6,950 | 111 | 5,650 | 1,350 | 1,026 | 1,109 | 2,700 | 28.8 |
| 6 | 8,340 | 111 | 5,900 | 1,350 | 1,026 | 1,109 | 2,700 | 30.6 |
| 7 | 9,730 | 111 | 6,100 | 1,450 | 1,102 | 1,197 | 2,700 | 35.1 |
| 8 | 11,120 | 111 | 6,250 | 1,550 | 1,178 | 1,236 | 2,700 | 37.6 |

S40ME-C9.5

| | | | | | | | | |
|---|--------|-----|-------|-------|-------|-------|-------|------|
| 5 | 5,675 | 146 | 4,650 | 1,100 | 885 | 972 | 2,500 | 22.1 |
| 6 | 6,810 | 146 | 4,800 | 1,180 | 957 | 1,025 | 2,500 | 24.6 |
| 7 | 7,945 | 146 | 4,950 | 1,180 | 957 | 1,025 | 2,500 | 26.0 |
| 8 | 9,080 | 146 | 5,050 | 1,260 | 975 | 1,081 | 2,500 | 29.8 |
| 9 | 10,215 | 146 | 5,550 | 1,350 | 1,026 | 1,140 | 2,700 | 34.4 |


S35ME-C9.7/-GI

| | | | | | | | | |
|---|-------|-----|-------|-------|-----|-----|-------|------|
| 5 | 4,350 | 167 | 4,050 | 940 | 821 | 920 | 2,500 | 16.3 |
| 6 | 5,220 | 167 | 4,200 | 1,020 | 821 | 920 | 2,500 | 16.9 |
| 7 | 6,090 | 167 | 4,350 | 1,100 | 885 | 946 | 2,500 | 19.4 |
| 8 | 6,960 | 167 | 4,450 | 1,100 | 885 | 946 | 2,500 | 20.4 |

- 1) For optimal Kappel blades, the propeller diameter is reduced by an average of 3-10% compared to the listed standard diameters
- 2) The masses are stated for 3,000 mm stern tube and 8,000 mm propeller shaft

Alphatronic 3000 Propulsion control system

A high number of various FPP and CPP propulsion package applications are controlled by the Alphatronic 3000 system – customised for combinations of Everlence low and medium speed engines in a wide range of diesel-mechanical, hybrid or diesel-electric propulsion setups.

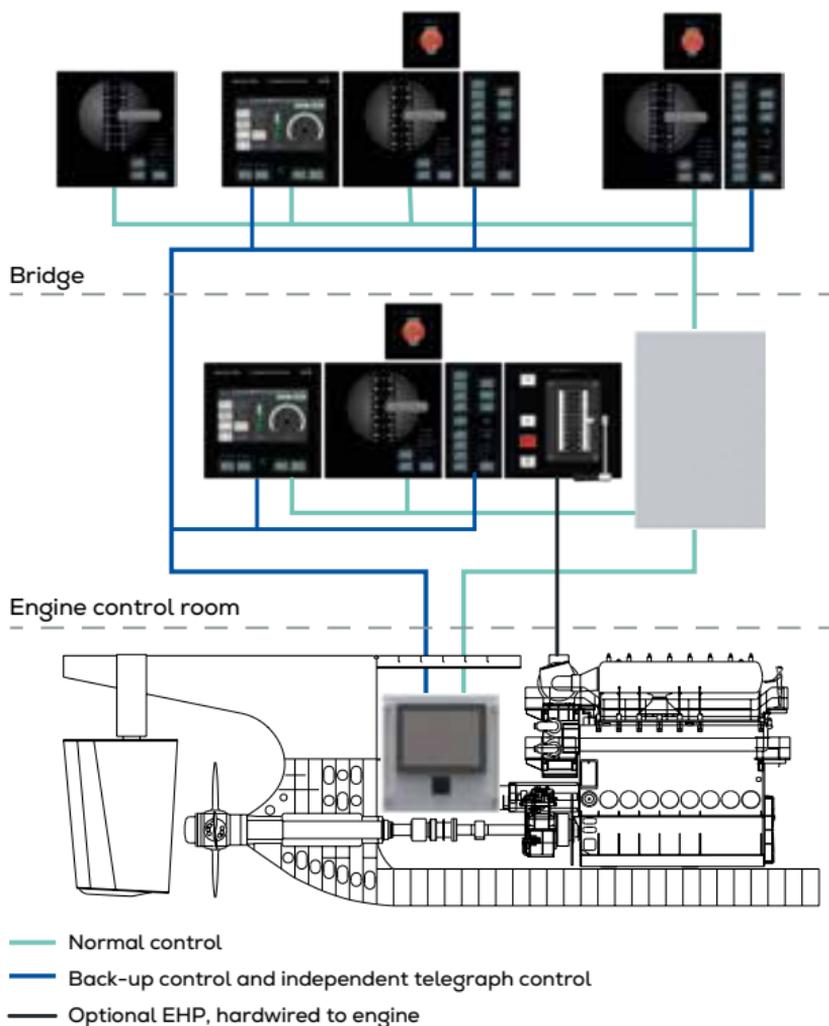



Alphatronic propulsion control system



Everllence
four-stroke
propulsion
engines



Everllence four-stroke propulsion engines – all emission requirements

Besides focus on power density and fuel economy, Everllence is committed to a steady reduction of the environmental impact of our engines.

IMO Tier II

Everllence has decreased NO_x emissions significantly by applying well-proven methods that ensure a cleaner and more efficient combustion process. Our four-stroke propulsion engines are IMO Tier II compliant by internal engine measures alone.

IMO Tier III

For operation in emission control areas (ECA), Everllence has developed a comprehensive range of selective catalytic reduction (SCR) systems that provides a tremendous reduction in NO_x levels surpassing IMO Tier III requirements.

The Everllence standard SCR system is available in fourteen different sizes covering our entire portfolio of four-stroke engines. Customised SCR systems are offered on demand.


Everllence has developed a complete range of SCR systems that work perfectly with our engines for maximum system efficiency. The intelligent exhaust gas temperature control allows significant savings in fuel consumptions as compared to third-party supplier systems.

Everllence SCR systems can be used for distillate fuel and residual fuel up to 3.5% sulphur, according to ISO 8217:2024 and in line with the specifications of Everllence.

Urea consumption

The urea consumption depends on engine type, selected performance characteristics (engine map), in case of an engine with ECOMAP capability, operating profile, fuel type, ambient conditions, type of reduction agent, etc.

For more detailed information on the expected level of urea consumption, please contact Everlence with your project specific request.

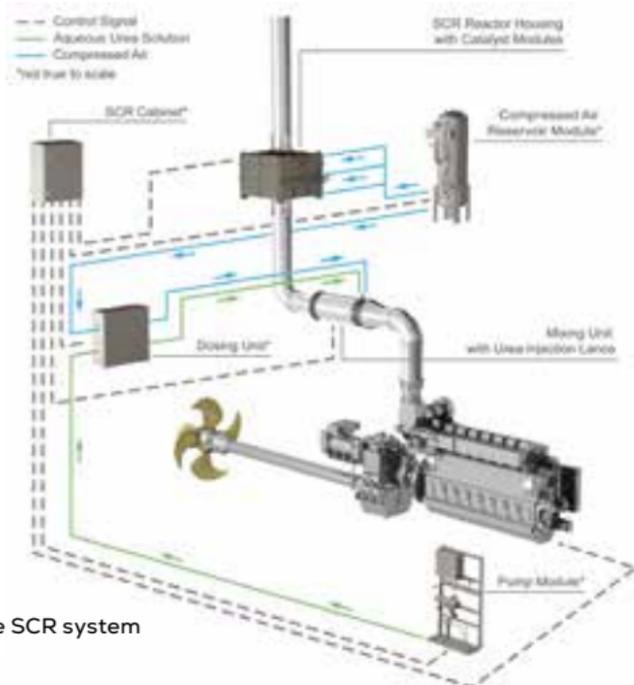

Everlence SCR system



The modular SCR component kit

Conventional injection engines

Our well-established engine types are used in a vast array of applications all over the world. Based on long-term experience of historical proportions, our engines are in continuous development to increase power, reduce emissions, increase reliability, reduce fuel oil consumption, and increase longevity. Our engines are the prime movers of choice in the maritime sector.

Common rail (CR) engines

The flexibility of our CR technology enables a substantial improvement of the combustion process that improves the fuel economy and reduces emission levels. It is particularly advantageous in the low-load and mid-load ranges where our unique ECOMAP system (optional) applies different engine maps to reduce fuel consumption while observing IMO emission limits. Another feature is our patented Boost Injection. Our engine control system senses a load increase at a very early stage and tremendously improves the load response with the activation of boost injection by the common rail control. In addition, exhaust gas opacity is markedly reduced, far below the visibility limit. Our CR engines run efficiently on liquid fuels complying with ISO 8217 DMA, DMZ, and DMB, and on residual fuels (HFO) up to 700 cSt (in compliance with ISO-F-RMK 700).

Diesel oil (D) engines

The V28/33D STC features very favourable ratios of power-to-weight and power-to-installation space. The combination of low fuel consumption, low emissions and reduced life cycle costs makes this engine the ideal solution for propulsion in high speed ferries, naval and off-shore patrol vessels. The V28/33D STC engine operates on distillates according to ISO 8217 DMA or equivalent fuel types.

With the 175D, Everllence is presenting a new power pack setting future standards in the high-speed diesel engine market. The 175D, developed especially for use in the shipping industry, is part of a product initiative aimed at providing Everllence customers with a product portfolio that covers every power requirement, from high-speed diesel engines to low-speed diesel engines.

Sequential turbocharging (STC)

The Everllence sequential turbocharging system operates with two high-efficiency turbochargers. Depending on the amount of charge air required, the second turbocharger is switched on or off. In this way, the engine is operated at its optimum operating point over the whole applicable load range.

The result is an extended operating envelope at low engine speeds, which gives a power reserve for ship acceleration, ship turning, sprints or towing. Furthermore, the STC system is characterised by a low thermal signature, decreased smoke emission, low vibrations and continuous low-load operation with reduced fuel consumption, which makes it the ideal solution for propulsion in naval applications and offshore patrol vessels.

Dual fuel (DF) engines for natural gas operation

Dual fuel engines for natural gas operation from Everllence run efficiently on liquid fuels or natural gas with very low emissions that are compliant with IMO limits.

On gaseous fuel, the engines comply with IMO Tier III without the need for additional exhaust gas aftertreatment, and on liquid fuel they either fulfill IMO Tier II, or IMO Tier III together with an SCR system. The possibility to switch over seamlessly from gas to diesel operation and vice versa provides full flexibility in multiple applications.

All dual fuel engines for natural gas operation can run on natural gas with a methane number higher than 80 without adjustments. For lower methane numbers, Everllence can deliver well-adapted solutions. The optimised combustion chamber ensures very low fuel consumption in both operational modes.

Methane emissions

CH₄ has a notably higher impact on the climate than CO₂, and the emission of unburnt CH₄ fuel not only reduces the overall operation efficiency, but also affects the environmental footprint of ship operation.

Modern low-pressure dual fuel four-stroke engines provide extensive means of controlling the combustion process. Due to the operating principle, CH₄ emissions cannot be avoided completely. However, based on extensive expertise and experience, the latest Everllence four-stroke dual fuel engines are designed to achieve the best possible results, for example:

- Halving of the CH₄ slip
- The newest developments have halved the values once more
- Further development is successfully ongoing to reach yet another 50% reduction
- Using smart vessel operation optimisation, effective emissions can be additionally reduced already today.

Synthetic fuel operation (optional)

The production of synthetic fuels differs, such as HVO, BTL, CTL, and GTL, according to DIN EN 15940, but the fuel properties are identical and need to comply with the requirements of Everllence.

For the intended use of these synthetic diesel fuels:

- Special considerations for fuel handling, storage, and fuel preparation have to be considered
- To be clarified, whether special equipment is needed on the engine or within the plant
- Change of engine performance to be clarified

If this option is needed, contact Everllence.

Operation on FAME – transesterified biofuel (optional)

For the intended use of FAME fuels, according to EN-14214 or ASTM D6751 and the additional requirements of Everllence: ISO has published a new version of the ISO 8217 Specifications of marine fuels standard and to support this transition it now allows the use of FAME up to a concentration of 100% in specific grades.

FAME has been used in road transportation for many years and vast experience is available.

However, its adoption within the maritime industry requires specific attention to be given to the handling of these products.

If this option is needed, contact Everllence.

Methanol

Everllence is developing methanol technology paths for various engine types. Green methanol is an important fuel option to decarbonise the operation of propulsion and auxiliary GenSet equipment. Ensuring the feasibility of later retrofits can be crucial to avoid the risk of stranded assets by enabling the concurrent adaption of ships to expected regulations and fuel supply.

Products marked with **Methanol ready*** are intended to be available in future to be sold as methanol capable or will be intended to be available for retrofit to methanol operation under specific boundary conditions.

Please contact Everllence for further details on the engines marked as methanol ready, the certifying class societies, and the currently expected availability of methanol ready for the individual marked engines.

ECOLOAD advisory system

ECOLOAD is an advisory tool for marine powertrains (diesel-mechanic and diesel-electric) installed on-board the vessel on its own dedicated server hardware. Taking into account the current operating condition of the propulsion plant as well as input values entered by the operator, ECOLOAD calculates the optimum operating condition for the entire powertrain, and displays it via a graphical user interface.

On multi-engine plants, the holistically-optimised operation of the engines becomes very complex. In particular, engines with ECOMAP capability have a huge potential for lowering fuel oil consumption and emissions.




ECOLOAD advisory system providing advice on holistic powertrain operation

Everllence fuel gas supply solutions

Everllence is a world leader in engineering solutions for safe storage of energy on board ships, and reliably providing gas to both engines and fuel cells.

After 20 years of pioneering the market for LNG-fuelled ships, with more than 60 reference projects, Everllence has entered ground-breaking territory, developing unique solutions for storage and regasification of liquid hydrogen. With this milestone, Everllence consolidates its position as your reliable engineering partner for marine applications, as well as breaking new ground with its green power-to-X solutions for onshore applications.

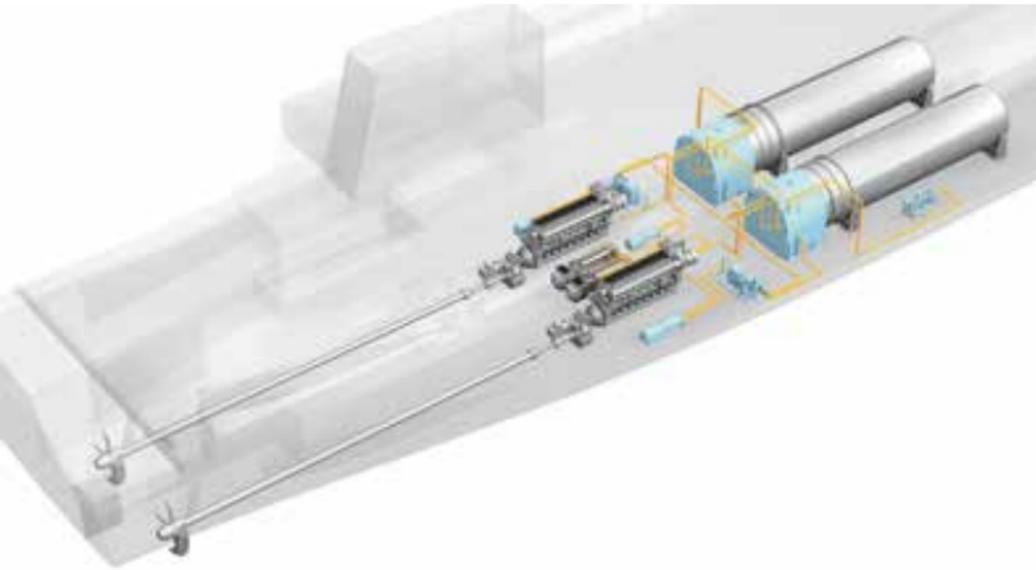

Dual fuel propulsion package including fuel gas storage and supply system

Engine power

Engine brake power is stated in kW.

Ratings are given according to ISO 3046-1.


According to ISO 15550, the power figures in the tables are valid within a range of $\pm 3\%$ up to tropical conditions at sea level, i.e.:

- compressor inlet temperature 45°C
- compressor inlet pressure 1,000 mbar
- seawater temperature 32°C

For all commercial medium speed propulsion engines, the power is defined according to the ICN¹ definition (ISO 3046-1:2002: ISO standard power).

For all navy medium speed propulsion applications, the engine rated power is stated as ICFN (ISO standard Continuous Fuel stop Net power), derived from standard ISO 3046-1:2002. It means the engine is capable to deliver power continuously during a period of time corresponding to the application. The engine is operated at stated speed and reference ambient conditions as stated above, while the fuel amount is limited and the fuel stop power cannot be exceeded. The engine rated power is delivered between the maintenance intervals as defined. The ICFN₁ engine power rating description corresponds to 100% engine power output and cannot be exceeded.

Exemplary load profile type

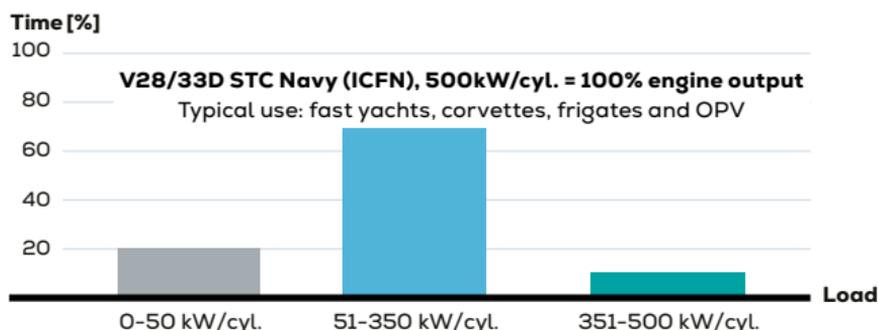

¹ I = Power ISO 3046. C = continuous power output. F = fuel stop power. N = net

Specific fuel oil consumption (SFOC) and specific energy consumption

The stated consumption figures refer to the following reference conditions according to ISO 3046-1:

- ambient air pressure: 1,000 mbar
- ambient air temperature: 25°C (77 °F)
- charge air temperature: according to engine type, corresponding to 25°C cooling water temperature before CAC

The figures are given with a tolerance of +5% and without engine driven pumps. Additional fuel oil consumption must be considered for attached pumps and for engines directly driving dredge pumps.

In accordance with the NO_x Technical Code 2008 of the International Maritime Organization, DM-grade fuel oil is used as reference fuel oil for engine tests and, thus, also forms the basis for the SFOC figures stated for engines in liquid fuel operation.

Unless otherwise specifically stated, SFOC figures are based on a lower calorific value of the fuel oil of 42,700 kJ/kg and, in addition for engines with common rail injection (CR-engines), on DMA-grade fuel oil (ISO 8217). For engines with conventional fuel injection, SFOC figures are based on DMB-grade fuel oil (ISO 8217). For further details, please refer to our engine specific project guides available from Everllence.

Stated SFOC/SGC values are valid for currently applicable rules acc. IMO MARPOL ANNEX VI/NTC 2008, 2023 Edition. They are subject to change regarding draft amendments to be adopted at MEPC 83 (April 2025) with an entry-into-force date as of that of the revised MARPOL Annex VI, which is expected to be adopted in autumn 2025. There will be a transition phase for new and existing engine groups/families between 2027 and 2029, exact dates to be confirmed.

Specific lube oil consumption (SLOC)

The specific lube oil consumption is specified at MCR (maximum continuous rating) with a tolerance of 20%.

Blocking of output

Blocking of output is made for engines driving a propeller at 100% of the rated output. For engines powering an alternator, blocking of output is made at 110%. However, operation above 100% load is only recommended for a short period of time for recovery and prevention of a frequency drop.

Weights and dimensions

For marine main engines, the weights stated refer to engines without a flywheel.

All weights given are without lube oil and cooling water.


For auxiliary engines (GenSets), weights refer to the unit (including alternator). The weight of the GenSet may vary depending on the alternator make.

The length of the GenSet unit depends on the alternator make. For a twin engine installation, the centreline distance is stated for each engine type.

The centreline distance for a twin engine installation is given as a minimum value. Specific requirements to the passageway (e.g. of classification societies or flag state authority), seating type or a gallery can lead to higher values.

Engine type designation

12V28/33D STC

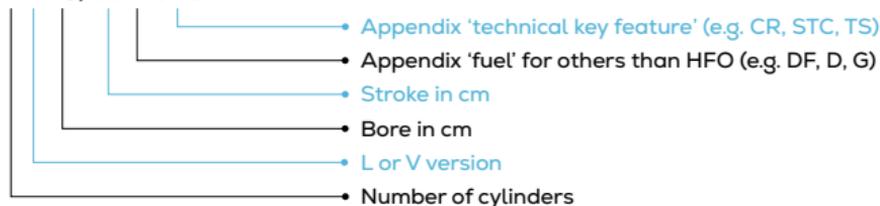


Everllence

Dual-Fuel, Electric+

**Advanced propulsion
for maximum efficiency**

The new Dual-Fuel, Electric+ (DFE+) propulsion concept for LNG carriers brings together the Everllence 49/60DF engine and ABB's Dynamic AC power distribution and control system. This innovative solution enables variable speed operation, significantly reducing methane emissions. By requiring less machinery space, the DFE+ concept increases cargo capacity and enhances overall energy efficiency.

**Learn more on
www.everllence.com**

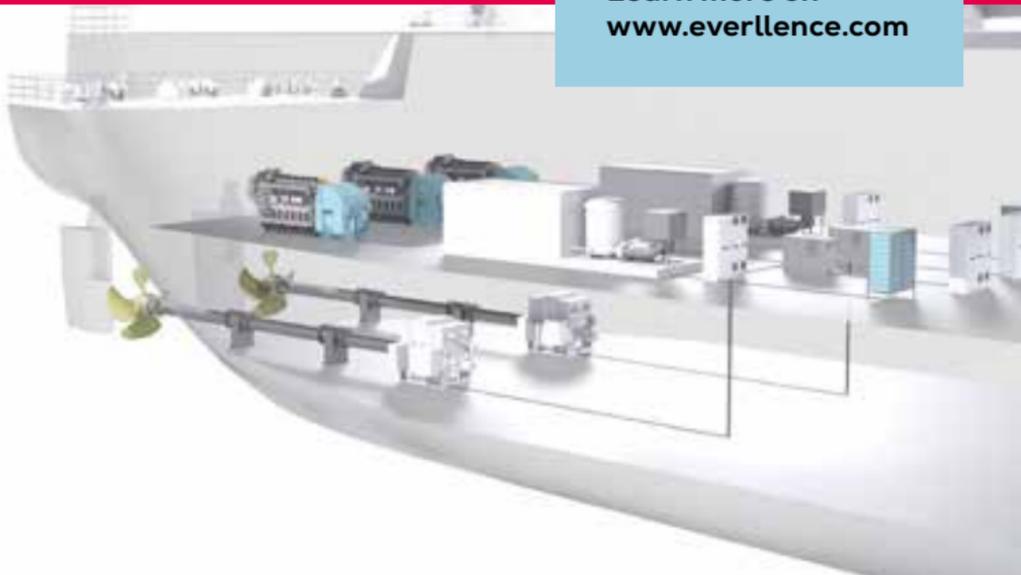


Everllence

four-stroke propulsion engines programme

| r/min | Engine type | | | |
|-------------|--|--|--|------------|
| 500-514 | L51/60DF, V51/60DF | | | |
| 600 | L49/60DF, V49/60DF | | | |
| 600 | L49/60, V49/60 | | | |
| 500-514 | L48/60CR, V48/60CR | | | |
| 720-750 | L35/44DF | | | ██████████ |
| 720-750 | L32/44CR, V32/44CR | | | ██████████ |
| 720-750 | L32/40CD, V32/40CD - NR Turbocharging variant | | | ██████████ |
| 720-750 | L32/40CD, V32/40CD - TCF Turbocharging variant | | | ██████████ |
| 1,000-1,032 | V28/33D STC | | | |
| 750-800 | L27/38, L27/38 (MDO/MGO) | | | ██████████ |
| 750-900 | L27/38 Mk 2 | | | ██████████ |
| 1,000 | L21/31 | | | ██████████ |
| 1,600-2,000 | 175D | | | ██████████ |
| 1,050-1,084 | S.E.M.T. Pielstick PA6B STC | | | |
| 600 | S.E.M.T. Pielstick PC2.6B | | | |

0

We refer to page 164 for a complete overview of engines which can be used for diesel-electric propulsion applications.

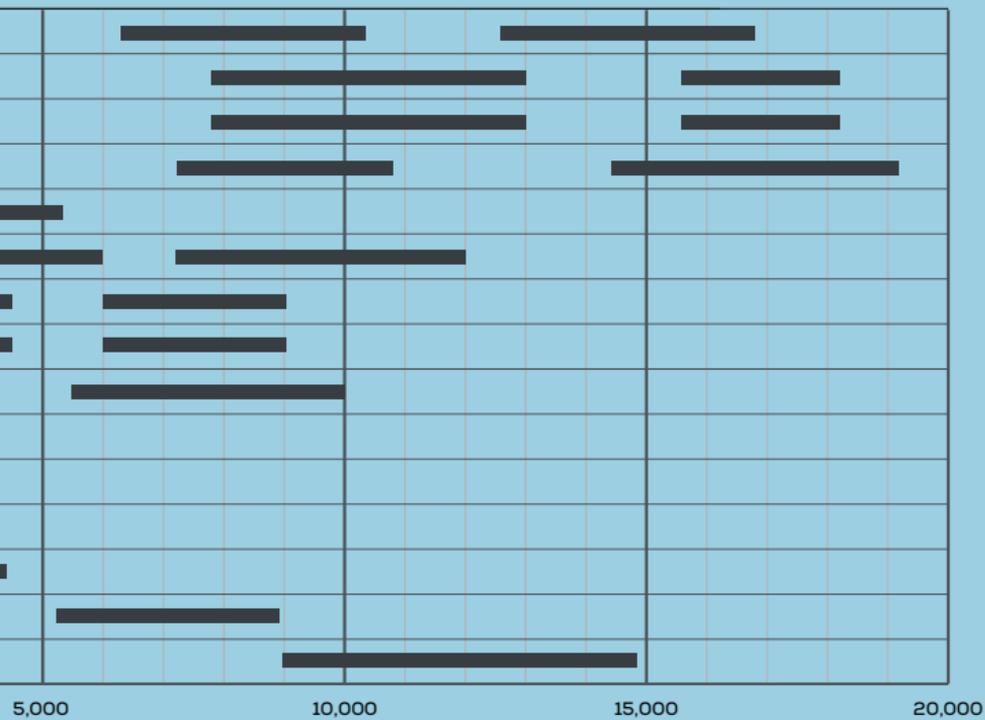

V51/60DF

High efficiency variant

Methanol ready*

Tier II Tier III

Tier III in gas mode

Bore: 510 mm, **Stroke:** 600 mm

| Speed | r/min | 514 | 500 |
|-------------------|-------|--------|--------|
| mep | bar | 20.0 | 20.6 |
| | | kW | kW |
| 12V51/60DF | | 12,600 | 12,600 |
| 14V51/60DF | | 14,700 | 14,700 |
| 16V51/60DF | | 16,800 | 16,800 |

LHV of fuel gas $\geq 28,000$ kJ/Nm³

(Nm³ corresponds to one cubic metre of gas at 0°C and 1.013 bar)

Specific fuel oil consumption (SFOC) and specific energy consumption at ISO conditions

| MCR | 100% | 85% |
|---|--------------|--------------|
| Specific fuel oil consumption¹⁾ | 177.0 g/kWh | 174.5 g/kWh |
| Specific energy consumption²⁾ | 7,150 kJ/kWh | 7,150 kJ/kWh |

Specific lube oil consumption³⁾: 0.38 g/kWh for nominal output 1,050 kW/cyl.

¹⁾ Liquid fuel operation

²⁾ Gas operation (including pilot fuel, cetane no. 55 - 60), gas fuel: methane no. 80


³⁾ Related to 100% actual engine load

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 12 | 14 | 16 |
|----------------------|----|--------|--------|--------|
| L | mm | 10,254 | 11,254 | 12,254 |
| L₁ | mm | 9,088 | 10,088 | 11,088 |
| Dry mass | t | 199 | 228 | 250 |

Minimum centreline distance for twin engine installation: 4,800 mm

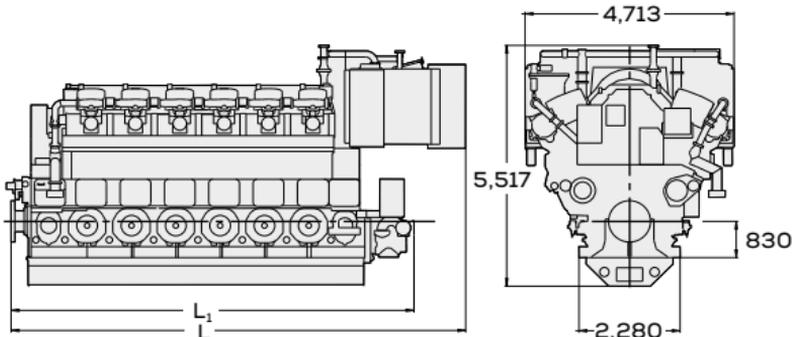

Bore: 510 mm, **Stroke:** 600 mm

| Speed | r/min | 514 | 500 |
|-----------|-------|-------|-------|
| mep | bar | 20.0 | 20.6 |
| | | kW | kW |
| 6L51/60DF | | 6,300 | 6,300 |
| 7L51/60DF | | 7,350 | 7,350 |
| 8L51/60DF | | 8,400 | 8,400 |
| 9L51/60DF | | 9,450 | 9,450 |

LHV of fuel gas $\geq 28,000$ kJ/Nm³

(Nm³ corresponds to one cubic metre of gas at 0°C and 1.013 bar)

Specific fuel oil consumption (SFOC) and specific energy consumption at ISO conditions

| MCR | 100% | 85% |
|---|--------------|--------------|
| Specific fuel oil consumption ¹⁾ | 178.5 g/kWh | 176.0 g/kWh |
| Specific energy consumption ²⁾ | 7,150 kJ/kWh | 7,150 kJ/kWh |

Specific lube oil consumption³⁾: 0.38 g/kWh for nominal output 1,050 kW/cyl.

¹⁾ Liquid fuel operation

²⁾ Gas operation (including pilot fuel, cetane no. 55 - 60), gas fuel: methane no. 80


³⁾ Related to 100% actual engine load

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------|----|-------|-------|--------|--------|
| L | mm | 8,494 | 9,314 | 10,134 | 11,160 |
| L ₁ | mm | 7,455 | 8,275 | 9,095 | 9,915 |
| W | mm | 3,165 | 3,165 | 3,165 | 3,283 |
| Dry mass | t | 110 | 124 | 137 | 155 |

Minimum centreline distance for twin engine installation: 3,200 mm

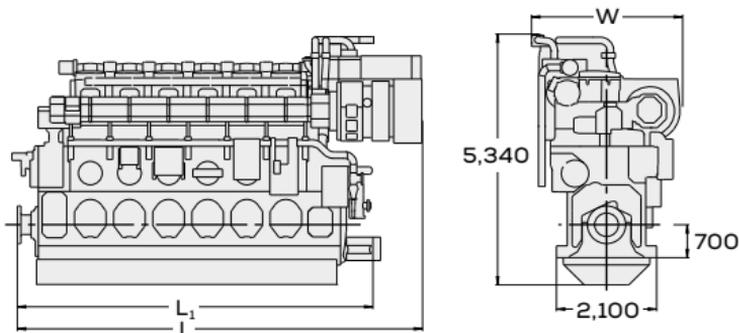

V51/60DF

High power variant

Methanol ready*

Tier II Tier III

Tier III in gas mode

Bore: 510 mm, **Stroke:** 600 mm

| Speed | r/min | 514 | 500 |
|-------------------|-------|--------|--------|
| mep | bar | 21.9 | 22.5 |
| | | kW | kW |
| 12V51/60DF | | 13,800 | 13,800 |
| 14V51/60DF | | 16,100 | 16,100 |

LHV of fuel gas $\geq 28,000$ kJ/Nm³

(Nm³ corresponds to one cubic metre of gas at 0°C and 1.013 bar)

Specific fuel oil consumption (SFOC) and specific energy consumption at ISO conditions

| MCR | 100% | 85% |
|--|--------------|--------------|
| Specific fuel oil consumption¹⁾ | 185.0 g/kWh | 181.0 g/kWh |
| Specific energy consumption²⁾ (12V51/60DF) | 7,350 kJ/kWh | 7,250 kJ/kWh |
| Specific energy consumption²⁾ (14V51/60DF) | 7,350 kJ/kWh | 7,300 kJ/kWh |

Specific lube oil consumption³⁾: 0.35 g/kWh for nominal output 1,150 kW/cyl.

¹⁾ Liquid fuel operation

²⁾ Gas operation (including pilot fuel, cetane no. 55 - 60), gas fuel: methane no. 80


³⁾ Related to 100% actual engine load

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 12 | 14 |
|----------------------|----|--------|--------|
| L | mm | 10,254 | 11,254 |
| L₁ | mm | 9,088 | 10,088 |
| Dry mass | t | 199 | 228 |

Minimum centreline distance for twin engine installation: 4,800 mm

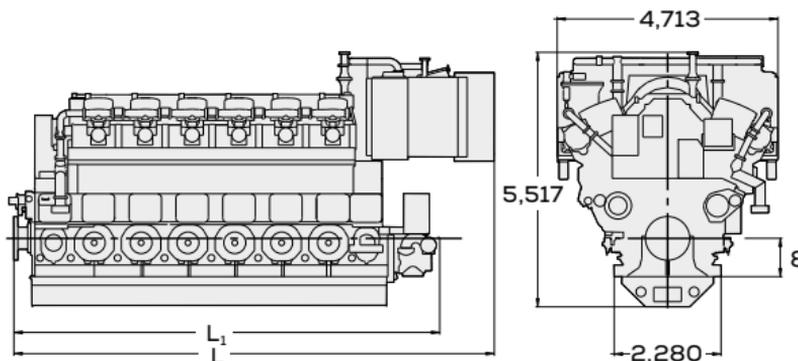

Bore: 510 mm, Stroke: 600 mm

| Speed | r/min | 514 | 500 |
|-----------|-------|--------|--------|
| mep | bar | 21.9 | 22.5 |
| | | kW | kW |
| 6L51/60DF | | 6,900 | 6,900 |
| 7L51/60DF | | 8,050 | 8,050 |
| 8L51/60DF | | 9,200 | 9,200 |
| 9L51/60DF | | 10,350 | 10,350 |

LHV of fuel gas $\geq 28,000$ kJ/Nm³(Nm³ corresponds to one cubic metre of gas at 0°C and 1.013 bar)

Specific fuel oil consumption (SFOC) and specific energy consumption at ISO conditions

| MCR | 100% | 85% |
|---|--------------|--------------|
| Specific fuel oil consumption ¹⁾ | 186.5 g/kWh | 182.5 g/kWh |
| Specific energy consumption ²⁾ | 7,420 kJ/kWh | 7,350 kJ/kWh |


Specific lube oil consumption³⁾: 0.35 g/kWh for nominal output 1,150 kW/cyl.¹⁾ Liquid fuel operation²⁾ Gas operation (including pilot fuel, cetane no. 55 - 60), gas fuel: methane no. 80³⁾ Related to 100% actual engine load

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------|----|-------|-------|--------|--------|
| L | mm | 8,494 | 9,314 | 10,134 | 11,160 |
| L ₁ | mm | 7,455 | 8,275 | 9,095 | 9,915 |
| W | mm | 3,165 | 3,165 | 3,165 | 3,283 |
| Dry mass | t | 110 | 124 | 137 | 155 |

Minimum centreline distance for twin engine installation: 3,200 mm

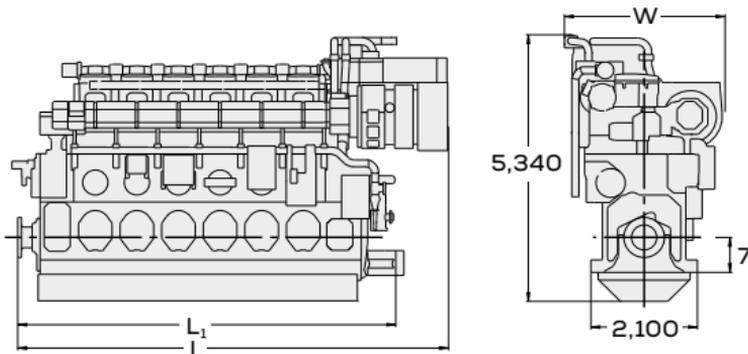

Bore: 490 mm, **Stroke:** 600 mm

| | | |
|-------------------|--------------|------------|
| Speed | r/min | 600 |
| mep | bar | 23 |
| | | kW |
| 12V49/60DF | | 15,600 |
| 14V49/60DF | | 18,200 |

LHV of fuel gas $\geq 28,000$ kJ/Nm³

(Nm³ corresponds to one cubic metre of gas at 0°C and 1.013 bar)

Specific fuel oil consumption (SFOC) and specific energy consumption at ISO conditions

| MCR | 100% | 85% |
|---|--------------|--------------|
| Specific fuel oil consumption¹⁾ | 174.4 g/kWh | 171.0 g/kWh |
| Specific energy consumption²⁾ | 6,985 kJ/kWh | 6,990 kJ/kWh |

Specific lube oil consumption³⁾: 0.38 g/kWh for nominal output 1,300 kW/cyl.

¹⁾ Liquid fuel operation.

²⁾ Gas operation (including pilot fuel, cetane no. 55-60), gas fuel: methane no. 80



³⁾ Related to 100% actual engine load

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 12 | 14 |
|----------------------|-----------|-----------|-----------|
| L | mm | 10,898 | 11,878 |
| L₁ | mm | 9,350 | 10,330 |
| W | mm | 5,019 | 5,019 |
| H | mm | 5,681 | 5,681 |
| Dry mass | t | 217 | 245 |

Minimum centreline distance for twin engine installation: 5,750 mm

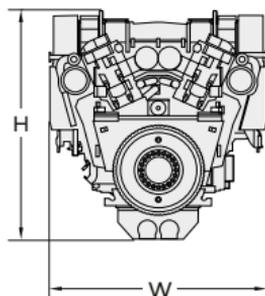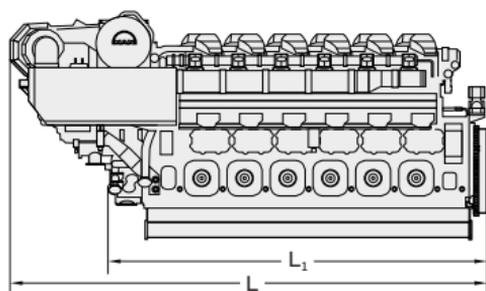

Tier III in gas mode

Bore: 490 mm, **Stroke:** 600 mm

| Speed | r/min | 600 |
|-------------------|-------|--------|
| mep | bar | 23 |
| | | kW |
| 6L49/60DF | | 7,800 |
| 7L49/60DF | | 9,100 |
| 8L49/60DF | | 10,400 |
| 9L49/60DF | | 11,700 |
| 10L49/60DF | | 13,000 |

LHV of fuel gas $\geq 28,000$ kJ/Nm³(Nm³ corresponds to one cubic metre of gas at 0°C and 1.013 bar)

Specific fuel oil consumption (SFOC) and specific energy consumption at ISO conditions

| MCR | 100% | 85% |
|--|--------------|--------------|
| Specific fuel oil consumption ^{1), 4)} | 174.4 g/kWh | 171.0 g/kWh |
| Specific energy consumption ^{2), 4)} | 6,985 kJ/kWh | 6,990 kJ/kWh |



Specific lube oil consumption³⁾: 0.38 g/kWh for nominal output 1,300 kW/cyl.¹⁾ Liquid fuel operation.²⁾ Gas operation (including pilot fuel, cetane no. 55-60), gas fuel: methane no. 80³⁾ Related to 100% actual engine load⁴⁾ Higher values for 8L

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 | 10 |
|----------------------|----|-------|-------|--------|--------|--------|
| L | mm | 8,518 | 9,338 | 10,399 | 11,219 | 12,039 |
| L₁ | mm | 7,238 | 8,058 | 8,878 | 9,698 | 10,518 |
| W | mm | 3,134 | 3,134 | 3,134 | 3,154 | 3,154 |
| H | mm | 5,426 | 5,426 | 5,426 | 5,582 | 5,582 |
| Dry mass | t | 130 | 145 | 165 | 180 | 195 |

Minimum centreline distance for twin engine installation: 3,700 mm

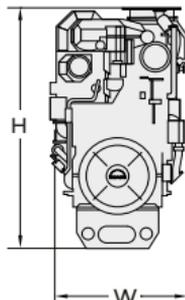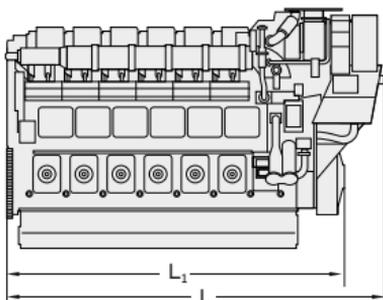

Bore: 490 mm, **Stroke:** 600 mm

| Speed | r/min | 600 |
|----------|-------|--------|
| mep | bar | 23 |
| | | kW |
| 12V49/60 | | 15,600 |
| 14V49/60 | | 18,200 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|-------------------------------|-------------|-------------|
| Specific fuel oil consumption | 174.4 g/kWh | 171.0 g/kWh |

Specific lube oil consumption¹⁾: 0.38 g/kWh for nominal output 1,300 kW/cyl.



¹⁾ Related to 100% actual engine load

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 12 | 14 |
|----------------|----|--------|--------|
| L | mm | 10,898 | 11,878 |
| L ₁ | mm | 9,350 | 10,330 |
| W | mm | 5,019 | 5,019 |
| H | mm | 5,681 | 5,681 |
| Dry mass | t | 217 | 245 |

Minimum centreline distance for twin engine installation: 5,750 mm

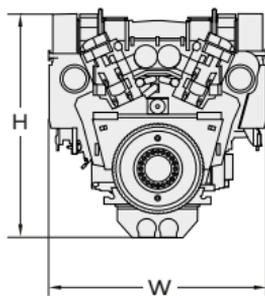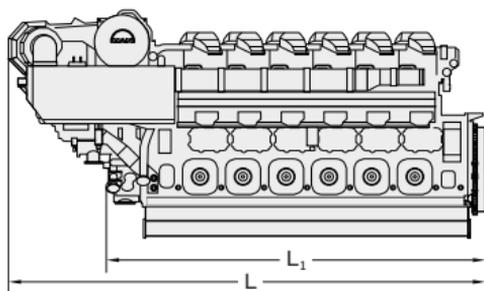

Tier III with SCR

Bore: 490 mm, **Stroke:** 600 mm

| Speed | r/min | 600 |
|-----------------|--------------|------------|
| mep | bar | 23 |
| | | kW |
| 6L49/60 | | 7,800 |
| 7L49/60 | | 9,100 |
| 8L49/60 | | 10,400 |
| 9L49/60 | | 11,700 |
| 10L49/60 | | 13,000 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|---|-------------|-------------|
| Specific fuel oil consumption¹⁾ | 174.4 g/kWh | 171.0 g/kWh |

Specific lube oil consumption²⁾: 0.38 g/kWh for nominal output 1,300 kW/cyl.

¹⁾ Higher values for 8L



²⁾ Related to 100% actual engine load

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 | 10 |
|----------------------|-----------|----------|----------|----------|----------|-----------|
| L | mm | 8,518 | 9,338 | 10,399 | 11,219 | 12,039 |
| L₁ | mm | 7,238 | 8,058 | 8,878 | 9,698 | 10,518 |
| W | mm | 3,134 | 3,134 | 3,134 | 3,154 | 3,154 |
| H | mm | 5,426 | 5,426 | 5,426 | 5,582 | 5,582 |
| Dry mass | t | 130 | 145 | 165 | 180 | 195 |

Minimum centreline distance for twin engine installation: 3,700 mm

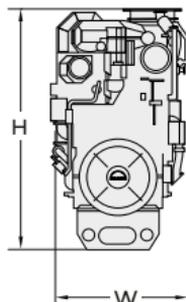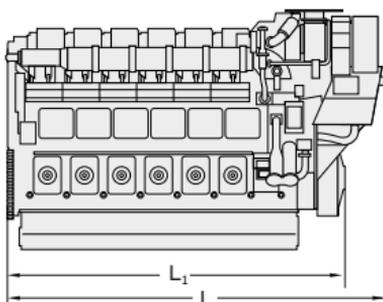

Bore: 480 mm, **Stroke:** 600 mm

| Speed | r/min | 514 | 500 |
|-------------------|-------|--------|--------|
| mep | bar | 25.8 | 26.5 |
| | | kW | kW |
| 12V48/60CR | | 14,400 | 14,400 |
| 14V48/60CR | | 16,800 | 16,800 |
| 16V48/60CR | | 19,200 | 19,200 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|-----------------|-------------|-------------|
| V48/60CR | 182.0 g/kWh | 173.5 g/kWh |

Specific lube oil consumption¹⁾: 0.5 g/kWh for nominal output 1,200 kW/cyl.


¹⁾ Related to 100% actual engine load

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 12 | 14 | 16 |
|----------------------|----|--------|--------|--------|
| L | mm | 10,790 | 11,790 | 13,140 |
| L₁ | mm | 9,088 | 10,088 | 11,088 |
| Dry mass | t | 189 | 213 | 240 |

Minimum centreline distance for twin engine installation: 4,800 mm

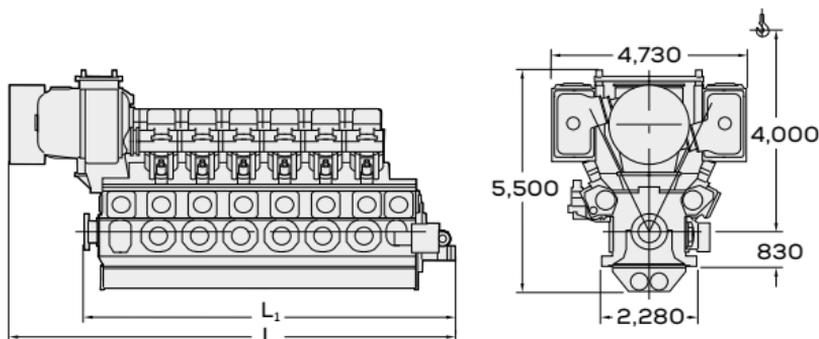

Tier III with SCR

Bore: 480 mm, **Stroke:** 600 mm

| Speed | r/min | 514 | 500 |
|------------------|--------------|-------------|-------------|
| mep | bar | 25.8 | 26.5 |
| | | kW | kW |
| 6L48/60CR | | 7,200 | 7,200 |
| 7L48/60CR | | 8,400 | 8,400 |
| 8L48/60CR | | 9,600 | 9,600 |
| 9L48/60CR | | 10,800 | 10,800 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|-----------------|-------------|-------------|
| L48/60CR | 184.0 g/kWh | 175.5 g/kWh |


Specific lube oil consumption¹⁾: 0.5 g/kWh for nominal output 1,200 kW/cyl.¹⁾ Related to 100% actual engine load

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------------|-----------|----------|----------|----------|----------|
| L | mm | 8,760 | 9,580 | 10,540 | 11,360 |
| L₁ | mm | 7,455 | 8,275 | 9,095 | 9,915 |
| W | mm | 3,165 | 3,165 | 3,280 | 3,280 |
| Dry mass | t | 106 | 119 | 135 | 148 |


Minimum centreline distance for twin engine installation: 3,200 mm

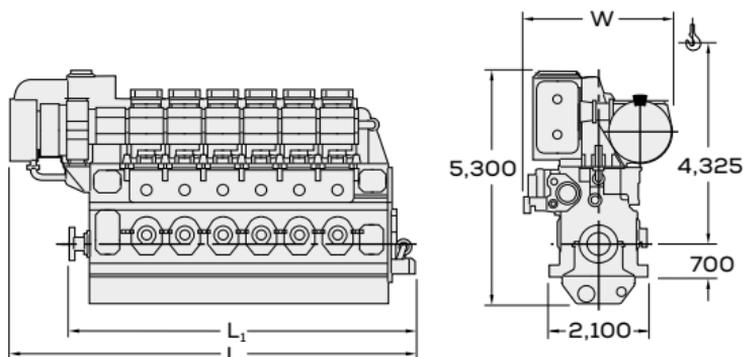

Everllence

Set your course to net zero with

methanol

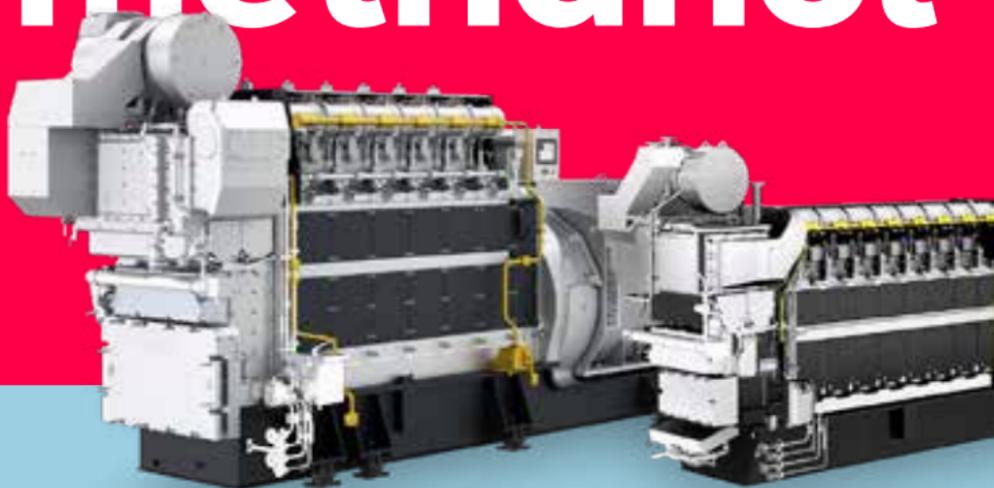

Reduce your carbon footprint with methanol GenSets

The L21/31DF-M was the first small-bore dual-fuel methanol GenSet in our portfolio. And the L27/38DF-M is the next milestone and addition to our small-bore engine portfolio. Both engine types can either be used as GenSet or for diesel-electric propulsion.

The foundations of these engines are the trusted and proven L21/31 and L27/38 GenSets, which have jointly accumulated millions of operating hours, with thousands of engines in service.

Tier III in gas mode

Bore: 350 mm, Stroke: 440 mm

| Speed | r/min | 750 | 720 |
|------------|-------|-------|-------|
| mep | bar | 20.0 | 20.1 |
| | | kW | kW |
| 6L35/44DF | | 3,180 | 3,060 |
| 7L35/44DF | | 3,710 | 3,570 |
| 8L35/44DF | | 4,240 | 4,080 |
| 9L35/44DF | | 4,770 | 4,590 |
| 10L35/44DF | | 5,300 | 5,100 |

LHV of fuel gas $\geq 28,000$ kJ/Nm³(Nm³ corresponds to one cubic metre of gas at 0°C and 1.013 bar)

Specific fuel oil consumption (SFOC) and specific energy consumption at ISO conditions

| MCR | 100% | 85% |
|---|--------------|--------------|
| Specific fuel oil consumption ¹⁾ | 177.0 g/kWh | 174.0 g/kWh |
| Specific energy consumption ²⁾ | 7,410 kJ/kWh | 7,440 kJ/kWh |

Specific lube oil consumption³⁾: 0.5 g/kWh for nominal output 530 kW/cyl. or 0.52 g/kWh for nominal output 510 kW/cyl.

¹⁾ Liquid fuel operation²⁾ Gas operation (including pilot fuel, cetane no. 55 - 60), gas fuel: methane no. 80³⁾ Related to 100% actual engine load


Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 | 10 |
|------------------------|----|-------|-------|-------|-------|-------|
| L | mm | 6,485 | 7,015 | 7,545 | 8,075 | 8,605 |
| L ₁ | mm | 5,265 | 5,877 | 6,407 | 6,937 | 7,556 |
| W | mm | 2,539 | 2,678 | 2,678 | 2,678 | 2,678 |
| H | mm | 4,163 | 4,369 | 4,369 | 4,369 | 4,369 |
| Dry mass ⁴⁾ | t | 44.0 | 48.0 | 53.0 | 58.0 | 62.5 |

Minimum centreline distance for twin engine installation: 2,500 mm

⁴⁾ Including built-on lube oil automatic filter, fuel oil filter and electronic equipment

Speed 720 r/min for generator drive only

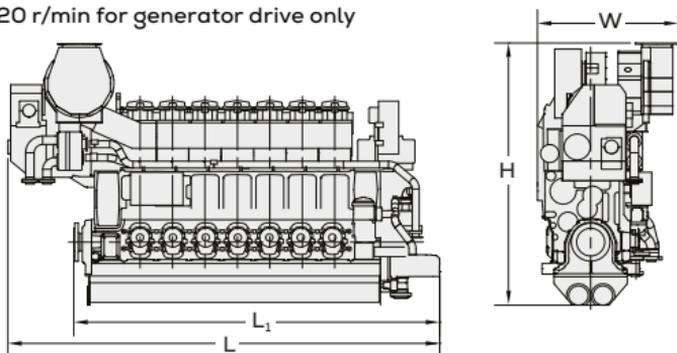

Bore: 320 mm, Stroke: 440 mm

| Speed | r/min | 750 | 720 |
|--------------------------|-------|--------|--------|
| mep | bar | 27.1 | 28.3 |
| | | kW | kW |
| 12V32/44CR | | 7,200 | 7,200 |
| 14V32/44CR ¹⁾ | | 8,120 | 8,120 |
| 16V32/44CR | | 9,600 | 9,600 |
| 18V32/44CR ²⁾ | | 10,800 | 10,800 |
| 20V32/44CR | | 12,000 | 12,000 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|----------------|-------------|-------------|
| V32/44CR | 175.5 g/kWh | 171.0 g/kWh |
| 14V32/44CR | 176.0 g/kWh | 171.5 g/kWh |
| V32/44CR FPP | 176.5 g/kWh | 172.5 g/kWh |
| 14V32/44CR FPP | 177.5 g/kWh | 174.0 g/kWh |

Specific lube oil consumption³⁾: 0.5 g/kWh for nominal output 600 kW/cyl., 0.52 g/kWh for nominal output 580 kW/cyl., 0.55 g/kWh for nominal output 550 kW/cyl.

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 12 | 14 | 16 | 18 | 20 |
|------------------------|----|-------|-------|-------|-------|-------|
| L | mm | 7,195 | 7,970 | 8,600 | 9,230 | 9,860 |
| L ₁ | mm | 5,795 | 6,425 | 7,055 | 7,685 | 8,315 |
| W | mm | 3,100 | 3,100 | 3,100 | 3,100 | 3,100 |
| H | mm | 4,039 | 4,262 | 4,262 | 4,262 | 4,262 |
| Dry mass ⁴⁾ | t | 70 | 82 | 89 | 100 | 106 |


Minimum centreline distance for twin engine installation: 4,000 mm

Speed 720 r/min for generator drive/constant speed operation only

¹⁾ 580 kW/cyl.²⁾ 18V32/44CR available rigidly mounted only³⁾ Related to 100% actual engine load⁴⁾ Including built-on lube oil automatic filter, fuel oil filter and electronic equipment

Fixed pitch propeller: 550 kW/cyl., 750 r/min

Wet oil sump available upon request

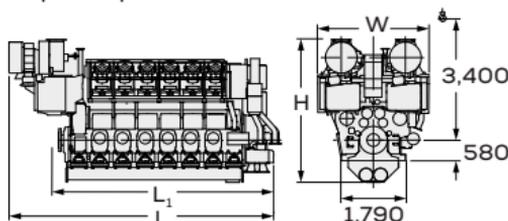

Tier III with SCR

Bore: 320 mm, **Stroke:** 440 mm

| Speed | r/min | 750 | 720 |
|-------------------------|-------|-------|-------|
| mep | bar | 27.1 | 28.3 |
| | | kW | kW |
| 6L32/44CR | | 3,600 | 3,600 |
| 7L32/44CR ¹⁾ | | 4,060 | 4,060 |
| 8L32/44CR | | 4,800 | 4,800 |
| 9L32/44CR | | 5,400 | 5,400 |
| 10L32/44CR | | 6,000 | 6,000 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|---------------|-------------|-------------|
| L32/44CR | 176.0 g/kWh | 172.0 g/kWh |
| 7L32/44CR | 176.5 g/kWh | 172.5 g/kWh |
| L32/44CR FPP | 176.5 g/kWh | 172.5 g/kWh |
| 7L32/44CR FPP | 177.5 g/kWh | 174.0 g/kWh |

Specific lube oil consumption²⁾: 0.5 g/kWh for nominal output 600 kW/cyl., 0.52 g/kWh for nominal output 580 kW/cyl., 0.55 g/kWh for nominal output 550 kW/cyl.

* Refer to page 105 for further information

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 | 10 |
|------------------------|----|-------|-------|-------|-------|-------|
| L | mm | 6,312 | 6,924 | 7,454 | 7,984 | 8,603 |
| L ₁ | mm | 5,265 | 5,877 | 6,407 | 6,937 | 7,556 |
| W | mm | 2,174 | 2,359 | 2,359 | 2,359 | 2,359 |
| H | mm | 4,163 | 4,369 | 4,369 | 4,369 | 4,369 |
| Dry mass ³⁾ | t | 42.5 | 48.5 | 53.5 | 58.0 | 63.5 |

Minimum centreline distance for twin engine installation: 2,500 mm

Speed 720 r/min for generator drive/constant speed operation only


¹⁾ 580 kW/cyl.

²⁾ Related to 100% actual engine load

³⁾ Including built-on lube oil automatic filter, fuel oil filter and electronic equipment

Fixed pitch propeller: 550 kW/cyl., 750 r/min

Wet oil sump available upon request

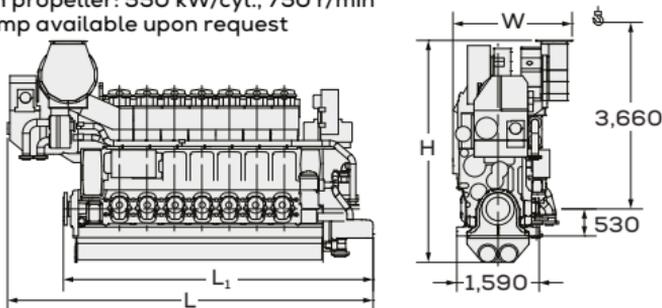

V32/40CD

NR Turbocharging variant

Tier II Tier III

Tier III with SCR

Bore: 320 mm, **Stroke:** 400 mm

| Speed | r/min | 750 | 720 |
|------------|-------|-------|-------|
| mep | bar | 24.9 | 25.9 |
| | | kW | kW |
| 12V32/40CD | | 6,000 | 6,000 |
| 14V32/40CD | | 7,000 | 7,000 |
| 16V32/40CD | | 8,000 | 8,000 |
| 18V32/40CD | | 9,000 | 9,000 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|------------|-----------|-----------|
| V32/40 | 184 g/kWh | 182 g/kWh |
| V32/40 FPP | 187 g/kWh | 183 g/kWh |

Specific lube oil consumption¹⁾: 0.5 g/kWh for nominal output 500 kW/cyl., 0.56 g/kWh for nominal output 450 kW/cyl.

Dimensions

| Cyl. No. | | 12 | 14 | 16 | 18 |
|----------------|----|-------|-------|-------|-------|
| L | mm | 6,915 | 7,545 | 8,365 | 8,995 |
| L ₁ | mm | 5,890 | 6,520 | 7,150 | 7,780 |
| W | mm | 3,140 | 3,140 | 3,730 | 3,730 |
| H | mm | 4,100 | 4,100 | 4,420 | 4,420 |
| Dry mass | t | 61 | 68 | 77 | 85 |


Minimum centreline distance for twin engine installation: 4,000 mm

Speed 720 r/min for generator drive/constant speed operation only

Fixed pitch propeller: 450 kW/cyl., 750 r/min

V32/40 as marine main engine to be applied for multi-engine plants only

¹⁾ Related to 100% actual engine load

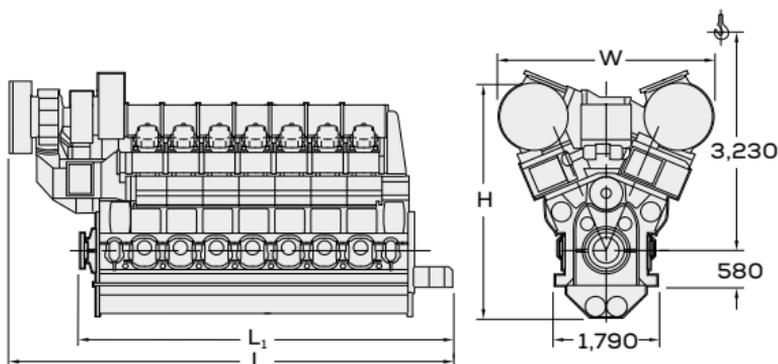

Bore: 320 mm, Stroke: 400 mm

| Speed | r/min | 750 | 720 |
|-----------|-------|-------|-------|
| mep | bar | 24.9 | 25.9 |
| | | kW | kW |
| 6L32/40CD | | 3,000 | 3,000 |
| 7L32/40CD | | 3,500 | 3,500 |
| 8L32/40CD | | 4,000 | 4,000 |
| 9L32/40CD | | 4,500 | 4,500 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|------------|-----------|-----------|
| L32/40 | 186 g/kWh | 183 g/kWh |
| L32/40 FPP | 189 g/kWh | 184 g/kWh |

Specific lube oil consumption¹⁾: 0.5 g/kWh for nominal output 500 kW/cyl., 0.56 g/kWh for nominal output 450 kW/cyl.


Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------|----|-------|-------|-------|-------|
| L | mm | 5,940 | 6,470 | 7,000 | 7,530 |
| L ₁ | mm | 5,140 | 5,670 | 6,195 | 6,725 |
| W | mm | 2,630 | 2,630 | 2,715 | 2,715 |
| H | mm | 4,010 | 4,010 | 4,490 | 4,490 |
| Dry mass | t | 38 | 42 | 47 | 51 |

Minimum centreline distance for twin engine installation: 2,500 mm. Please contact Everllence for the precise information about the centreline distance for two engines with the same cylinder number standing near each other. Speed 720 r/min for generator drive/constant speed operation only.

Fixed pitch propeller: 450 kW/cyl., 750 r/min

¹⁾ Related to 100% actual engine load

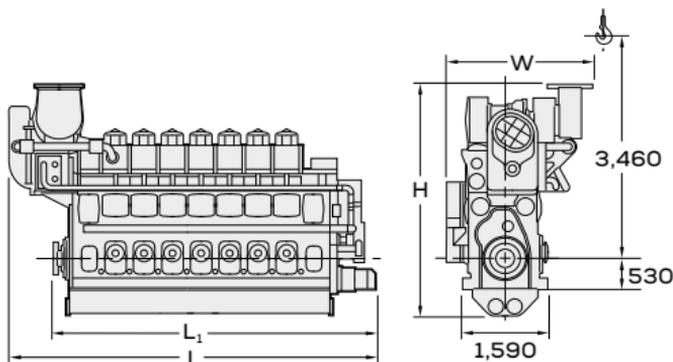

V32/40CD

TCF Turbocharging variant*

Tier II Tier III

Tier III with SCR

Bore: 320 mm, **Stroke:** 400 mm

| Speed | r/min | 750 | 720 |
|------------|-------|-------|-------|
| mep | bar | 24.9 | 25.9 |
| | | kW | kW |
| 12V32/40CD | | 6,000 | 6,000 |
| 14V32/40CD | | 7,000 | 7,000 |
| 16V32/40CD | | 8,000 | 8,000 |
| 18V32/40CD | | 9,000 | 9,000 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|------------|-------------|-------------|
| V32/40 | 189.0 g/kWh | 185.0 g/kWh |
| V32/40 FPP | 190.0 g/kWh | 185.5 g/kWh |

Specific lube oil consumption¹⁾: 0.5 g/kWh for nominal output 500 kW/cyl., 0.56 g/kWh for nominal output 450 kW/cyl.

Dimensions

| Cyl. No. | | 12 | 14 | 16 | 18 |
|----------------|----|-------|-------|-------|-------|
| L | mm | 6,974 | 7,604 | 8,228 | 8,858 |
| L ₁ | mm | 5,890 | 6,520 | 7,150 | 7,780 |
| W | mm | 3,255 | 3,255 | 3,255 | 3,255 |
| H | mm | 4,181 | 4,181 | 4,181 | 4,181 |
| Dry mass | t | 62 | 69 | 76 | 84 |

Minimum centreline distance for twin engine installation: 4,000 mm


Speed 720 r/min for generator drive/constant speed operation only

Fixed pitch propeller: 450 kW/cyl., 750 r/min

V32/40 as marine main engine to be applied for multi-engine plants only

¹⁾ Related to 100% actual engine load

* Release in October 2025, compliant with upcoming IMO rules 2027

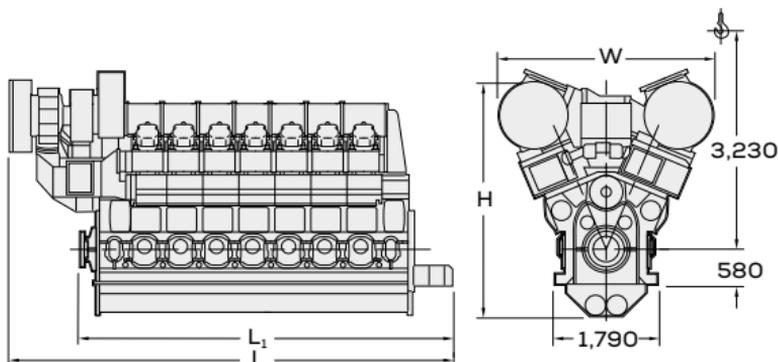

Bore: 320 mm, Stroke: 400 mm

| Speed | r/min | 750 | 720 |
|-----------|-------|-------|-------|
| mep | bar | 24.9 | 25.9 |
| | | kW | kW |
| 6L32/40CD | | 3,000 | 3,000 |
| 7L32/40CD | | 3,500 | 3,500 |
| 8L32/40CD | | 4,000 | 4,000 |
| 9L32/40CD | | 4,500 | 4,500 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|------------|-------------|-------------|
| L32/40 | 191.0 g/kWh | 187.0 g/kWh |
| L32/40 FPP | 192.0 g/kWh | 187.5 g/kWh |

Specific lube oil consumption¹⁾: 0.5 g/kWh for nominal output 500 kW/cyl., 0.56 g/kWh for nominal output 450 kW/cyl.

Dimensions


| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------|----|-------|-------|-------|-------|
| L | mm | 5,940 | 6,470 | 7,000 | 7,530 |
| L ₁ | mm | 5,140 | 5,670 | 6,195 | 6,725 |
| W | mm | 2,630 | 2,630 | 2,630 | 2,630 |
| H | mm | 4,010 | 4,010 | 4,010 | 4,010 |
| Dry mass | t | 38.5 | 42.5 | 47 | 51 |

Minimum centreline distance for twin engine installation: 2,500 mm. Please contact Everllence for the precise information about the centreline distance for two engines with the same cylinder number standing near each other. Speed 720 r/min for generator drive/constant speed operation only.

Fixed pitch propeller: 450 kW/cyl., 750 r/min

¹⁾ Related to 100% actual engine load

* Release in October 2025, compliant with upcoming IMO rules 2027

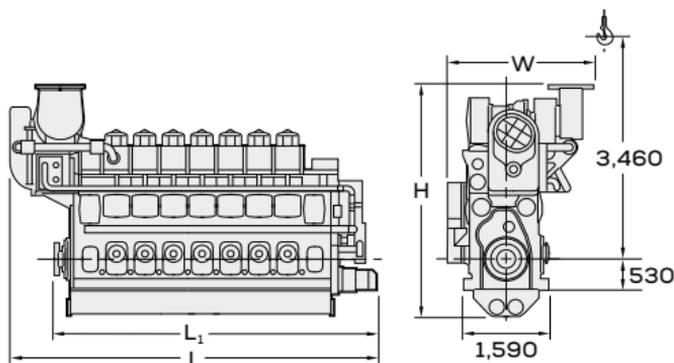

Bore: 280 mm, **Stroke:** 330 mm

| | | Standard engine | Load profile 'Navy' |
|----------------------|--------------|-----------------|---------------------|
| Speed | r/min | 1,000 | 1,032 |
| mep | bar | 26.9 | 28.6 |
| 12V28/33D STC | | 5,460 | 6,000 |
| 16V28/33D STC | | 7,280 | 8,000 |
| 20V28/33D STC | | 9,100 | 10,000 |

Specific fuel oil consumption (SFOC) at ISO conditions

| Output | | 100% | 85% | 100% | 85% |
|----------------------|--------------|-------|-------|-------|-------|
| 12V28/33D STC | g/kWh | 189.0 | 186.0 | 194.0 | 188.5 |
| 16V28/33D STC | g/kWh | 188.0 | 183.5 | 192.0 | 186.5 |
| 20V28/33D STC | g/kWh | 188.0 | 183.5 | 192.0 | 186.5 |

Specific lube oil consumption¹⁾: 0.4 g/kWh for nominal output 455 kW/cyl., 0.36 g/kWh for nominal output 500 kW/cyl.

Figures on theoretical propeller curve for distillates according to ISO 8217 DMA, with attached high temperature (HT) and low temperature (LT) cooling water pumps, lube oil pump, seawater pump and fuel pump

Dimensions

| Cyl. No. | | 12 | 16 | 20 |
|------------------------------|-----------|-------|-------|-------|
| L | mm | 6,207 | 7,127 | 8,047 |
| H²⁾ | mm | 3,417 | 3,417 | 3,417 |
| H³⁾ | mm | 3,682 | 3,682 | 3,682 |
| Dry mass⁴⁾ | t | 35.6 | 43.0 | 50.6 |

¹⁾ Related to 100% actual engine load


²⁾ With low oil sump

³⁾ With deep oil sump


⁴⁾ Tolerance: 5%

Weight and performance parameters refer to engine with flywheel, TC silencer, attached pumps, oil filters and lube oil cooler.

V28/33D STC as marine main engine to be applied for multi-engine plants only in class-approved vessels.

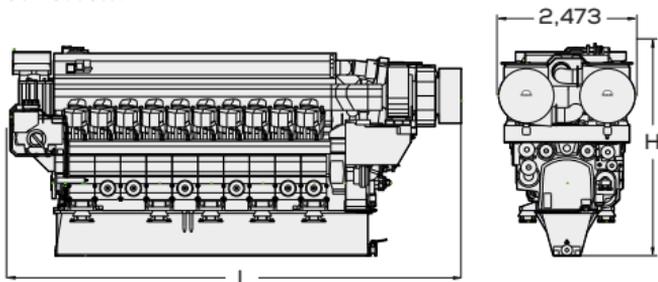

Propeller reliability package

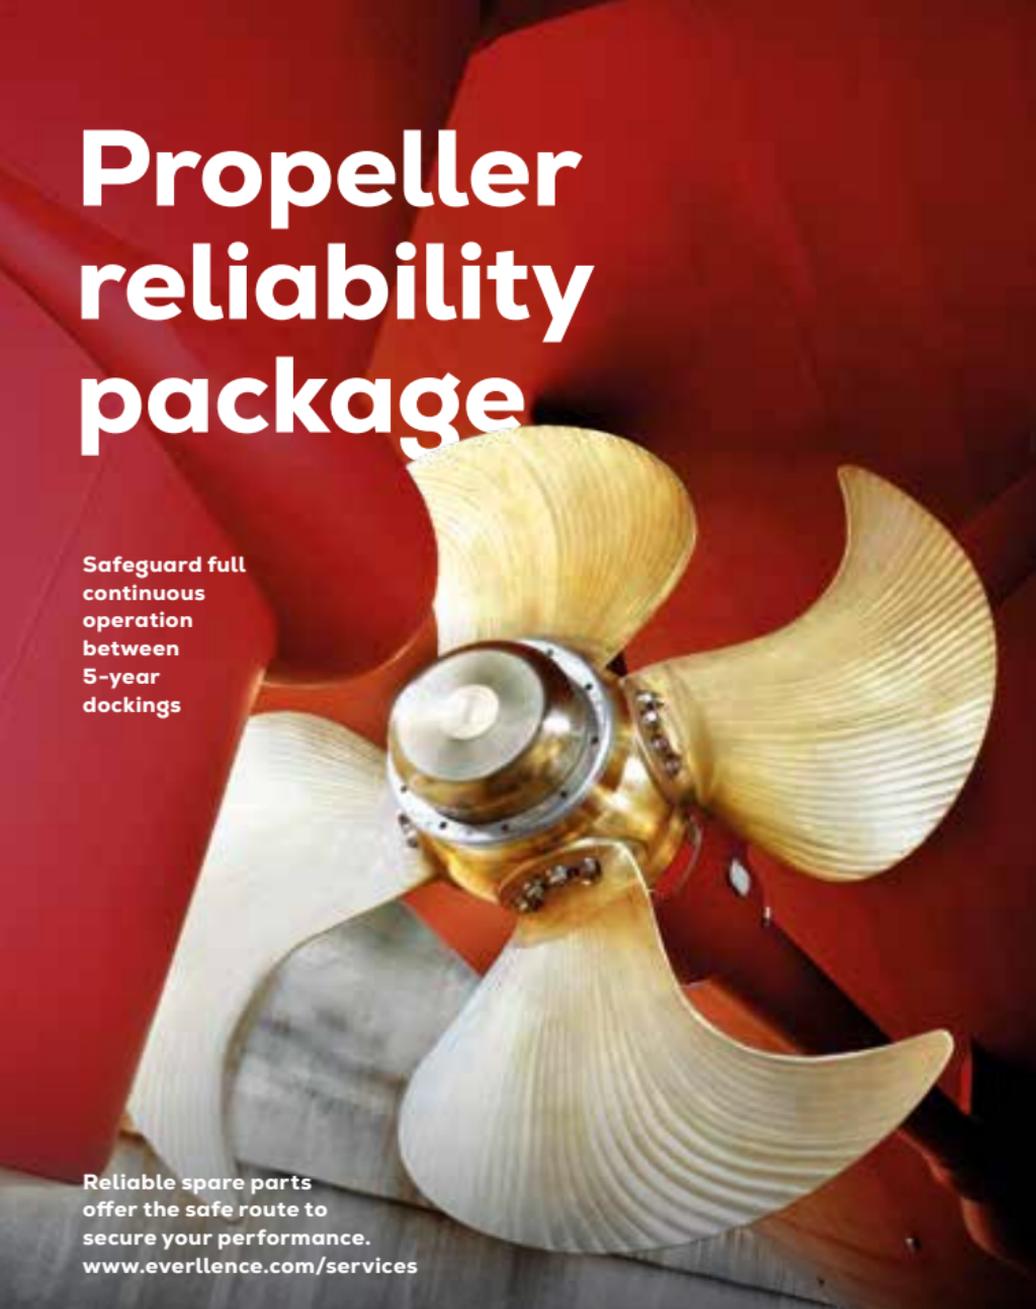

Safeguard full
continuous
operation
between
5-year
dockings

Reliable spare parts
offer the safe route to
secure your performance.
www.everllence.com/services

Everllence

PrimeServ

Bore: 270 mm, Stroke: 380 mm

| Speed | r/min | 750 | 800 | 800 (MDO ¹⁾ /MGO) |
|---------|-------|-------|-------|------------------------------|
| mep | bar | 25.7 | 23.5 | 25.2 |
| | | kW | kW | kW |
| 6L27/38 | | 2,100 | 2,040 | 2,190 |
| 7L27/38 | | 2,450 | 2,380 | 2,555 |
| 8L27/38 | | 2,800 | 2,720 | 2,920 |
| 9L27/38 | | 3,150 | 3,060 | 3,285 |

Specific fuel oil consumption (SFOC) at ISO conditions


| MCR | 100% | | | 85% | | |
|------------|-----------|-----------|-----------|-----------|-----------|-----------|
| | 340 kW | 350 kW | 365 kW | 340 kW | 350 kW | 365 kW |
| L27/38 CPP | 188 g/kWh | 189 g/kWh | 191 g/kWh | 185 g/kWh | 186 g/kWh | 186 g/kWh |
| L27/38 FPP | 187 g/kWh | - | 191 g/kWh | 181 g/kWh | - | 185 g/kWh |

Specific lube oil consumption 0.8 g/kWh

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------|----|-------|-------|-------|-------|
| L | mm | 5,070 | 5,515 | 5,960 | 6,405 |
| L ₁ | mm | 3,962 | 4,407 | 4,852 | 5,263 |
| H | mm | 3,555 | 3,687 | 3,687 | 3,687 |
| Dry mass | t | 29.0 | 32.5 | 36.0 | 39.5 |

Minimum centreline distance for twin engine installation: 2,500 mm

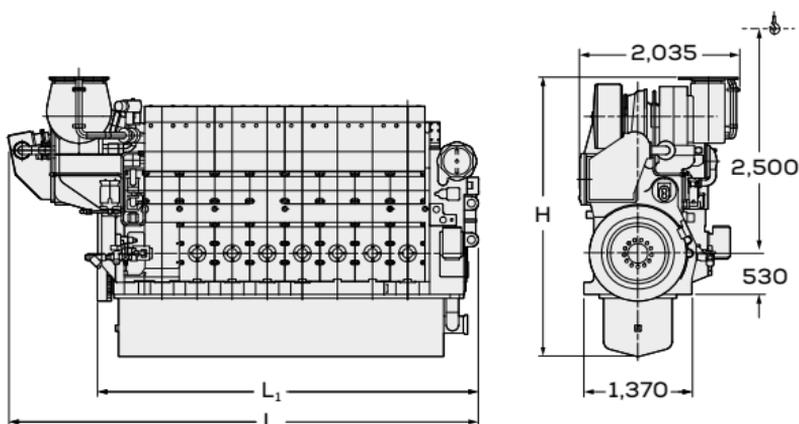¹⁾ MDO viscosity must not exceed 6 mm²/s = cSt at 40°C.

Tier III with SCR

Bore: 270 mm, Stroke: 380 mm

| Speed | r/min | 750 | 900 |
|---------------------|-------|-------|-------|
| mep | bar | 25.7 | 25.1 |
| | | kW | kW |
| 6L27/38 Mk 2 | | 2,100 | 2,460 |
| 7L27/38 Mk 2 | | 2,450 | 2,870 |
| 8L27/38 Mk 2 | | 2,800 | 3,280 |
| 9L27/38 Mk 2 | | 3,150 | 3,690 |

Specific fuel oil consumption (SFOC) at ISO conditions


| MCR | 100% | | 85% | |
|-------------------|-----------|-----------|-----------|-----------|
| | 350 kW | 410 kW | 350 kW | 410 kW |
| L27/38 CPP | 189 g/kWh | 191 g/kWh | 186 g/kWh | 186 g/kWh |
| L27/38 FPP | - | 191 g/kWh | - | 185 g/kWh |

Specific lube oil consumption 0.8 g/kWh

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------------|----|-------|-------|-------|-------|
| L | mm | 5,210 | 5,655 | 6,100 | 6,545 |
| L₁ | mm | 4,127 | 4,572 | 5,017 | 5,462 |
| H | mm | 3,455 | 3,587 | 3,587 | 3,587 |
| Dry mass | t | 30.5 | 33.7 | 36.6 | 40 |

Minimum centreline distance for twin engine installation: 2,500 mm

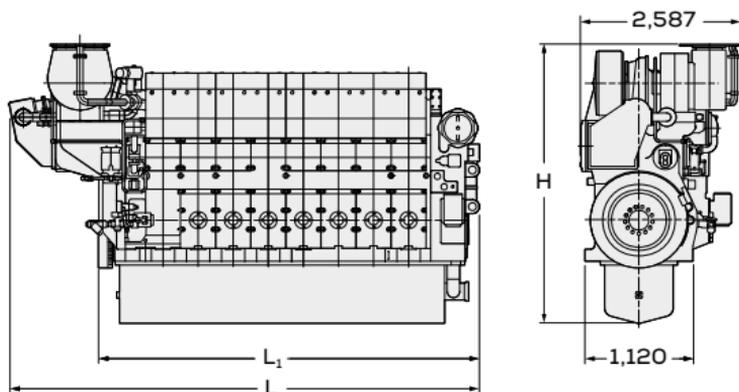

Bore: 210 mm, **Stroke:** 310 mm

| Speed | r/min | 1,000 |
|----------------|--------------|--------------|
| mep | bar | 24.0 |
| | | kW |
| 6L21/31 | | 1,290 |
| 7L21/31 | | 1,505 |
| 8L21/31 | | 1,720 |
| 9L21/31 | | 1,935 |

Specific fuel oil consumption (SFOC) at ISO conditions


| | | |
|-------------------|-------------|------------|
| MCR | 100% | 85% |
| L21/31 CPP | 192 g/kWh | 190 g/kWh |
| L21/31 FPP | 192 g/kWh | 190 g/kWh |

Specific lube oil consumption 0.4-0.8 g/kWh

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------------|-----------|----------|----------|----------|----------|
| L | mm | 4,544 | 4,899 | 5,254 | 5,609 |
| L₁ | mm | 3,284 | 3,639 | 3,994 | 4,349 |
| H | mm | 3,113 | 3,267 | 3,267 | 3,267 |
| W | mm | 1,695 | 1,695 | 1,820 | 1,820 |
| Dry mass | t | 16.0 | 17.5 | 19.0 | 20.5 |

Minimum centreline distance for twin engine installation: 2,400 mm

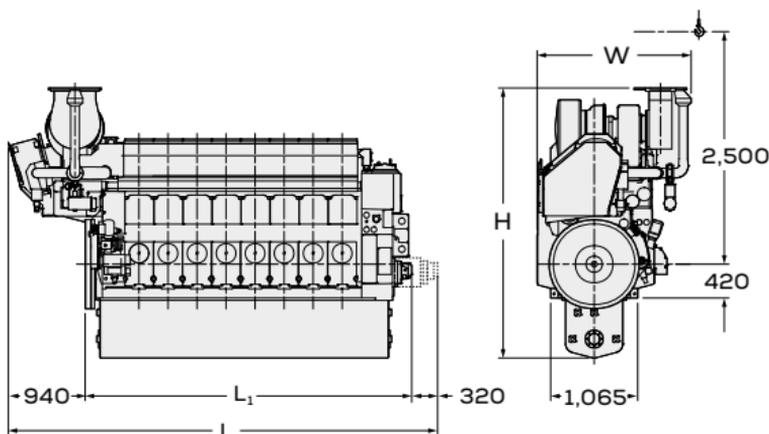

Bore: 175 mm, Stroke: 215 mm

| Engine model | Rating def. | kW | rpm | SFOC at 100% MCR | Avg. Load |
|--------------|---------------|-------|-------|------------------|-----------|
| | | | | Tier II/Tier III | |
| | | | | g/kWh | % |
| 12V175D-MH | Heavy duty | 1,740 | 1,800 | 192.5/193.0 | 85 |
| 12V175D-MM | Medium duty | 1,860 | 1,800 | 191.0/192.0 | 80 |
| 12V175D-MM | Medium duty | 1,920 | 1,800 | 193.0/194.0 | 80 |
| 12V175D-MM | Medium duty | 2,040 | 1,800 | 191.0/191.5 | 70 |
| 12V175D-MM | Medium duty** | 2,220 | 1,800 | 191.5/193.0 | 40 |
| 12V175D-MM | Medium duty | 2,220 | 1,900 | 195.0/196.0 | 65 |
| 12V175D-MM | Medium duty** | 2,400 | 1,800 | 193.0/193.0 | 40 |
| 12V175D-ML | Light duty | 2,400 | 2,000 | 197.5/198.0 | 60 |
| 12V175D-ML | Light duty | 2,580 | 2,000 | 202.0/ - | 60 |

For multi-engine arrangement only. Specific fuel oil consumption according to ISO 3046-1:2002 based on a lower calorific value of 42,700 kJ/kg with attached lube oil, HT and LT cooling water pumps fulfilling IMO Tier II/Tier III emission limits with 5% tolerance.


* Refer to page 105 for further information

** for tug applications only

Dimensions

| Cyl. No. | | 12 |
|----------------|----|-------|
| L ₁ | mm | 2,734 |
| L ₂ | mm | 167 |
| L ₃ | mm | 2,901 |
| H | mm | 2,295 |
| W | mm | 1,661 |
| Dry mass | t | 8.80 |

Configuration shown: Everllence 12V175D-MM without seawater cooler

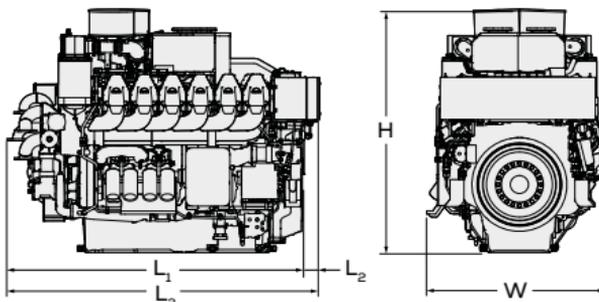

175D

16V

Methanol ready*

Tier II

Tier III

Tier III with SCR

Bore: 175 mm, **Stroke:** 215 mm

| Engine model | Rating def. | kW | rpm | SFOC at 100% MCR | Avg. load |
|-------------------|---------------|-------|-------|------------------|-----------|
| | | | | Tier II/Tier III | % |
| 16V175D-MM | Medium duty | 2,560 | 1,800 | g/kWh | |
| | | | | 193.0/194.0 | 80 |
| 16V175D-MM | Medium duty | 2,720 | 1,800 | 191.0/192.5 | 70 |
| 16V175D-MM | Medium duty** | 2,960 | 1,800 | 192.5/194.0 | 40 |
| 16V175D-MM | Medium duty | 2,960 | 1,900 | 196.0/197.0 | 65 |
| 16V175D-ML | Light duty | 3,200 | 2,000 | 197.5/198.0 | 60 |

For multi-engine arrangement only. Specific fuel oil consumption according to ISO 3046-1:2002 based on a lower calorific value of 42,700 kJ/kg with attached lube oil, HT and LT cooling water pumps fulfilling IMO Tier II/Tier III emission limits with 5% tolerance.


* Refer to page 105 for further information

** for tug applications only

Dimensions

| Cyl. No. | | | 16 |
|----------------------|----|--|-------|
| L₁ | mm | | 3,254 |
| L₂ | mm | | 167 |
| L₃ | mm | | 3,421 |
| H | mm | | 2,316 |
| W | mm | | 1,661 |
| Dry mass | t | | 10.85 |

Configuration shown: Everlence 16V175D-MM without seawater cooler

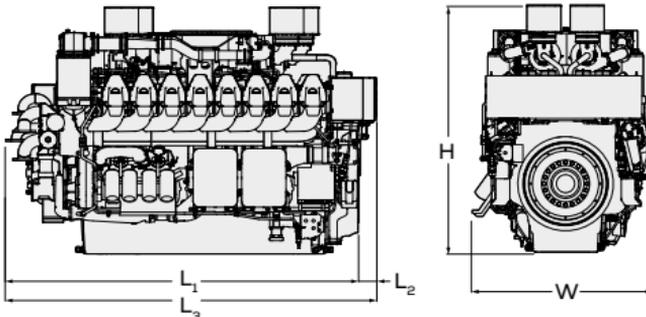

Bore: 175 mm, **Stroke:** 215 mm

| Engine model | Rating def. | kW | rpm | SFOC at 100% MCR | Avg. Load |
|--------------|---------------|-------|-------|------------------|-----------|
| | | | | Tier II/Tier III | |
| | | | | g/kWh | % |
| 20V175D-MM | Medium duty | 3,400 | 1,800 | 191.0/191.5 | 70 |
| 20V175D-MM | Medium duty** | 3,700 | 1,800 | 191.5/193.0 | 40 |
| 20V175D-MM | Medium duty | 3,700 | 1,900 | 194.0/195.0 | 65 |
| 20V175D-ML | Light duty | 4,000 | 2,000 | 197.5/198.0 | 60 |
| 20V175D-ML | Light duty | 4,400 | 2,000 | 199.0/- | 60 |

For multi-engine arrangement only. Specific fuel oil consumption according to ISO 3046-1:2002 based on a lower calorific value of 42,700 kJ/kg with attached lube oil, HT and LT cooling water pumps fulfilling IMO Tier II/Tier III emission limits with 5% tolerance.


* Refer to page 105 for further information

** for tug applications only

Dimensions (preliminary)

| Cyl. No. | | 20 |
|----------------|----|-------|
| L ₁ | mm | 3,774 |
| L ₂ | mm | 167 |
| L ₃ | mm | 3,941 |
| H | mm | 2,297 |
| W | mm | 1,647 |
| Dry mass | t | 13.10 |

Configuration shown: Everlence 20V175D-MM without seawater cooler

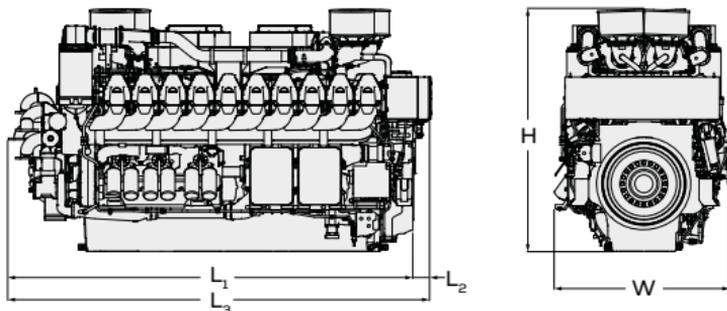



Everllence
four-stroke
marine mechanical
pump drive



Picture courtesy Dragages-Ports

V48/60CR

Tier II Tier III

Tier III with SCR

Bore: 480 mm, **Stroke:** 600 mm

| Speed | r/min | 514 | 500 |
|------------|-------|--------|--------|
| mep | bar | 23.2 | 23.9 |
| | | kW | kW |
| 12V48/60CR | | 12,960 | 12,960 |
| 14V48/60CR | | 15,120 | 15,120 |
| 16V48/60CR | | 17,280 | 17,280 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|----------|-------------|-------------|
| V48/60CR | 180.5 g/kWh | 175.5 g/kWh |


Specific lube oil consumption¹⁾: 0.6 g/kWh for nominal output 1,080 kW/cyl.

¹⁾ Related to 100% actual engine load

Dimensions

| Cyl. No. | | 12 | 14 | 16 |
|----------------|----|--------|--------|--------|
| L | mm | 10,790 | 11,790 | 13,140 |
| L ₁ | mm | 9,088 | 10,088 | 11,088 |
| Dry mass | t | 189 | 213 | 240 |

Minimum centreline distance for twin engine installation: 4,800 mm

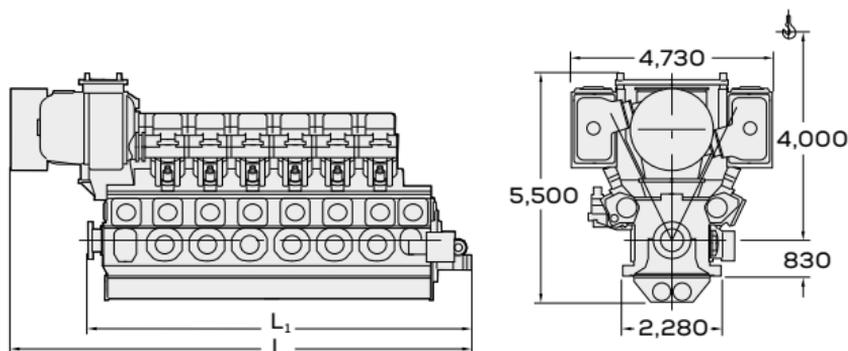

Tier III with SCR

Bore: 480 mm, **Stroke:** 600 mm

| Speed | r/min | 514 | 500 |
|------------------|--------------|-------------|-------------|
| mep | bar | 23.2 | 23.9 |
| | | kW | kW |
| 6L48/60CR | | 6,480 | 6,480 |
| 7L48/60CR | | 7,560 | 7,560 |
| 8L48/60CR | | 8,640 | 8,640 |
| 9L48/60CR | | 9,720 | 9,720 |


Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|-----------------|-------------|-------------|
| L48/60CR | 181.5 g/kWh | 177.5 g/kWh |

Specific lube oil consumption¹⁾: 0.6 g/kWh for nominal output 1,080 kW/cyl.¹⁾ Related to 100% actual engine load**Dimensions**

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------------|-----------|----------|----------|----------|----------|
| L | mm | 8,760 | 9,580 | 10,540 | 11,360 |
| L₁ | mm | 7,455 | 8,275 | 9,095 | 9,915 |
| W | mm | 3,165 | 3,165 | 3,280 | 3,280 |
| Dry mass | t | 106 | 119 | 135 | 148 |

Minimum centreline distance for twin engine installation: 3,200 mm

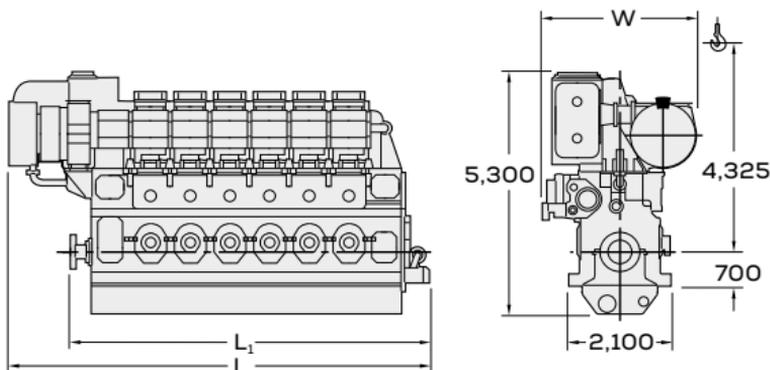

Bore: 320 mm, **Stroke:** 440 mm

| Speed | r/min | 750 |
|--------------------------------|-------|-------|
| mep | bar | 24.9 |
| | | kW |
| 12V32/44CR | | 6,600 |
| 14V32/44CR | | 7,700 |
| 16V32/44CR | | 8,800 |
| 18V32/44CR¹⁾ | | 9,900 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|-------------------|-------------|-------------|
| V32/44CR | 176.5 g/kWh | 172.5 g/kWh |
| 14V32/44CR | 177.5 g/kWh | 174.0 g/kWh |

Specific lube oil consumption²⁾: 0.55 g/kWh for nominal output 550 kW/cyl.

* Please contact Everlence for further details

Dimensions

| Cyl. No. | | 12 | 14 | 16 | 18 |
|------------------------------|----|-------|-------|-------|-------|
| L | mm | 7,195 | 7,970 | 8,600 | 9,230 |
| L₁ | mm | 5,795 | 6,425 | 7,055 | 7,685 |
| W | mm | 3,100 | 3,100 | 3,100 | 3,100 |
| H | mm | 4,039 | 4,262 | 4,262 | 4,262 |
| Dry mass³⁾ | t | 70 | 82 | 89 | 100 |


Minimum centreline distance for twin engine installation: 4,000 mm

¹⁾ 18V32/44CR available rigidly mounted only

²⁾ Related to 100% actual engine load

³⁾ Including built-on lube oil automatic filter, fuel oil filter and electronic equipment

Wet oil sump available upon request

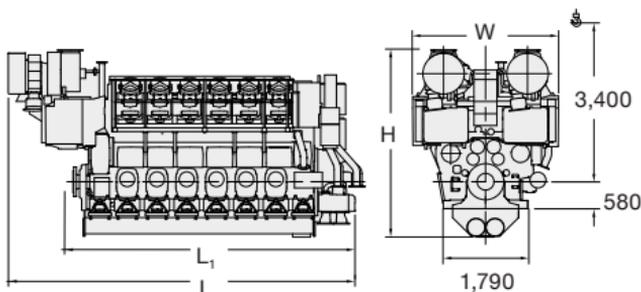

Tier III with SCR

Bore: 320 mm, **Stroke:** 440 mm

| Speed | r/min | 750 |
|------------|-------|-------|
| mep | bar | 24.9 |
| | | kW |
| 6L32/44CR | | 3,300 |
| 7L32/44CR | | 3,850 |
| 8L32/44CR | | 4,400 |
| 9L32/44CR | | 4,950 |
| 10L32/44CR | | 5,500 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|-----------|-------------|-------------|
| L32/44CR | 176.5 g/kWh | 172.5 g/kWh |
| 7L32/44CR | 177.5 g/kWh | 174.0 g/kWh |

Specific lube oil consumption¹⁾: 0.55 g/kWh for nominal output 550 kW/cyl.

* Please contact Everlence for further details

Dimensions


| Cyl. No. | | 6 | 7 | 8 | 9 | 10 |
|------------------------|----|-------|-------|-------|-------|-------|
| L | mm | 6,312 | 6,924 | 7,454 | 7,984 | 8,603 |
| L ₁ | mm | 5,265 | 5,877 | 6,407 | 6,937 | 7,556 |
| W | mm | 2,174 | 2,359 | 2,359 | 2,359 | 2,359 |
| H | mm | 4,163 | 4,369 | 4,369 | 4,369 | 4,369 |
| Dry mass ²⁾ | t | 42.5 | 48.5 | 53.5 | 58.0 | 63.5 |

Minimum centreline distance for twin engine installation: 2,500 mm

¹⁾ Related to 100% actual engine load

²⁾ Including built-on lube oil automatic filter, fuel oil filter and electronic equipment

Wet oil sump available upon request

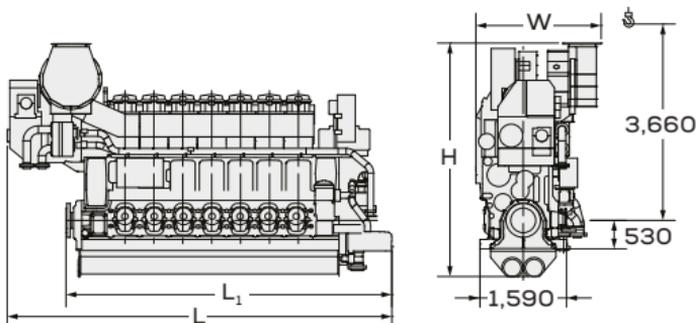

V32/40CD

NR Turbocharging variant

Tier II Tier III

Tier III with SCR

Bore: 320 mm, **Stroke:** 400 mm

| Speed | r/min | 750 |
|-------------------|-------|-------|
| mep | bar | 22.4 |
| | | kW |
| 12V32/40CD | | 5,400 |
| 14V32/40CD | | 6,300 |
| 16V32/40CD | | 7,200 |
| 18V32/40CD | | 8,100 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|---------------|-------------|-------------|
| V32/40 | 189.0 g/kWh | 189.0 g/kWh |

Specific lube oil consumption¹⁾: 0.56 g/kWh for nominal output 450 kW/cyl.


Dimensions

| Cyl. No. | | 12 | 14 | 16 | 18 |
|----------------------|----|-------|-------|-------|-------|
| L | mm | 6,915 | 7,545 | 8,365 | 8,995 |
| L₁ | mm | 5,890 | 6,520 | 7,150 | 7,780 |
| W | mm | 3,140 | 3,140 | 3,730 | 3,730 |
| H | mm | 4,100 | 4,100 | 4,420 | 4,420 |
| Dry mass | t | 61 | 68 | 77 | 85 |

Minimum centreline distance for twin engine installation: 4,000 mm

V32/40 as marine main engine to be applied for multi-engine plants only

¹⁾ Related to 100% actual engine load

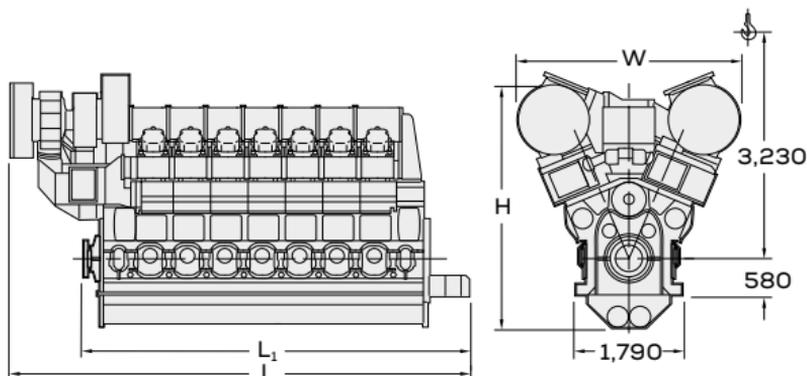

Bore: 320 mm, **Stroke:** 400 mm

| Speed | r/min | 750 |
|-----------|-------|-------|
| mep | bar | 22.4 |
| | | kW |
| 6L32/40CD | | 2,700 |
| 7L32/40CD | | 3,150 |
| 8L32/40CD | | 3,600 |
| 9L32/40CD | | 4,050 |

Specific fuel oil consumption (SFOC) at ISO conditions


| MCR | 100% | 85% |
|--------|-----------|-------------|
| L32/40 | 191 g/kWh | 190.0 g/kWh |

Specific lube oil consumption¹⁾: 0.56 g/kWh for nominal output 450 kW/cyl.**Dimensions**

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------|----|-------|-------|-------|-------|
| L | mm | 5,940 | 6,470 | 7,000 | 7,530 |
| L ₁ | mm | 5,140 | 5,670 | 6,195 | 6,725 |
| W | mm | 2,630 | 2,630 | 2,715 | 2,715 |
| H | mm | 4,010 | 4,010 | 4,490 | 4,490 |
| Dry mass | t | 38 | 42 | 47 | 51 |

Minimum centreline distance for twin engine installation: 2,500 mm. Please contact Everlence for the precise information about the centreline distance for two engines with the same cylinder number standing near each other.

¹⁾ Related to 100% actual engine load

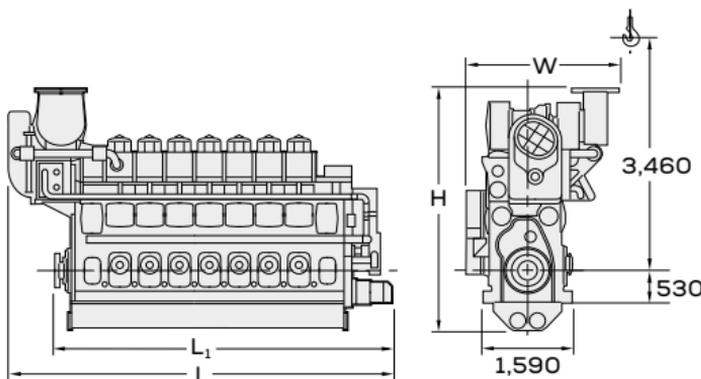

V32/40CD

TCF Turbocharging variant*

Tier II Tier III

Tier III with SCR

Bore: 320 mm, **Stroke:** 400 mm

| Speed | r/min | 750 |
|-------------------|-------|-------|
| mep | bar | 22.4 |
| | | kW |
| 12V32/40CD | | 5,400 |
| 14V32/40CD | | 6,300 |
| 16V32/40CD | | 7,200 |
| 18V32/40CD | | 8,100 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|---------------|-------------|-------------|
| V32/40 | 190.0 g/kWh | 188.0 g/kWh |

Specific lube oil consumption¹⁾: 0.56 g/kWh for nominal output 450 kW/cyl.

Dimensions


| Cyl. No. | | 12 | 14 | 16 | 18 |
|----------------------|----|-------|-------|-------|-------|
| L | mm | 6,974 | 7,604 | 8,228 | 8,858 |
| L₁ | mm | 5,890 | 6,520 | 7,150 | 7,780 |
| W | mm | 3,255 | 3,255 | 3,255 | 3,255 |
| H | mm | 4,181 | 4,181 | 4,181 | 4,181 |
| Dry mass | t | 62 | 69 | 76 | 84 |

Minimum centreline distance for twin engine installation: 4,000 mm

V32/40 as marine main engine to be applied for multi-engine plants only

¹⁾ Related to 100% actual engine load

* Release in October 2025, compliant with upcoming IMO rules 2027

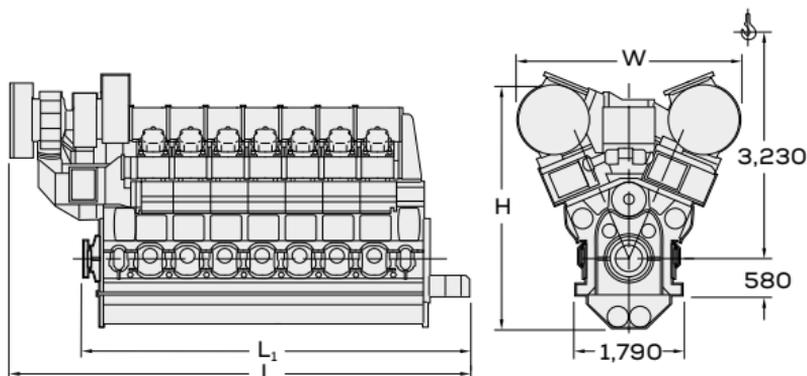

Bore: 320 mm, **Stroke:** 400 mm

| Speed | r/min | 750 |
|-----------|-------|-------|
| mep | bar | 22.4 |
| | | kW |
| 6L32/40CD | | 2,700 |
| 7L32/40CD | | 3,150 |
| 8L32/40CD | | 3,600 |
| 9L32/40CD | | 4,050 |

Specific fuel oil consumption (SFOC) at ISO conditions

| MCR | 100% | 85% |
|--------|-------------|-------------|
| L32/40 | 192.0 g/kWh | 190.0 g/kWh |


Specific lube oil consumption¹⁾: 0.56 g/kWh for nominal output 450 kW/cyl.**Dimensions**

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------|----|-------|-------|-------|-------|
| L | mm | 5,940 | 6,470 | 7,000 | 7,530 |
| L ₁ | mm | 5,140 | 5,670 | 6,195 | 6,725 |
| W | mm | 2,630 | 2,630 | 2,630 | 2,630 |
| H | mm | 4,010 | 4,010 | 4,010 | 4,010 |
| Dry mass | t | 38.5 | 42.5 | 47 | 51 |

Minimum centreline distance for twin engine installation: 2,500 mm. Please contact Everlence for the precise information about the centreline distance for two engines with the same cylinder number standing near each other.

¹⁾ Related to 100% actual engine load

* Release in October 2025, compliant with upcoming IMO rules 2027

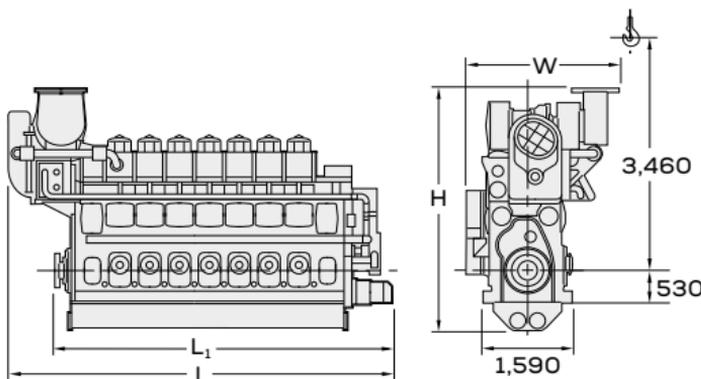



Everllence
four-stroke
marine GenSets



Everllence four-stroke marine GenSets – all emission requirements

Besides focus on power density and fuel economy, Everllence is committed to a steady reduction of the environmental impact of our engines.

IMO Tier II

Everllence has decreased NO_x emissions significantly by applying well-proven methods that ensure a cleaner and more efficient combustion process. Our four-stroke propulsion engines are IMO Tier II compliant by internal engine measures alone.

IMO Tier III


For operation in emission control areas (ECA), Everllence has developed a comprehensive range of selective catalytic reduction (SCR) systems that provides a tremendous reduction in NO_x levels surpassing IMO Tier III requirements.

The Everllence standard SCR system is available in fourteen different sizes covering our entire portfolio of four-stroke engines. Customised SCR systems are offered on demand.

Everllence has developed a complete range of SCR systems that works perfectly with our engines for maximum system efficiency. The intelligent exhaust gas temperature control enables significant savings in fuel consumption as compared to third party supplier systems.

- Control signal
- Urea solution
- Air

Do not scale from this drawing.

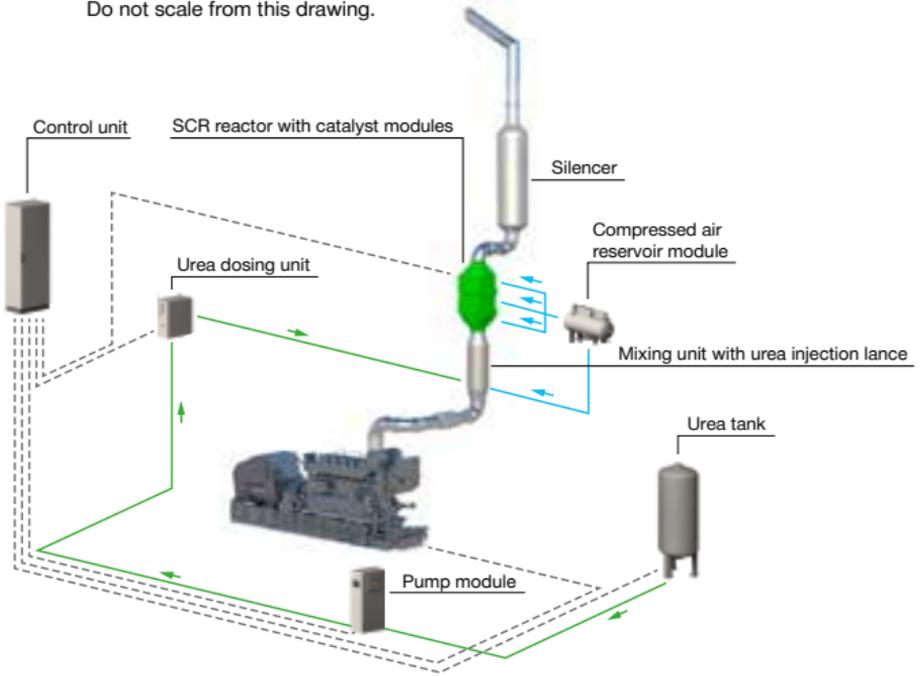

Everlence GenSet plant with complete SCR system

100% MCR PTO-solutions for L21/31 Mk 2, L27/38 and L28/32DF GenSets

Optimised for both new and existing ship designs.



PTO on alternator – external pump




Pump on alternator – common base frame



PTO on front end – external pump



Pump on front end – common base frame

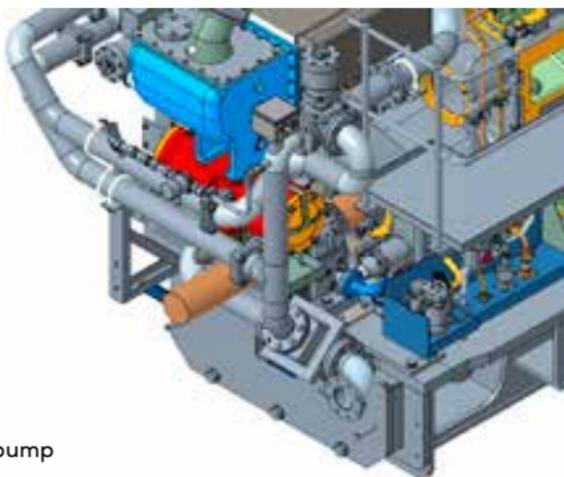

PTO on front end – external pump

Fuel oil saving for small bore GenSet (part load optimised)

GenSets can be delivered with improved fuel oil consumption at low load and part load. The penalty will be higher SFOC at high load. The part-load optimised engine complies with the IMO Tier II limit.


The new tuning method, referred to as part-load optimisation, optimises the engine performance at approx. 60-65% MCR, as this is often the load range in which the GenSet is operating, but it can also be customised to other specific operating conditions.

With the new development of L21/31 Mk 2 together with part-load optimisation techniques, fuel oil savings of up to nearly 12 g/kWh have been obtained, depending on the engine type/model and load point.

Traditionally, GenSets are optimised at 80-85% MCR due to limitations in turbocharger matching, but this is also the load point where power management will engage additional GenSets when more power is needed.

With part-load optimisation, there is a fuel oil penalty when the load exceeds approx. 80% MCR, but this has no practical consequence as the GenSet rarely exceeds 85% MCR.

This is illustrated in the figure below. For further information, please contact Everllence.

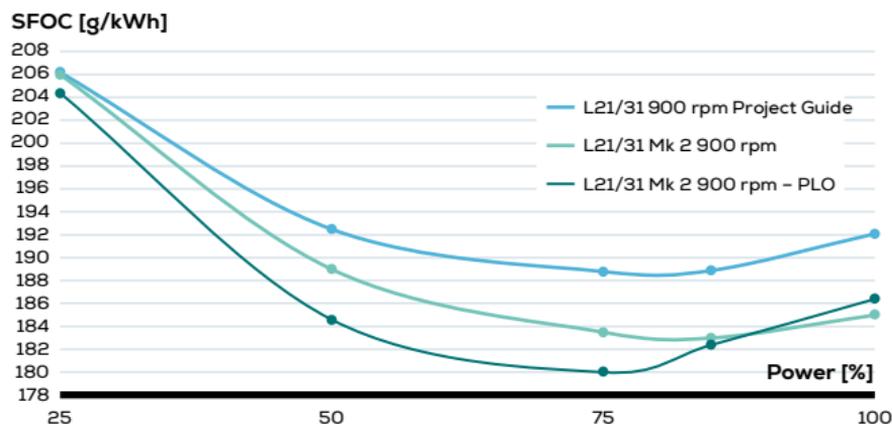

Based on Project Guide figures for IMO Tier II engines – 60Hz: ISO reference condition, HFO/MDO, without pumps, tolerance +5% (not included) August 2020.


Electric and hybrid propulsion trains (HyProp ECO)

Everllence offers a full range of electric and hybrid power and propulsion plants. Our solutions are designed and optimised to meet the highest efficiencies of an integrated system covering the complete operational profile of the vessel. Our propulsion systems provide a well-balanced and tailor-made solution with emphasis on increased fuel efficiency, flexibility and performance.

Our comprehensive propulsion packages include the complete array of required components from GenSets to propulsors, including switchboards, variable speed drives, propulsion motors and controls. They ensure the optimal technical and economical solution while minimising operational costs.

The HyProp ECO introduces a system to control the power delivered by or to the shaft machine. It overcomes the constraint on constant speed propulsion machinery by utilising variable speed drives at the shaft generator/motor.


Our innovative HyProp Battery system also integrates batteries, which enable an optimised loading of our engines, and provide an electric spinning reserve, dynamic support of the propellers as well as peak shaving.

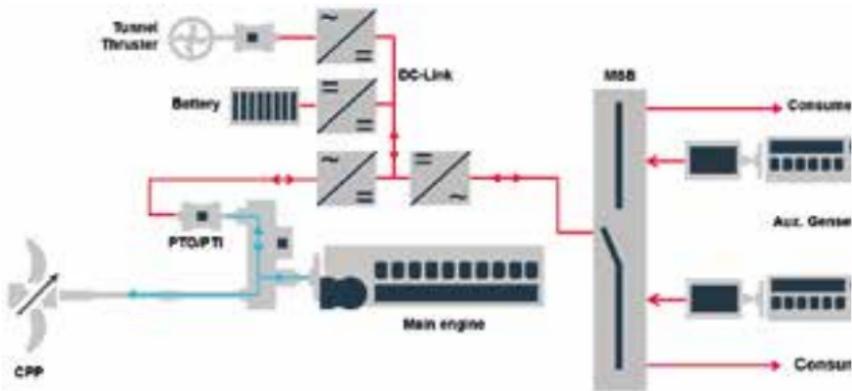

HyProp ECO Battery system with integrated energy storage system

HyProp ECO

Hybrid
propulsion
system

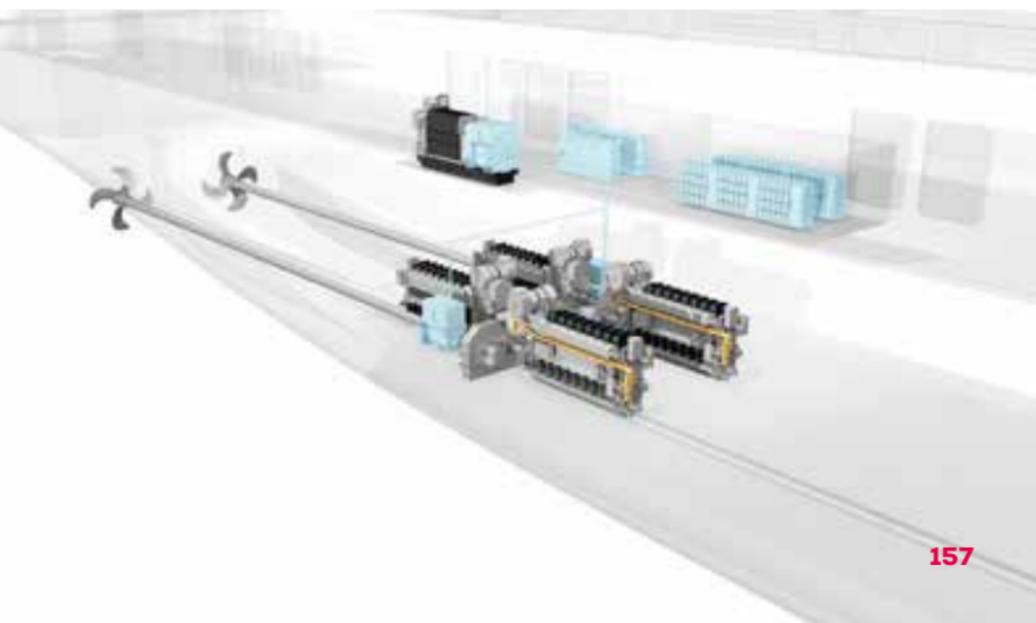


Energy-saving electric propulsion (EPROX-DC)

Recent developments in electric propulsion have resulted in electric systems where engines can operate at variable speed. The “classic” constant speed operation of GenSets is no longer a constraint. Utilising an enlarged engine operation map with a speed range of 60% to 100% paves the way to a high potential in fuel oil savings. Each speed set point of the engines can be adjusted independently in order to achieve a minimum fuel oil consumption according to the system load. The electric system using DC distribution enables a decoupled operation of the engines, propulsion drives, and other consumers.

Another major advantage is the possible integration of energy storage systems, like batteries. They can reduce the transient loads on the engines and improve the dynamic response of the propulsion system. Fast load application is removed from the engines and load peaks are shaved. Also, emission free propulsion can be realised when running on the batteries. In addition, the energy storage system allows a constant and high loading of the engines, provides spinning reserve and will have a positive effect on engine maintenance.


Everlence offers this advanced package solution in close cooperation with our partner Aspin Kemp & Associates.

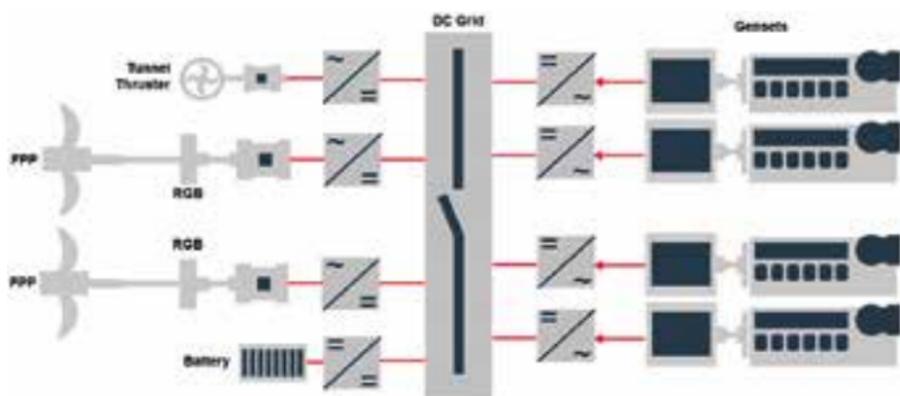

EPROX-DC energy-saving electric propulsion plant

EPROX-DC

propulsion
solution

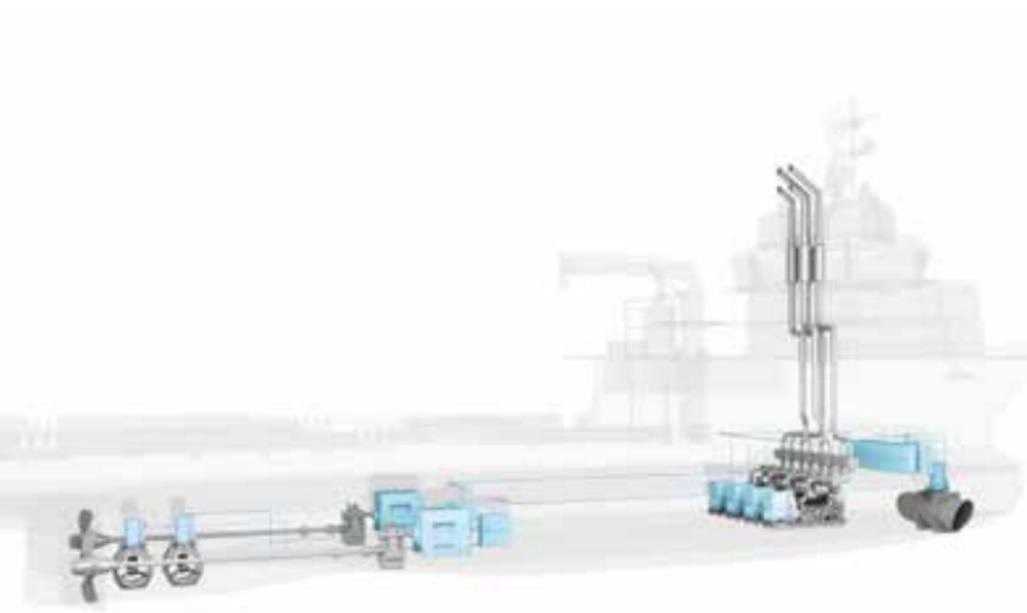

EPROX-DC propulsion solution on anchor handling tug supply vessel


L23/30H monocoque GenSet – continued development

The monocoque GenSet includes several updates of the tried and tested L23/30H engine, which are focused on weight reduction, vibration optimisation and simplified installation.

The most significant update is that the alternator is now a load-bearing component, with a 'top brace' connection to the engine. This enables up to 63% weight reduction of the base frame, which again results in weight reduction of up to 13% of the GenSet and a lower vibration level.

The three and four point 'deck-level' supports significantly simplify the GenSet installation process. This design is installed on a flat deck, which is a major reduction of the vessels foundation structure. Furthermore, applying only three conicals makes the GenSets self-leveling.

The monocoque GenSet application is available for all variants of the L23/30H engine.

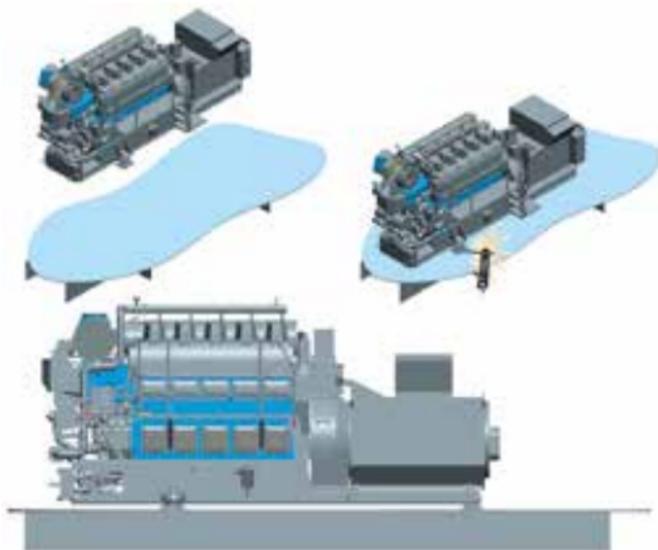

Monocoque GenSet

Marine fuels after 2020 (in accordance with ISO 8217)

From 1 January 2020, the global 0.5% limit for sulphur content in marine fuels enters into force. To ensure compliant operation, one of following methods must be used:

- HFO GenSet running on a compliant low-sulphur fuel oil (LSFO) in accordance with ISO 8217.
- Global: max. 0.5% sulphur (VLSFO).
- ECA: max. 0.1% sulphur (ULSFO).
- HFO GenSet running on a high-sulphur fuel oil (HSFO) in accordance with ISO 8217 and with a SO_x scrubber for exhaust gas cleaning.
- DF GenSet running on LNG with a compliant pilot distillate fuel.

Everllence GenSets have for decades been running on low-sulphur and low-viscosity fuels on small power plants on Greenland. The many years of experience have been transferred to the standard marine GenSet. To be prepared for operation on compliant fuels after 2020, the HFO GenSets will be updated with optimised fuel pumps and inlet/exhaust valve materials for low-viscosity fuels.

It is important to note that paraffinic and aromatic fuels are incompatible and should not be mixed in the same fuel tank. Notice the issued Service Letters, PrimeServ Customer Information and follow Everllence guidelines.



■ ECAs – 0.10% S (effective 2015) ■ Global sulfur cap – 0.50% S (effective 2020)

Methanol

Everllence is developing methanol technology paths for various engine types. Green methanol is an important fuel option to decarbonise the operation of propulsion and auxiliary GenSet equipment. Ensuring the feasibility of later retrofits can be crucial to avoid the risk of stranded assets by enabling the concurrent adaption of ships to expected regulations and fuel supply.

Products marked with **Methanol ready*** are intended to be available in future to be sold as methanol capable or will be intended to be available for retrofit to methanol operation under specific boundary conditions.

Please contact Everllence for further details on the engines marked as methanol ready, the certifying class societies, and the currently expected availability of methanol ready for the individually marked engines.



Everllence

Power

through
uncertainty

**Reliable four-stroke
small-bore engines for
the world's merchant fleet**

Regulatory and fuel-related uncertainty can make it difficult to plan investments in propulsion and GenSets. With our small-bore engines, you are prepared for whatever lies ahead.

Everllence has built its position as the leading designer and developer of small-bore engines for the world's merchant marine fleet on the basis of high reliability and efficiency.

www.everllence.com/small-bore

Everllence

four-stroke marine GenSets programme


| r/min | Engine type | | | |
|-------------|--------------------------------------|--|--|--|
| 720-750 | L35/44CD | | | |
| 720-750 | L35/44DF CD | | | |
| 720-750 | V32/44CR | | | |
| 720-750 | L32/44CR | | | |
| 720-750 | V32/40CD - NR Turbocharging variant | | | |
| 720-750 | L32/40CD - NR Turbocharging variant | | | |
| 720-750 | V32/40CD - TCF Turbocharging variant | | | |
| 720-750 | L32/40CD - TCF Turbocharging variant | | | |
| 720-750 | L28/32DF | | | |
| 720-750 | L27/38 L27/38 (MDO/MGO) | | | |
| 720-900 | L27/38 Mk 2 | | | |
| 720-900 | L27/38DF-M | | | |
| 720-900 | L23/30H Mk 3 | | | |
| 720-900 | L23/30H Mk 2 | | | |
| 720-900 | L23/30DF | | | |
| 900-1,000 | L21/31 Mk 2 | | | |
| 900-1,000 | L21/31DF-M | | | |
| 1,080-1,800 | 175D | | | |
| 1,300 | S.E.M.T. Pielstick PA4 SM & SMDS | | | |
| 900-1,000 | S.E.M.T. Pielstick PA6B | | | |

0 1,000

GenSets

GenSets can be applied as auxiliary GenSets, GenSets for electric propulsion or for offshore applications.

Project specific demands can be clarified at an early project stage.

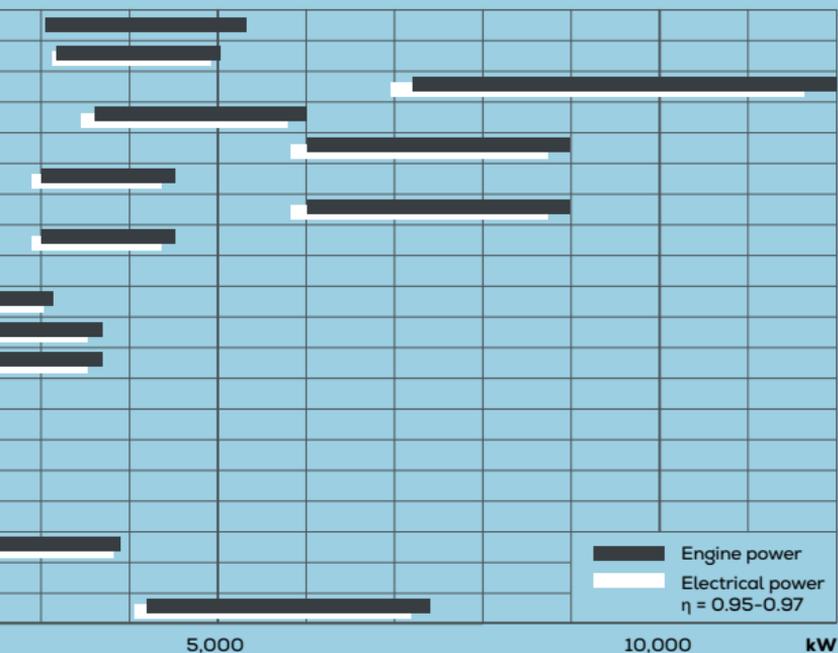

Tier III GenSets

Four-stroke GenSets are Tier III compatible when a downstream SCR is added to clean the exhaust gas on a Tier II engine. The additional SCR will only have an impact on SFOC if the backpressure is increased.


Bore: 350 mm, Stroke: 440 mm

| Speed | r/min | 750 | | 720 | |
|-----------|-------|-----------|-----------------------|---------|-----------------------|
| | | 50 | | 60 | |
| Frequency | Hz | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| | | 6L35/44CD | | 3,360 | 3,242 |
| 7L35/44CD | | 3,920 | 3,783 | 3,920 | 3,783 |
| 8L35/44CD | | 4,480 | 4,323 | 4,480 | 4,323 |
| 9L35/44CD | | 5,040 | 4,864 | 5,040 | 4,864 |

* Refer to page 162 for further information

Dimensions²⁾

| Cyl. No. | | 6 | 7 | 8 | 9 |
|------------------------|----|--------|--------|--------|--------|
| A | mm | 6,270 | 6,900 | 7,480 | 8,110 |
| B ³⁾ | mm | 3,900 | 4,100 | 4,400 | 4,600 |
| C ³⁾ | mm | 10,170 | 11,000 | 11,880 | 12,710 |
| W | mm | 2,958 | 3,108 | 3,108 | 3,108 |
| H | mm | 4,631 | 4,867 | 4,867 | 4,867 |
| Dry mass ³⁾ | t | 76 | 84 | 91 | 96 |

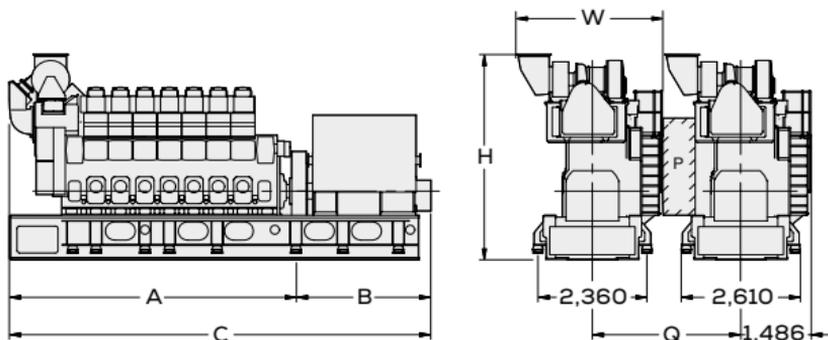¹⁾ Based on nominal generator efficiencies of 96.5%²⁾ Dimensions are not finally fixed³⁾ Depending on alternator applied

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~3,400 mm (with gallery)

Tier III with SCR

Bore: 350 mm, Stroke: 440 mm

| Speed | r/min | 750 | | 720 | |
|--------------|-------|---------|-----------------------|---------|-----------------------|
| Frequency | Hz | 50 | | 60 | |
| | | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 6L35/44DF CD | | 3,360 | 3,242 | 3,360 | 3,242 |
| 7L35/44DF CD | | 3,920 | 3,783 | 3,920 | 3,783 |
| 8L35/44DF CD | | 4,480 | 4,323 | 4,480 | 4,323 |
| 9L35/44DF CD | | 5,040 | 4,864 | 5,040 | 4,864 |

* Refer to page 162 for further information


Dimensions²⁾

| Cyl. No. | | 6 | 7 | 8 | 9 |
|------------------------|----|--------|--------|--------|--------|
| A | mm | 6,270 | 6,900 | 7,480 | 8,110 |
| B ³⁾ | mm | 3,900 | 4,100 | 4,400 | 4,600 |
| C ³⁾ | mm | 10,170 | 11,000 | 11,880 | 12,710 |
| W | mm | 2,958 | 3,108 | 3,108 | 3,108 |
| H | mm | 4,631 | 4,867 | 4,867 | 4,867 |
| Dry mass ³⁾ | t | 76 | 84 | 91 | 96 |

¹⁾ Based on nominal generator efficiencies of 96.5%

²⁾ Dimensions are not finally fixed

³⁾ Depending on alternator applied

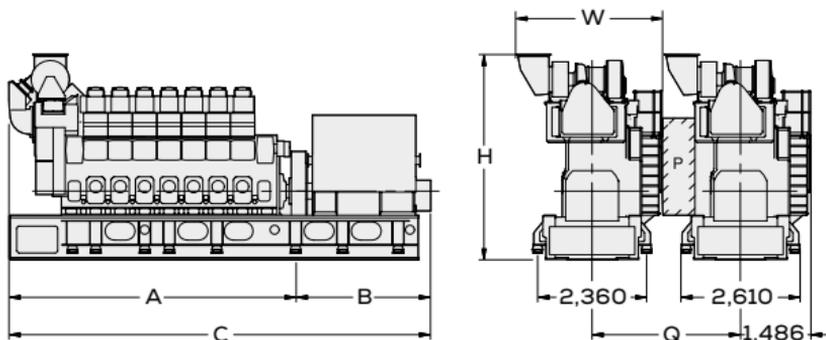

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~3,400 mm (with gallery)

Bore: 320 mm, **Stroke:** 440 mm

| Speed | r/min | 750 | | 720 | |
|--------------------------------|-------|---------|-----------------------|---------|-----------------------|
| | Hz | 50 | | 60 | |
| Frequency | Hz | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 12V32/44CR | | 7,200 | 6,984 | 7,200 | 6,984 |
| 14V32/44CR²⁾ | | 8,120 | 7,876 | 8,120 | 7,876 |
| 16V32/44CR | | 9,600 | 9,312 | 9,600 | 9,312 |
| 18V32/44CR³⁾ | | 10,800 | 10,476 | 10,800 | 10,476 |
| 20V32/44CR | | 12,000 | 11,640 | 12,000 | 11,640 |

* Refer to page 162 for further information

Dimensions

| Cyl. No. | | 12 | 14 | 16 | 18 | 20 |
|-----------------|----|----------|--------|--------|--------|--------|
| | | A | mm | 7,075 | 7,705 | 8,335 |
| B | mm | 4,301 | 4,501 | 4,346 | 4,346 | 4,546 |
| C | mm | 11,376 | 12,206 | 12,681 | 13,311 | 14,141 |
| H | mm | 4,771 | 5,014 | 5,014 | 5,014 | 5,014 |
| Dry mass | t | 117 | 144 | 146 | 163 | 174 |


¹⁾ Based on nominal generator efficiencies of 97%

²⁾ 580 kW/cyl.

³⁾ 18V32/44CR available rigidly mounted only

Frame Auxiliary Box (FAB) available upon request

Available for Electric Propulsion application and as Auxiliary GenSet

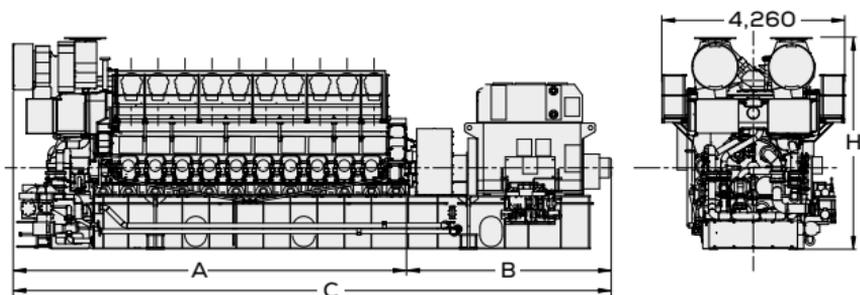

Tier III with SCR

Bore: 320 mm, **Stroke:** 440 mm

| Speed | r/min | 750 | | 720 | |
|-------------------------------|-------|---------|-----------------------|---------|-----------------------|
| | | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 6L32/44CR | | 3,600 | 3,474 | 3,600 | 3,474 |
| 7L32/44CR²⁾ | | 4,060 | 3,918 | 4,060 | 3,918 |
| 8L32/44CR | | 4,800 | 4,632 | 4,800 | 4,632 |
| 9L32/44CR | | 5,400 | 5,211 | 5,400 | 5,211 |
| 10L32/44CR | | 6,000 | 5,790 | 6,000 | 5,790 |

* Refer to page 162 for further information

Dimensions


| Cyl. No. | | 6 | 7 | 8 | 9 | 10 |
|----------------------|-----------|--------|--------|--------|--------|--------|
| L | mm | 10,386 | 10,896 | 11,385 | 11,871 | 12,601 |
| L₁ | mm | 9,331 | 9,861 | 10,231 | 10,761 | 11,491 |
| W | mm | 2,831 | 3,018 | 3,018 | 3,018 | 3,018 |
| H | mm | 4,768 | 4,955 | 4,955 | 4,955 | 4,955 |
| Dry mass | t | 74 | 82 | 88 | 95 | 103 |

¹⁾ Based on nominal generator efficiencies of 96.5%

²⁾ 580 kW/cyl.

Frame Auxiliary Box (FAB) available upon request

Available for Electric Propulsion application and as Auxiliary GenSet

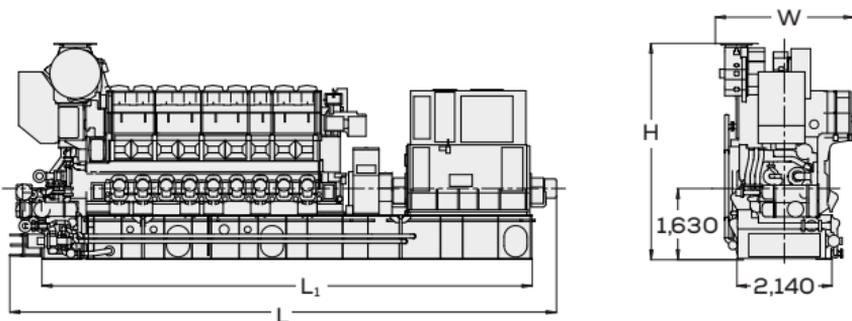

Free passage between the engines, width 600 mm and height 2,000 mm
 Minimum distance between centre of engines: ~2,835 mm (without gallery)
 ~3,220 mm (with gallery)

V32/40CD

NR Turbocharging variant

Tier II Tier III

Tier III with SCR

Bore: 320 mm, **Stroke:** 400 mm



| Speed | r/min | 750 | | 720 | |
|-------------------|--------------|----------------|-----------------------------|----------------|-----------------------------|
| Frequency | Hz | 50 | | 60 | |
| | | Eng. kW | Gen. kW¹⁾ | Eng. kW | Gen. kW¹⁾ |
| 12V32/40CD | | 6,000 | 5,820 | 6,000 | 5,820 |
| 14V32/40CD | | 7,000 | 6,790 | 7,000 | 6,790 |
| 16V32/40CD | | 8,000 | 7,760 | 8,000 | 7,760 |
| 18V32/40CD | | 9,000 | 8,730 | 9,000 | 8,730 |

Dimensions

| Cyl. No. | | 12 | 14 | 16 | 18 |
|----------------------|-----------|-----------|-----------|-----------|-----------|
| L | mm | 11,045 | 11,710 | 12,555 | 13,185 |
| L₁ | mm | 10,450 | 11,115 | 11,950 | 12,580 |
| W | mm | 3,365 | 3,365 | 3,730 | 3,730 |
| H | mm | 4,850 | 4,850 | 5,245 | 5,245 |
| Dry mass | t | 101 | 113 | 126 | 138 |

¹⁾ Based on nominal generator efficiencies of 97%

Available for Electric Propulsion application and as Auxiliary GenSet

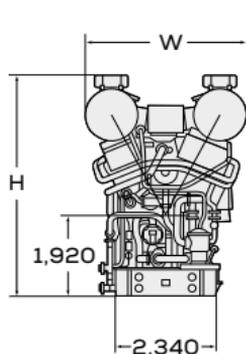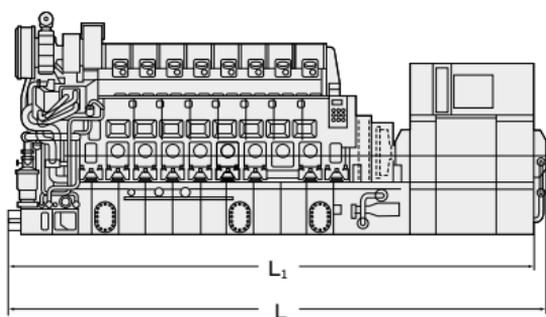

Bore: 320 mm, Stroke: 400 mm


| Speed | r/min | 750 | | 720 | |
|-----------|-------|---------|-----------------------|---------|-----------------------|
| Frequency | Hz | 50 | | 60 | |
| | | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 6L32/40CD | | 3,000 | 2,895 | 3,000 | 2,895 |
| 7L32/40CD | | 3,500 | 3,378 | 3,500 | 3,378 |
| 8L32/40CD | | 4,000 | 3,860 | 4,000 | 3,860 |
| 9L32/40CD | | 4,500 | 4,343 | 4,500 | 4,343 |

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------|----|-------|--------|--------|--------|
| A | mm | 6,340 | 6,870 | 7,400 | 7,930 |
| B | mm | 3,415 | 3,415 | 3,635 | 3,635 |
| C | mm | 9,755 | 10,285 | 11,035 | 11,565 |
| H | mm | 4,622 | 4,622 | 4,840 | 4,840 |
| Dry mass | t | 70.5 | 74.5 | 82.0 | 86.0 |

¹⁾ Based on nominal generator efficiencies of 96.5%

Available for Electric Propulsion application and as Auxiliary GenSet

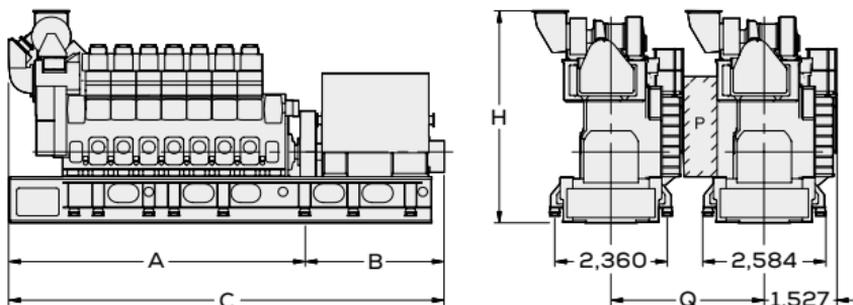

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,835 mm (without gallery)
~3,220 mm (with gallery)

V32/40CD

TCF Turbocharging variant*

Tier II Tier III

Tier III with SCR

Bore: 320 mm, **Stroke:** 400 mm

| Speed | r/min | 750 | | 720 | |
|-------------------|-------|---------|-----------------------|---------|-----------------------|
| Frequency | Hz | 50 | | 60 | |
| | | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 12V32/40CD | | 6,000 | 5,820 | 6,000 | 5,820 |
| 14V32/40CD | | 7,000 | 6,790 | 7,000 | 6,790 |
| 16V32/40CD | | 8,000 | 7,760 | 8,000 | 7,760 |
| 18V32/40CD | | 9,000 | 8,730 | 9,000 | 8,730 |


Dimensions

| Cyl. No. | | 12 | 14 | 16 | 18 |
|----------------------|----|--------|--------|--------|--------|
| L | mm | 11,045 | 11,710 | 12,555 | 13,185 |
| L₁ | mm | 10,450 | 11,115 | 11,950 | 12,580 |
| W | mm | 3,365 | 3,365 | 3,730 | 3,730 |
| H | mm | 4,931 | 4,931 | 4,931 | 4,931 |
| Dry mass | t | 102 | 114 | 125 | 137 |

¹⁾ Based on nominal generator efficiencies of 97%

Available for Electric Propulsion application and as Auxiliary GenSet

* Release in October 2025, compliant with upcoming IMO rules 2027

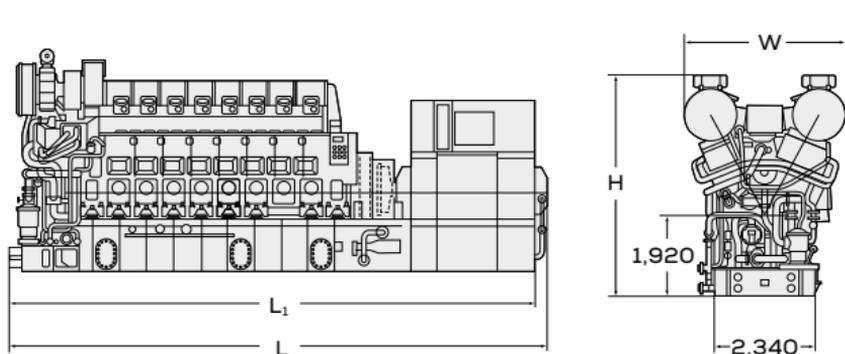

Bore: 320 mm, Stroke: 400 mm

| Speed | r/min | 750 | | 720 | |
|-----------|-------|---------|-----------------------|---------|-----------------------|
| Frequency | Hz | 50 | | 60 | |
| | | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 6L32/40CD | | 3,000 | 2,895 | 3,000 | 2,895 |
| 7L32/40CD | | 3,500 | 3,378 | 3,500 | 3,378 |
| 8L32/40CD | | 4,000 | 3,860 | 4,000 | 3,860 |
| 9L32/40CD | | 4,500 | 4,343 | 4,500 | 4,343 |


Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------|----|-------|--------|--------|--------|
| A | mm | 6,340 | 6,870 | 7,400 | 7,930 |
| B | mm | 3,415 | 3,415 | 3,635 | 3,635 |
| C | mm | 9,755 | 10,285 | 11,035 | 11,565 |
| H | mm | 4,622 | 4,622 | 4,622 | 4,622 |
| Dry mass | t | 71 | 75 | 81.5 | 85.5 |

¹⁾ Based on nominal generator efficiencies of 96.5%

Available for Electric Propulsion application and as Auxiliary GenSet

* Release in October 2025, compliant with upcoming IMO rules 2027

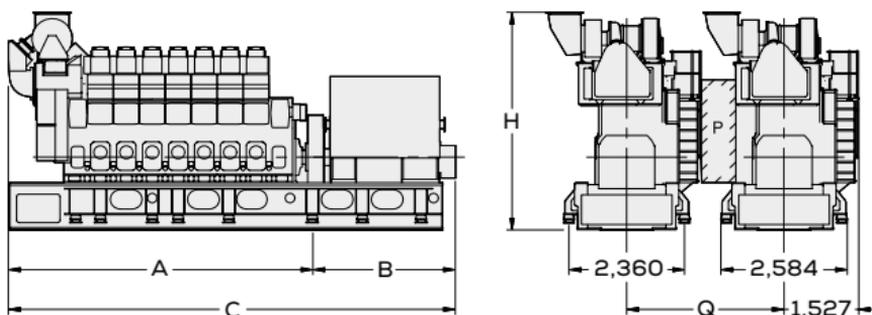

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,835 mm (without gallery)
~3,220 mm (with gallery)


Bore: 280 mm, Stroke: 320 mm

| Speed | r/min | 750 | | 720 | |
|-----------|-------|-----------|-------|-----------------------|-------|
| | | 50 | | 60 | |
| Frequency | Hz | Eng. kW | | Gen. kW ¹⁾ | |
| | | 5L28/32DF | | 1,050 | 1,000 |
| 6L28/32DF | | 1,260 | 1,200 | 1,260 | 1,200 |
| 7L28/32DF | | 1,470 | 1,400 | 1,470 | 1,400 |
| 8L28/32DF | | 1,680 | 1,600 | 1,680 | 1,600 |
| 9L28/32DF | | 1,890 | 1,800 | 1,890 | 1,800 |

Dimensions

| Cyl. No. | | 5 | 6 | 7 | 8 | 9 |
|----------|----|-------|-------|-------|-------|-------|
| A | mm | 4,321 | 4,801 | 5,281 | 5,761 | 6,241 |
| B | mm | 2,400 | 2,510 | 2,680 | 2,770 | 2,690 |
| C | mm | 6,721 | 7,311 | 7,961 | 8,531 | 8,931 |
| H | mm | 2,835 | 3,009 | 3,009 | 3,009 | 3,009 |
| Dry mass | t | 32.6 | 36.3 | 39.4 | 40.7 | 47.1 |

¹⁾ Based on nominal generator efficiencies of 95%
Gas methane number ≥ 80

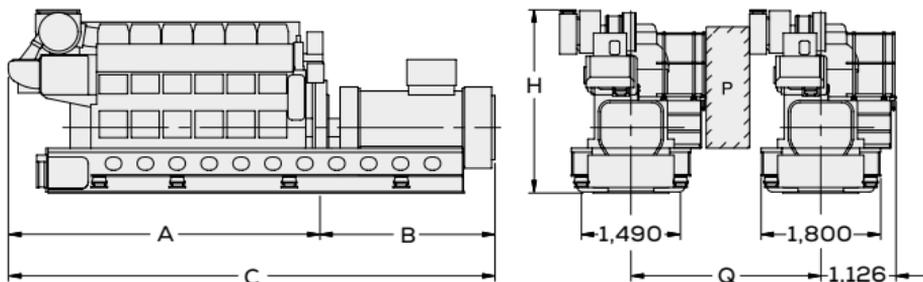

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,655 mm (without gallery)
~2,850 mm (with gallery)

Everllence


The full spectrum of

power

Discover the 35/44DF CD GenSet

Low carbon emissions, high power density, fuel flexibility, and future-proof engineering: the new 35/44DF CD delivers a full spectrum of strengths. Its unique blend of proven and innovative technologies is designed to boost your economic and environmental performance, even reducing methane slip by up to 85% compared with the standard.

www.everllence.com

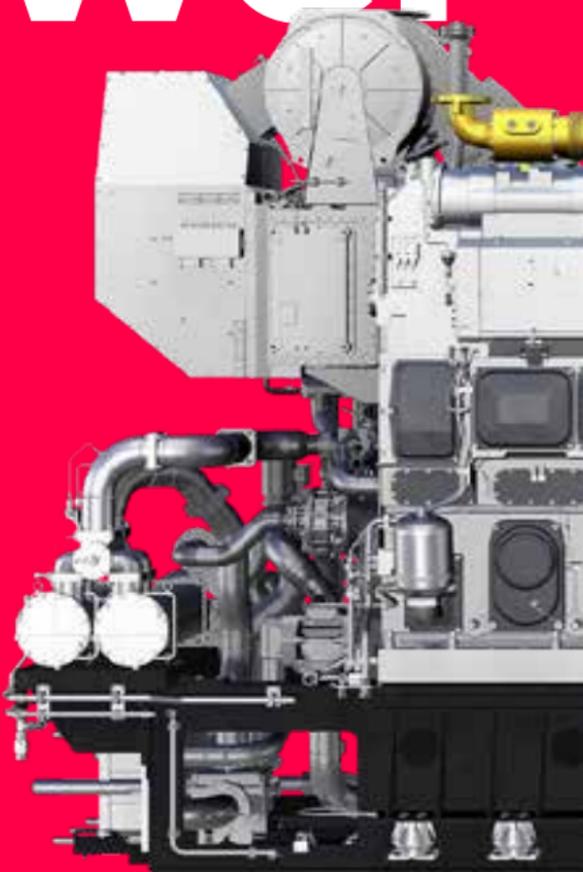


Bore: 270 mm, Stroke: 380 mm

| Speed | r/min | 750/720 | | 750/720 (MDO ¹⁾ /MGO) | |
|-----------|-------|-------------|-----------------------|----------------------------------|-----------------------|
| | | 50/60 | | 50/60 | |
| Frequency | Hz | Eng. kW | Gen. kW ²⁾ | Eng. kW | Gen. kW ²⁾ |
| 5L27/38 | | 1,600/1,500 | 1,535/1,440 | - | - |
| 6L27/38 | | 1,980 | 1,900 | 2,100 | 2,015 |
| 7L27/38 | | 2,310 | 2,220 | 2,450 | 2,355 |
| 8L27/38 | | 2,640 | 2,535 | 2,800 | 2,690 |
| 9L27/38 | | 2,970 | 2,850 | 3,150 | 3,025 |

Dimensions

| Cyl. No. | | 5 | 6 | 7 | 8 | 9 |
|----------|----|-------|-------|-------|-------|-------|
| A | mm | 4,346 | 4,791 | 5,236 | 5,681 | 6,126 |
| B | mm | 2,486 | 2,766 | 2,766 | 2,986 | 2,986 |
| C | mm | 6,832 | 7,557 | 8,002 | 8,667 | 9,112 |
| H | mm | 3,712 | 3,712 | 3,899 | 3,899 | 3,899 |
| Dry mass | t | 40.0 | 44.5 | 50.4 | 58.2 | 64.7 |

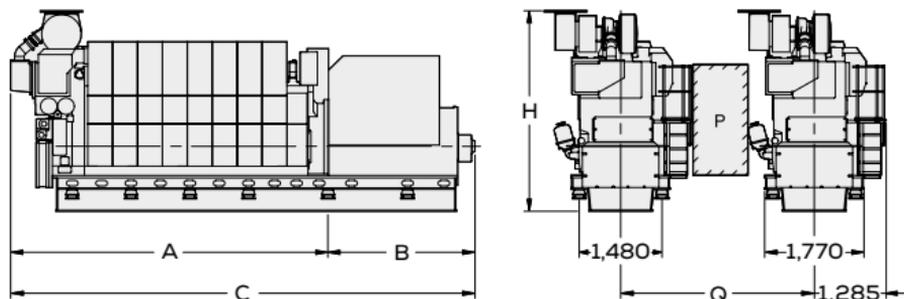¹⁾ MDO viscosity must not exceed 6 mm²/s = cSt @ 40°C²⁾ Based on nominal generator efficiencies of 96%

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,900 mm (without gallery)
~3,100 mm (with gallery).

Tier III with SCR

Bore: 270 mm, Stroke: 380 mm

| Speed | r/min | 750/720 | | 900 | |
|--------------|-------|---------|-----------------------|---------|-----------------------|
| Frequency | Hz | 50/60 | | 60 | |
| | | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 6L27/38 Mk 2 | | 1,980 | 1,900 | 2,460 | 2,360 |
| 7L27/38 Mk 2 | | 2,310 | 2,220 | 2,870 | 2,755 |
| 8L27/38 Mk 2 | | 2,640 | 2,535 | 3,280 | 3,150 |
| 9L27/38 Mk 2 | | 2,970 | 2,850 | 3,690 | 3,540 |

* Refer to page 162 for further information


Dimensions (6-7 cylinders)

| Cyl. No. | | 6 | | 7 | |
|----------|-------|-------------|-------|-------------|-------|
| Speed | r/min | 750/720 | 900 | 750/720 | 900 |
| A | mm | 4,859/4,859 | 4,859 | 5,304/5,304 | 5,304 |
| B | mm | 2,373/2,453 | 2,811 | 2,373/2,811 | 2,811 |
| C | mm | 7,232/7,312 | 7,670 | 7,677/8,115 | 8,115 |
| H | mm | 4,242/4,242 | 4,242 | 4,429/4,429 | 4,429 |
| Dry mass | t | 43.5/43.5 | 43.5 | 49.3/49.3 | 49.3 |

Dimensions (8-9 cylinders)

| Cyl. No. | | 8 | | 9 | |
|----------|-------|-------------|-------|-------------|-------|
| Speed | r/min | 750/720 | 900 | 750/720 | 900 |
| A | mm | 5,749/5,749 | 5,749 | 6,194/6,194 | 6,194 |
| B | mm | 2,811/2,811 | 2,933 | 2,811/2,881 | 3,128 |
| C | mm | 8,560/8,560 | 8,682 | 9,005/9,075 | 9,322 |
| H | mm | 4,429/4,429 | 4,429 | 4,429/4,429 | 4,429 |
| Dry mass | t | 57.0/57.0 | 57.0 | 63.5/63.5 | 63.5 |

¹⁾ Based on nominal generator efficiencies of 96%

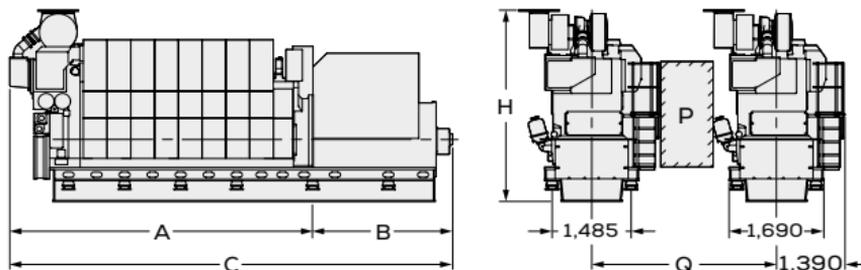

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,900 mm (without gallery)
~3,100 mm (with gallery).

Bore: 270 mm, Stroke: 380 mm

| Speed | r/min | 750/720 | | 900 | |
|-------------|-------|---------|-----------------------|---------|-----------------------|
| | | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 6L27/38DF-M | | 1,980 | 1,900 | 2,460 | 2,360 |
| 7L27/38DF-M | | 2,310 | 2,220 | 2,870 | 2,755 |
| 8L27/38DF-M | | 2,640 | 2,535 | 3,280 | 3,150 |
| 9L27/38DF-M | | 2,970 | 2,850 | 3,690 | 3,540 |


* Refer to page 162 for further information

Dimensions (6-7 cylinders)

| Cyl. No. | Speed | r/min | 6 | | 7 | |
|----------|-------|-------|-------------|-------|-------------|-------|
| | | | 750/720 | 900 | 750/720 | 900 |
| A | mm | | 4,859/4,859 | 4,859 | 5,304/5,304 | 5,304 |
| B | mm | | 2,373/2,453 | 2,811 | 2,373/2,811 | 2,811 |
| C | mm | | 7,232/7,312 | 7,670 | 7,677/8,115 | 8,115 |
| H | mm | | 4,242/4,242 | 4,242 | 4,429/4,429 | 4,429 |
| Dry mass | t | | 43.5/43.5 | 43.5 | 49.3/49.3 | 49.3 |

Dimensions (8-9 cylinders)

| Cyl. No. | Speed | r/min | 8 | | 9 | |
|----------|-------|-------|-------------|-------|-------------|-------|
| | | | 750/720 | 900 | 750/720 | 900 |
| A | mm | | 5,749/5,749 | 5,749 | 6,194/6,194 | 6,194 |
| B | mm | | 2,811/2,811 | 2,933 | 2,811/2,881 | 3,128 |
| C | mm | | 8,560/8,560 | 8,682 | 9,005/9,075 | 9,322 |
| H | mm | | 4,429/4,429 | 4,429 | 4,429/4,429 | 4,429 |
| Dry mass | t | | 57.0/57.0 | 57.0 | 63.5/63.5 | 63.5 |

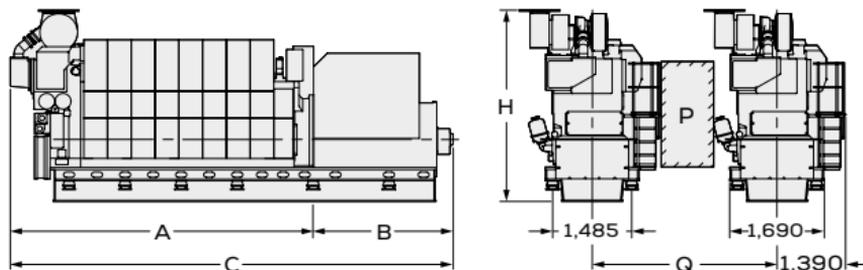¹⁾ Based on nominal generator efficiencies of 96%

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,900 mm (without gallery)
~3,100 mm (with gallery).

Tier III with SCR

Bore: 225 mm, Stroke: 300 mm

| Speed | r/min | 750 | | 720 | | 900 | | | |
|---------------|-------|-------------------|-------|-----------------------|-------|---------|---------|-----------------------|---|
| | | 50 | | 60 | | 60 | | | |
| Frequency | Hz | Eng. kW | | Gen. kW ¹⁾ | | Eng. kW | | Gen. kW ¹⁾ | |
| | | 5L23/30H Mk 3 ECR | | - | - | 500-600 | 475-570 | - | - |
| 5L23/30H Mk 3 | | 885 | 840 | 850 | 810 | - | - | - | - |
| 6L23/30H Mk 3 | | 1,062 | 1,010 | 1,020 | 970 | 1,200 | 1,140 | | |
| 7L23/30H Mk 3 | | 1,239 | 1,180 | 1,190 | 1,130 | 1,400 | 1,330 | | |
| 8L23/30H Mk 3 | | 1,416 | 1,345 | 1,360 | 1,290 | 1,600 | 1,520 | | |
| 9L23/30H Mk 3 | | 1,593 | 1,515 | 1,530 | 1,455 | 1,800 | 1,710 | | |

Dimensions (5-7 cylinders)


| Cyl. No. | r/min | 5 | | 6 | | 7 | |
|----------|-------|---------|---------|---------|-------|---------|-------|
| | | 720 ECR | 750/720 | 750/720 | 900 | 750/720 | 900 |
| A | mm | 3,379 | 3,379 | 3,749 | 3,749 | 4,119 | 4,276 |
| B | mm | 2,202 | 2,202 | 2,252 | 2,252 | 2,302 | 2,302 |
| C | mm | 5,581 | 5,581 | 6,001 | 6,001 | 6,421 | 6,578 |
| H | mm | 2,621 | 2,621 | 2,621 | 2,621 | 2,621 | 2,621 |
| Dry mass | t | 16.8 | 16.8 | 18.4 | 18.6 | 20.7 | 20.7 |

Dimensions (8-9 cylinders)

| Cyl. No. | r/min | 8 | | 9 | |
|----------|-------|---------|-------|---------|-------|
| | | 750/720 | 900 | 750/720 | 900 |
| A | mm | 4,489 | 4,896 | 4,859 | 5,266 |
| B | mm | 2,352 | 2,352 | 2,402 | 2,402 |
| C | mm | 6,841 | 7,248 | 7,261 | 7,668 |
| H | mm | 2,621 | 2,621 | 2,621 | 2,621 |
| Dry mass | t | 22.5 | 22.6 | 24.5 | 24.5 |

¹⁾ Based on nominal generator efficiencies of 95%

Note: Part load optimised – available

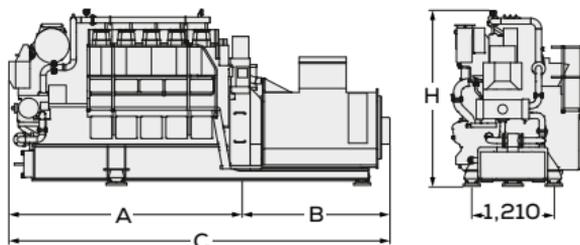

Free passage between the engines, width 600 mm and height 2,000 mm
 Minimum distance between centre of engines: ~2,250 mm (without gallery)
 ~2,600 mm (with gallery)

Bore: 225 mm, Stroke: 300 mm


| Speed | r/min | 750 | | 720 | | 900 | |
|-------------------|-------|---------|-----------------------|---------|-----------------------|---------|-----------------------|
| Frequency | Hz | 50 | | 60 | | 60 | |
| | | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 5L23/30H Mk 2 ECR | | 580 | 550 | 580 | 550 | - | - |
| 5L23/30H Mk 2 | | 675/740 | 640/705 | 650/710 | 620/675 | - | - |
| 6L23/30H Mk 2 | | 888 | 845 | 852 | 810 | 1,050 | 1,000 |
| 7L23/30H Mk 2 | | 1,036 | 985 | 994 | 945 | 1,225 | 1,165 |
| 8L23/30H Mk 2 | | 1,184 | 1,125 | 1,136 | 1,080 | 1,400 | 1,330 |

Dimensions

| Cyl. No. | r/min | 5 | | 6 | | 7 | | 8 | |
|----------|-------|---------|---------|-------|---------|-------|---------|-------|--|
| | | 720/750 | 720/750 | 900 | 720/750 | 900 | 720/750 | 900 | |
| A | mm | 3,379 | 3,749 | 3,749 | 4,119 | 4,276 | 4,489 | 4,896 | |
| B | mm | 2,202 | 2,252 | 2,252 | 2,302 | 2,302 | 2,352 | 2,352 | |
| C | mm | 5,581 | 6,001 | 6,001 | 6,421 | 6,578 | 6,841 | 7,248 | |
| H | mm | 2,621 | 2,621 | 2,621 | 2,621 | 2,621 | 2,621 | 2,621 | |
| Dry mass | t | 16.8 | 18.4 | 18.6 | 20.7 | 20.7 | 22.5 | 22.6 | |

¹⁾ Based on nominal generator efficiencies of 95%

Note: Part load optimised – available

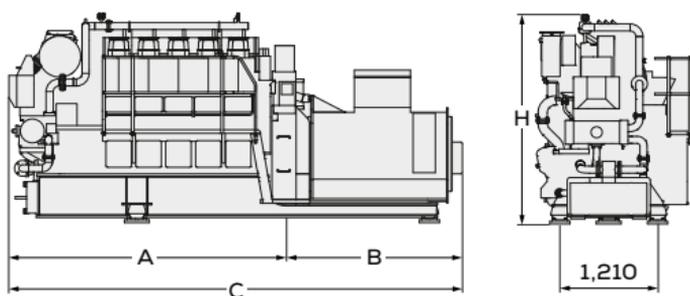

Free passage between the engines, width 600 mm and height 2,000 mm
 Minimum distance between centre of engines: ~2,250 mm (without gallery)
 ~2,600 mm (with gallery)


Tier III in gas mode

Bore: 225 mm, Stroke: 300 mm

| Speed | r/min | 750 | | 720 | | 900 ²⁾ | |
|-----------|-------|---------|-----------------------|---------|-----------------------|-------------------|-----------------------|
| | | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 5L23/30DF | 625 | 625 | 590 | 625 | 590 | - | - |
| 6L23/30DF | 750 | 750 | 710 | 750 | 710 | 990 | 940 |
| 7L23/30DF | 875 | 875 | 830 | 875 | 830 | 1,155 | 1,095 |
| 8L23/30DF | 1,000 | 1,000 | 950 | 1,000 | 950 | 1,320 | 1,255 |
| 9L23/30DF | - | - | - | - | - | - | - |

Dimensions

| Cyl. No. | r/min | 5 | 6 | 6 | 7 | 7 | 8 | 8 |
|----------|-------|---------|---------|-------|---------|-------|---------|-------|
| | | 720/750 | 720/750 | 900 | 720/750 | 900 | 720/750 | 900 |
| A | mm | 3,469 | 3,839 | 3,839 | 4,209 | 4,276 | 4,579 | 4,896 |
| B | mm | 2,202 | 2,252 | 2,252 | 2,302 | 2,302 | 2,352 | 2,352 |
| C | mm | 5,671 | 6,091 | 6,091 | 6,511 | 6,578 | 6,931 | 7,241 |
| H | mm | 2,749 | 2,749 | 2,749 | 2,749 | 2,749 | 2,749 | 2,749 |
| Dry mass | t | 17.3 | 19.0 | 19.2 | 21.4 | 21.4 | 23.3 | 23.4 |

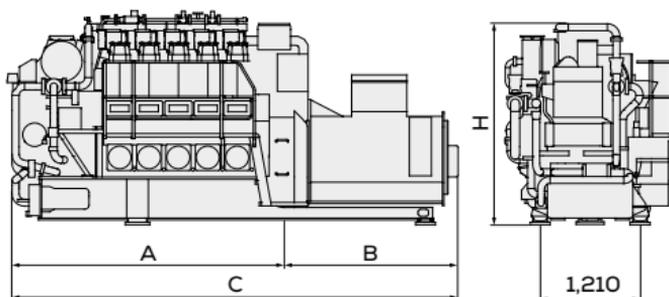¹⁾ Based on nominal generator efficiencies of 95%.²⁾ The 900 rpm version is only approved for Aux. GenSet application. For Diesel-Electric Propulsion, please contact Everlence.
Gas methane number ≥ 80 .

Free passage between the engines, width 600 mm and height 2,000 mm
 Minimum distance between centre of engines: ~2,250 mm (without gallery)
 ~2,600 mm (with gallery)

Bore: 210 mm, Stroke: 310 mm

| Speed | r/min | 1,000 | | 900 | |
|--------------|-------|---------|-----------------------|---------|-----------------------|
| | Hz | 50 | | 60 | |
| Frequency | Hz | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 5L21/31 Mk 2 | | 1,000 | 950 | 1,000 | 950 |
| 6L21/31 Mk 2 | | 1,320 | 1,255 | 1,320 | 1,255 |
| 7L21/31 Mk 2 | | 1,540 | 1,465 | 1,540 | 1,465 |
| 8L21/31 Mk 2 | | 1,760 | 1,675 | 1,760 | 1,675 |
| 9L21/31 Mk 2 | | 1,980 | 1,880 | 1,980 | 1,880 |

* Refer to page 162 for further information

Dimensions (1 bearing)



| Cyl. No. | | 5 | | 6 | | 7 | |
|----------|----|-------|-------|-------|-------|-------|-------|
| | | r/min | 900 | 1,000 | 900 | 1,000 | 900 |
| A | mm | 3,504 | 3,504 | 3,859 | 3,859 | 4,214 | 4,214 |
| B | mm | 1,995 | 1,995 | 2,047 | 2,047 | 2,027 | 2,027 |
| C | mm | 5,499 | 5,499 | 5,906 | 5,906 | 6,241 | 6,241 |
| H | mm | 3,074 | 3,074 | 3,161 | 3,161 | 3,161 | 3,161 |
| Dry mass | t | 22.2 | 22.2 | 25.7 | 25.7 | 29.2 | 29.2 |

Dimensions (2 bearings)

| Cyl. No. | | 5 | | 6 | | 7 | | 8 | | 9 | |
|----------|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | r/min | 900 | 1,000 | 900 | 1,000 | 900 | 1,000 | 900 | 1,000 | 900 |
| A | mm | 3,504 | 3,504 | 3,859 | 3,859 | 4,214 | 4,214 | 4,569 | 4,624 | 4,979 | 4,979 |
| B | mm | 2,545 | 2,545 | 2,597 | 2,597 | 2,577 | 2,577 | 2,577 | 2,577 | 2,657 | 2,657 |
| C | mm | 6,049 | 6,049 | 6,456 | 6,456 | 6,791 | 6,791 | 7,146 | 7,201 | 7,636 | 7,636 |
| H | mm | 3,074 | 3,074 | 3,161 | 3,161 | 3,161 | 3,161 | 3,161 | 3,267 | 3,267 | 3,267 |
| Dry mass | t | 22.2 | 22.2 | 25.7 | 25.7 | 29.2 | 29.2 | 32.7 | 32.7 | 36.2 | 36.2 |

¹⁾ Based on nominal generator efficiencies of 95%

Note: Part load optimised - available

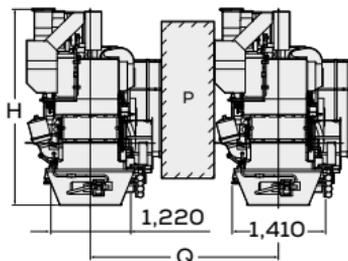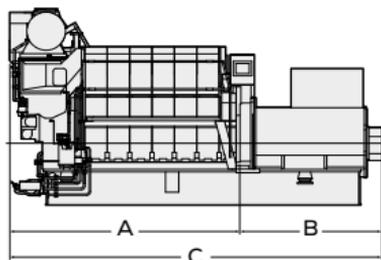

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,500 mm (without gallery)
~2,700 mm (with gallery).

Tier III with SCR

Bore: 210 mm, Stroke: 310 mm

| Speed | r/min | 1,000 | | 900 | |
|-------------|-------|---------|-----------------------|---------|-----------------------|
| | Hz | 50 | | 60 | |
| Frequency | Hz | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| 5L21/31DF-M | | 1,000 | 950 | 1,000 | 950 |
| 6L21/31DF-M | | 1,320 | 1,255 | 1,320 | 1,255 |
| 7L21/31DF-M | | 1,540 | 1,465 | 1,540 | 1,465 |
| 8L21/31DF-M | | 1,760 | 1,675 | 1,760 | 1,675 |
| 9L21/31DF-M | | 1,980 | 1,880 | 1,980 | 1,880 |

Dimensions (1 bearing)



| Cyl. No. | r/min | 5 | 5 | 6 | 6 | 7 | 7 |
|----------|-------|-------|-------|-------|-------|-------|-------|
| | | 900 | 1,000 | 900 | 1,000 | 900 | 1,000 |
| A | mm | 3,504 | 3,504 | 3,859 | 3,859 | 4,214 | 4,214 |
| B | mm | 1,995 | 1,995 | 2,047 | 2,047 | 2,027 | 2,027 |
| C | mm | 5,499 | 5,499 | 5,906 | 5,906 | 6,241 | 6,241 |
| H | mm | 3,074 | 3,074 | 3,161 | 3,161 | 3,161 | 3,161 |
| Dry mass | t | 22.2 | 22.2 | 25.7 | 25.7 | 29.2 | 29.2 |

Dimensions (2 bearings)

| Cyl. No. | r/min | 5 | 5 | 6 | 6 | 7 | 7 | 8 | 8 | 9 | 9 |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | 900 | 1,000 | 900 | 1,000 | 900 | 1,000 | 900 | 1,000 | 900 | 1,000 |
| A | mm | 3,504 | 3,504 | 3,859 | 3,859 | 4,214 | 4,214 | 4,569 | 4,624 | 4,979 | 4,979 |
| B | mm | 2,545 | 2,545 | 2,597 | 2,597 | 2,577 | 2,577 | 2,577 | 2,577 | 2,657 | 2,657 |
| C | mm | 6,049 | 6,049 | 6,456 | 6,456 | 6,791 | 6,791 | 7,146 | 7,201 | 7,636 | 7,636 |
| H | mm | 3,074 | 3,074 | 3,161 | 3,161 | 3,161 | 3,161 | 3,161 | 3,267 | 3,267 | 3,267 |
| Dry mass | t | 22.2 | 22.2 | 25.7 | 25.7 | 29.2 | 29.2 | 32.7 | 32.7 | 36.2 | 36.2 |

¹⁾ Based on nominal generator efficiencies of 95%

Note: Part load optimised – available

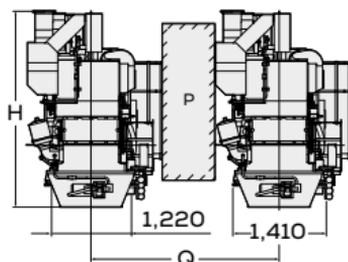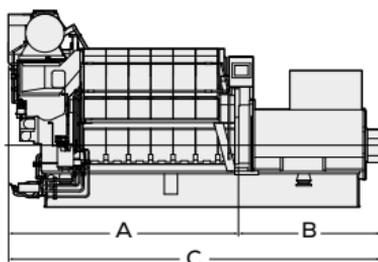

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,500 mm (without gallery)
~2,700 mm (with gallery).

Bore: 175 mm, **Stroke:** 215 mm, **Cylinders:** 12

| Engine model | Rating def. | kWm | kWe ¹⁾ | rpm (frequency) | SFOC at 100% MCR Tier II/Tier III |
|----------------------------|-----------------|-------|-------------------|------------------------|---|
| | | | | | g/kWh |
| Electric propulsion | | | | | |
| 12V175D-MEM | Medium duty | 1,440 | 1,382 | 1,500 (50 Hz) | 184/185 |
| | | 1,620 | 1,555 | 1,500 (50 Hz) | 183/184 |
| | | 1,800 | 1,728 | 1,800 (60 Hz) | 190/191 |
| | | 1,920 | 1,843 | 1,800 (60 Hz) | 190.5/190.5 |
| 12V175D-MEL | Light duty | 1,800 | 1,728 | 1,500 (50 Hz) | 186/187 |
| | | 1,980 | 1,901 | 1,500 (50 Hz) | 186/187 |
| | | 2,100 | 2,016 | 1,800 (60 Hz) | 191/192 |
| | | 2,280 | 2,189 | 1,800 (60 Hz) | 192/193 |
| 12V175D-MEV | Variable Speed | 1,860 | 1,786 | 1,080-1,800 (36-60 Hz) | 191/192 |
| | | 2,040 | 1,958 | 1,080-1,800 (36-60 Hz) | 190/191 |
| | | 2,280 | 2,189 | 1,080-1,800 (36-60 Hz) | 192/193 |
| Auxiliary power | | | | | |
| 12V175D-MA | Auxiliary power | 1,620 | 1,555 | 1,500 (50 Hz) | 183/184 |
| | | 1,800 | 1,728 | 1,500 (50 Hz) | 185.5/186 |
| | | 1,980 | 1,901 | 1,500 (50 Hz) | 186/187.5 |
| | | 1,920 | 1,843 | 1,800 (60 Hz) | 190.5/190.5 |
| | | 2,100 | 2,016 | 1,800 (60 Hz) | 191/192 |
| | | 2,280 | 2,189 | 1,800 (60 Hz) | 192/193 |

¹⁾ 3-phase, 0.8 p.f., assumes alternator efficiency of 96.0%.

Specific fuel oil consumption related to mechanical output acc. to ISO 3046-1:2002 based on a lower calorific value of fuel 42,700 kJ/kg with attached lube oil, HT and LT-cooling water pumps fulfilling IMO Tier II/Tier III emission limits with 5% tolerance.

* Refer to page 162 for further information


Rating definitions:

| | |
|---|-----------------------------|
| Marine electric propulsion medium duty | Average load: up to 75%/50% |
| Marine electric propulsion light duty | Average load: up to 50% |
| Marine electric propulsion, variable speed | Average load: up to 75%/50% |
| Marine auxiliary | Average load: up to 50% |

Dimensions

| | | |
|----------------------|-----------|-------|
| L | mm | 5,140 |
| L₁ | mm | 4,900 |
| H | mm | 2,555 |
| W | mm | 1,880 |
| Dry weight | t | 19.0 |

Weight and dimensions are subject to confirmation and have to be adjusted acc. to the various configuration possibilities. Please request installation drawings for planning purposes.

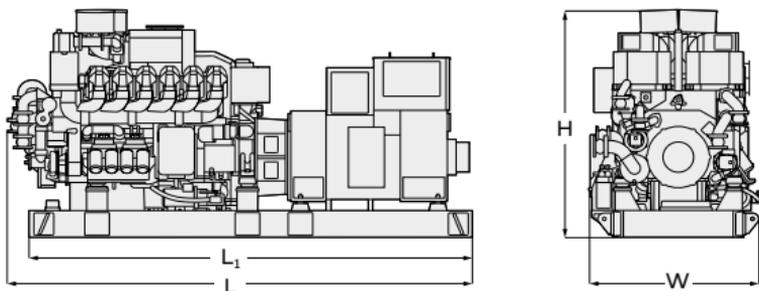

Bore: 175 mm, **Stroke:** 215 mm, **Cylinder:** 16

| Engine model | Rating def. | kWm | kWe ¹⁾ | rpm (frequency) | SFOC at 100% MCR Tier II/Tier III |
|--------------------|-----------------|-------|-------------------|------------------------|---|
| | | | | | g/kWh |
| 16V175D-MEM | Electric | 2,160 | 2,074 | 1,500 (50 Hz) | 183.0/185.0 |
| | Propulsion | 2,400 | 2,304 | 1,800 (60 Hz) | 190.0/192.0 |
| | Medium duty | 2,560 | 2,458 | 1,800 (60 Hz) | 190.5/191.5 |
| 16V175D-MEL | Electric | 2,400 | 2,304 | 1,500 (50 Hz) | 186.0/187.0 |
| | Propulsion | 2,640 | 2,534 | 1,500 (50 Hz) | 186.5/187.5 |
| | Light | 2,800 | 2,688 | 1,800 (60 Hz) | 191.0/192.0 |
| | Duty | 2,960 | 2,842 | 1,800 (60 Hz) | 194.0/195.0 |
| 16V175D-MEV | Electric | 2,480 | 2,381 | 1,080-1,800 (36-60 Hz) | 191.0/193.0 |
| | Propulsion | 2,720 | 2,611 | 1,080-1,800 (36-60 Hz) | 191.0/193.0 |
| | Variable speed | 2,960 | 2,842 | 1,080-1,800 (36-60 Hz) | 194.5/195.0 |
| 16V175D-MA | Auxiliary power | 2,400 | 2,304 | 1,800 (60 Hz) | 190.0/192.0 |

¹⁾ 3-phase, 0.8 p.f., assumes alternator efficiency of 96.0%.

Specific fuel oil consumption related to mechanical output acc. to ISO 3046-1:2002 based on a lower calorific value of fuel 42,700 kJ/kg with attached lube oil, HT and LT-cooling water pumps fulfilling IMO Tier II/Tier III emission limits with 5% tolerance.

* Refer to page 162 for further information



Rating definitions

| | |
|---|-----------------------------|
| Marine electric propulsion medium duty | Average load: up to 75%/50% |
| Marine electric propulsion light duty | Average load: up to 50% |
| Marine electric propulsion, variable speed | Average load: up to 75%/50% |
| Marine auxiliary | Average load: up to 75% |

Dimensions

| | | |
|----------------------|-----------|-------|
| L | mm | 5,780 |
| L₁ | mm | 5,500 |
| H | mm | 2,575 |
| W | mm | 1,880 |
| Dry weight | t | 22.65 |

Weight and dimensions are subject to confirmation and have to be adjusted acc. to the various configuration possibilities. Please request installation drawings for planning purposes.

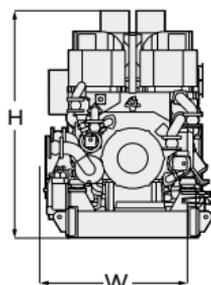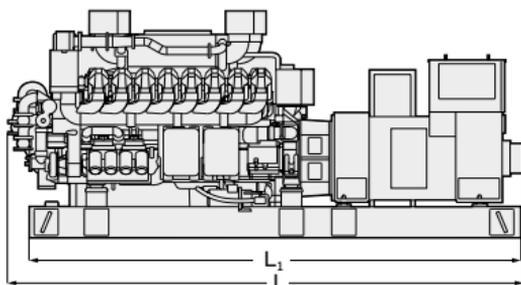

Bore: 175 mm, **Stroke:** 215 mm, **Cylinder:** 20

| Engine model | Rating def. | kW _m | kW _e ¹⁾ | rpm (frequency) | SFOC at |
|--------------------|----------------|-----------------|-------------------------------|------------------------|------------------------------|
| | | | | | 100% MCR Tier II/Tier III |
| | | | | | g/kWh |
| 20V175D-MEM | Electric | 2,700 | 2,592 | 1,500 (50 Hz) | 183.0/184.5 |
| | Propulsion | 3,000 | 2,880 | 1,800 (60 Hz) | 190.0/191.0 |
| | Medium duty | 3,200 | 3,072 | 1,800 (60 Hz) | 190.5/190.5 |
| 20V175D-MEL | Electric | 3,000 | 2,880 | 1,500 (50 Hz) | 186.0/187.0 |
| | Propulsion | 3,300 | 3,168 | 1,500 (50 Hz) | 186.5/187.5 |
| | Light | 3,500 | 3,360 | 1,800 (60 Hz) | 191.0/192.0 |
| | Duty | 3,800 | 3,648 | 1,800 (60 Hz) | 192.0/193.0 |
| 20V175D-MEV | Electric | 3,100 | 2,976 | 1,080-1,800 (36-60 Hz) | 191.0/192.0 |
| | Propulsion | 3,400 | 3,264 | 1,080-1,800 (36-60 Hz) | 190.0/191.0 |
| | Variable speed | 3,800 | 3,648 | 1,080-1,800 (36-60 Hz) | 192.0/193.0 |

¹⁾ 3-phase, 0.8 p.f., assumes alternator efficiency of 96.0%.

Specific fuel oil consumption related to mechanical output acc. to ISO 3046-1:2002 based on a lower calorific value of fuel 42,700 kJ/kg with attached lube oil, HT and LT-cooling water pumps fulfilling IMO Tier II/Tier III emission limits with 5% tolerance.

* Refer to page 162 for further information



Rating definitions

| | |
|---|-----------------------------|
| Marine electric propulsion medium duty | Average load: up to 75%/50% |
| Marine electric propulsion light duty | Average load: up to 50% |
| Marine electric propulsion, variable speed | Average load: up to 75%/50% |

Dimensions

| | | |
|----------------------|-----------|-------|
| L | mm | 6,300 |
| L₁ | mm | 6,000 |
| H | mm | 2,555 |
| W | mm | 1,980 |
| Dry weight | t | 26.8 |

Weight and dimensions are subject to confirmation and have to be adjusted acc. to the various configuration possibilities. Please request installation drawings for planning purposes.

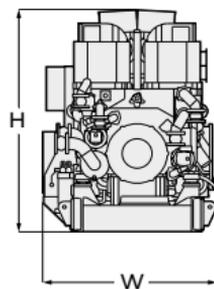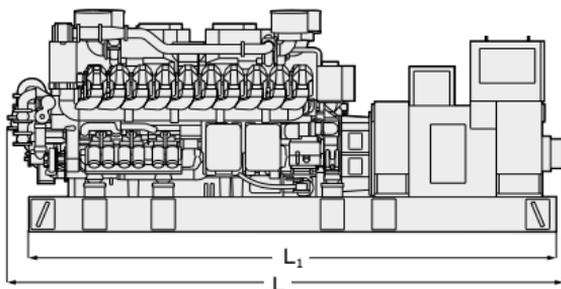



S.E.M.T. Pielstick
four-stroke
propulsion
engines



S.E.M.T. Pielstick PA4 SM & SMDS

GenSet

Bore: 200 mm, **Stroke:** 210 mm

| | | |
|---------------------------------------|--------------|--------------|
| Speed | r/min | 1,300 |
| Rated power output | | kW |
| 8 PA4 V 200 SM¹⁾ | | 700 |
| 12 PA4 V 200 SMDS²⁾ | | 1,330 |

| | | | |
|------------|------------|-----------------------|--------------------------|
| | | 8 PA4 V 200 SM | 12 PA4 V 200 SMDS |
| mep | bar | 12.2 | 15.5 |

Specific fuel oil consumption (SFOC) to ISO conditions

| | | | |
|--------------------------|-----------------|-----------------|----------------|
| Engine rating | MCR 110% | MCR 100% | MCR 85% |
| 8 PA4 V 200 SM | | | On demand |
| 12 PA4 V 200 SMDS | | | On demand |

Dimensions³⁾

| | | | |
|--------------------|-----------|-----------------------|--------------------------|
| Engine type | | 8 PA4 V 200 SM | 12 PA4 V 200 SMDS |
| A | mm | 1,515 | 2,140 |
| B | mm | 2,350 | 3,120 |
| C | mm | 1,785 | 2,085 |
| D | mm | 1,470 | 1,670 |
| Dry mass | t | 8 | 10 |


All dimensions and masses are approximate and subject to change without prior notice.

For detailed information, please contact Everllence.

¹⁾ Power in surface conditions according to the "rules for the classification of naval submarines" guideline from Bureau Veritas

²⁾ Power in snorkel conditions according to the "rules for the classification of naval submarines" guideline from Bureau Veritas

³⁾ Without generator

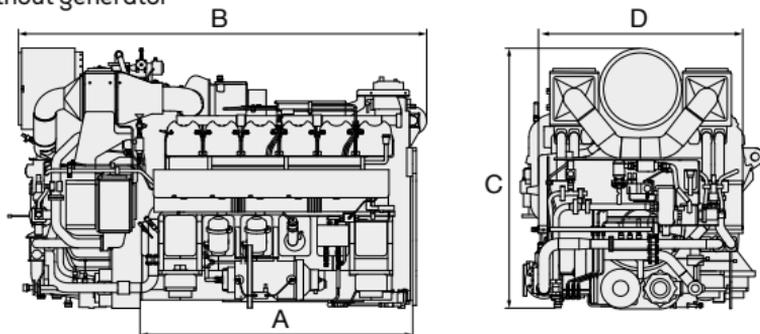

Tier III with SCR

Bore: 280 mm, **Stroke:** 330 mm

| | | Standard engine | Load profile 'Navy' |
|---------------------------|--------------|------------------------|---------------------|
| Speed | r/min | 1,050 | 1,084 |
| mep | bar | 22.8 | 24.3 |
| Rated power output | | kW¹⁾ | - ICFN kW |
| 12PA6 B STC | | 4,860 | 5,346 |
| 16PA6 B STC | | 6,480 | 7,128 |
| 20PA6 B STC | | 8,100 | 8,910 |

Specific fuel oil consumption (SFOC) to ISO conditions

| Engine rating | ICFN stop power | MCR 100% | MCR 85% |
|---------------------|-----------------|-----------|-----------|
| Load profile 'Navy' | 213 g/kWh | 205 g/kWh | 200 g/kWh |

Specific lube oil consumption¹⁾: 0.7 g/kWh.

Figures on theoretical propeller curve for distillates according to ISO 8217 DMA, with all attached pumps.


ICFN, 1 hour every 6 operating hours

Dimensions

| Cyl. No. | | 12 | 16 | 20 |
|-----------------|-----------|-------|-------|-------|
| L | mm | 6,035 | 6,948 | 8,167 |
| W | mm | 2,444 | 2,444 | 2,714 |
| H | mm | 3,170 | 3,170 | 3,620 |
| Dry mass | t | 31 | 37 | 43 |

Engine fuel: distillate according to ISO 8217 DMX to DMB. Capabilities with JP-5 and bio-fuel.

Shock qualified.

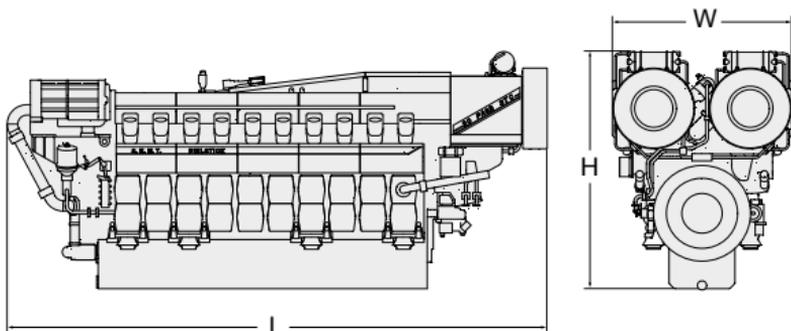¹⁾ Related to 100% actual engine load.

S.E.M.T. Pielstick PA6 B

GenSet for electric propulsion

Tier II Tier III

Tier III with SCR

Bore: 280 mm, **Stroke:** 330 mm

| Speed | r/min | 1,000 | | 900 | |
|------------------|-----------|---------|-----------------------|---------|-----------------------|
| | | Eng. kW | Gen. kW ¹⁾ | Eng. kW | Gen. kW ¹⁾ |
| Frequency | Hz | | 50 | | 60 |
| 12PA6 B | | 4,440 | 4,307 | 4,200 | 4,074 |
| 16PA6 B | | 5,920 | 5,742 | 5,600 | 5,432 |
| 18PA6 B | | 6,660 | 6,460 | 6,300 | 6,111 |
| 20PA6 B | | 7,400 | 7,178 | 7,000 | 6,790 |

Specific fuel oil consumption (SFOC) to ISO conditions

| Engine rating | MCR 110% | MCR 100% | MCR 85% |
|------------------------|-----------|-----------|-----------|
| Frequency 50 Hz | 204 g/kWh | 200 g/kWh | 198 g/kWh |
| Frequency 60 Hz | 204 g/kWh | 199 g/kWh | 197 g/kWh |

Figures at constant speed for theoretical propeller curve for distillates according to ISO 8217 DMA, with all attached pumps.

Dimensions²⁾

| Cyl. No. | | 12 | 16 | 18 | 20 |
|------------------------------|----|-------|--------|--------|--------|
| A | mm | 4,370 | 4,727 | 4,732 | 4,770 |
| B | mm | 4,600 | 5,637 | 6,097 | 6,557 |
| C | mm | 9,287 | 10,583 | 11,048 | 11,547 |
| H | mm | 3,695 | 3,695 | 3,695 | 3,695 |
| E | mm | 2,670 | 2,670 | 2,670 | 2,670 |
| Dry mass³⁾ | t | 60 | 72 | 80 | 85 |


¹⁾ Nominal generator efficiencies: 97%.

²⁾ Dimensions are based on operation under inclination up to 25 degrees in any direction.

³⁾ Incl. 5% tolerance, weight may vary due to different configurations.

Engine fuel: distillate according to ISO 8217 DMX to DMB. Capabilities with JP-5 and bio-fuel.

Engine rating: engine suitable for 110% overload during 1 hour every 12 operating hours. Shock qualified.

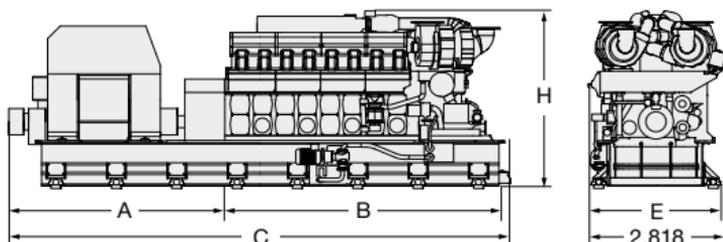

Tier III with SCR

Bore: 400 mm, **Stroke:** 500 mm

| | | Standard engine | Load profile 'Navy' |
|---------------------------|--------------|-----------------|---------------------|
| Speed | r/min | 600 | 619 |
| mep | bar | 23.9 | 25.5 |
| Rated power output | | kW | - ICFN kW |
| 12PC2.6 B | | 9,000 | 9,900 |
| 14PC2.6 B | | 10,500 | 11,550 |
| 16PC2.6 B | | 12,000 | 13,200 |
| 18PC2.6 B | | 13,500 | 14,850 |

Specific fuel oil consumption (SFOC) to ISO conditions

| Engine rating | ICFN stop power | MCR 100% | MCR 85% |
|--------------------------------|-----------------|-----------|-----------|
| PC2-6 B Standard Engine | On demand | 185 g/kWh | 179 g/kWh |

Specific lube oil consumption¹⁾: 1.2 g/kWh

Figures on theoretical propeller curve for distillates according to ISO 8217 DMA, with all attached pumps.

ICFN 1 hour every 6 operating hours


Dimensions

| Cyl. No. | | 12 | 14 | 16 | 18 |
|----------------------|-----------|-------|-------|-------|--------|
| L | mm | 8,247 | 8,987 | 9,727 | 10,467 |
| L₁ | mm | 5,960 | 6,700 | 7,440 | 8,180 |
| W | mm | 3,674 | 3,674 | 3,674 | 3,674 |
| H | mm | 4,794 | 4,794 | 4,794 | 4,794 |
| Dry mass | t | 94 | 104 | 114 | 123 |

Engine fuel: distillate according to ISO 8217 DMX to DMB.

Capabilities with JP-5 and heavy fuel oil.

Shock qualified.

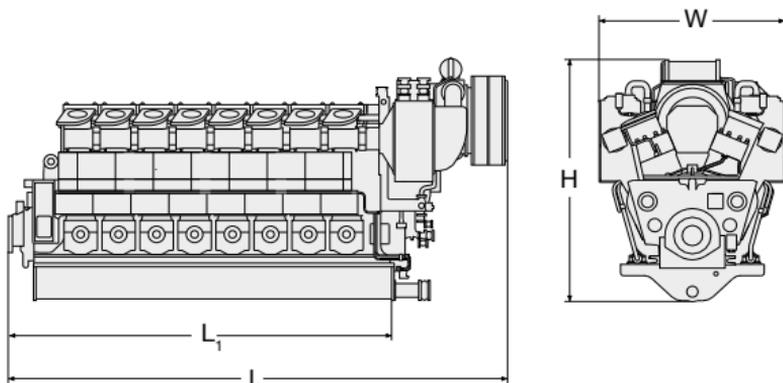¹⁾ Related to 100% actual



Everllence
four-stroke
propulsion
systems



Alpha

Propeller programme – FPP and CPP

The Alpha FPP (fixed pitch propeller) portfolio covers:

- power range of 4-50 MW per shaft
- blade configurations for 3-, 4-, 5- and 6-bladed propellers
- propellers with integrated shaft line and stern tube solutions
- a wide range of stern tube lube and sealing systems
 - oil, water, biodegradable oils

The Alpha FPPs are characterised by the following benefits:


- High-efficient, hydrodynamically optimised blade profiles
 - Kappel designs available
- High reliability: robust approach with ample mechanical design margins
- High-efficient aft ship integration with rudder, rudder bulb, ducts, etc.
- Layouts for complete propulsion systems
- Plant calculations with upfront consideration to torsional vibration calculation (TVC), alignment and control systems

Alpha CPP (controllable pitch propeller)

- As standard Mk 5 versions are 4-bladed – optionally 3- and 5-bladed propellers are available on request
- The figures stated after VBS indicate the propeller hub diameter
- Standard blade/hub materials are Ni-Al-bronze, stainless steel is optional
- The propellers are available up to the highest ice classes. However the standard programme, is based on 'no ice'
- A wide range of stern tube lube and sealing systems are offered for oil, water and biodegradable oils.

Alpha

Four-stroke propulsion system installation

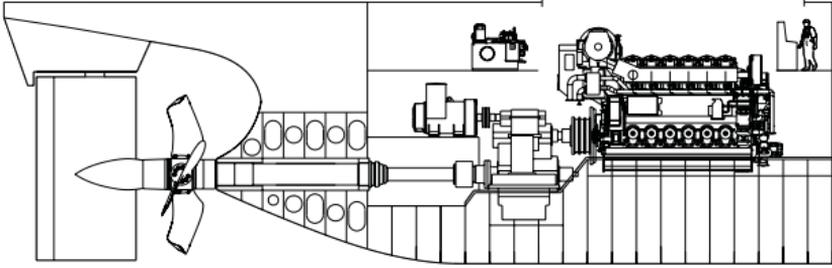

Complete powertrain with propeller and aft ship equipment.

The hydrodynamic edge

In the complex hydrodynamic entity embracing hull, propeller, and rudder - our CFD-based software masters the holistic approach of customised blade and rudder bulb designs.


We perform 'Resistance calculations' and 'Calculations of wake field', which form the basis for the following:

- Final propeller design
- Self-propulsion calculations
- Cavitation extent calculations
- Propeller-induced pressure impulses and CIS (cavitation inception speed)

Save the 'stock propeller test'; save time and save money.

With EcoBulb rudder bulb and propeller hub fairing cone installed, uniform flow without separation creates improved thrust ahead, and less power is required.

CFD model with streamlines and surface pressure distribution.

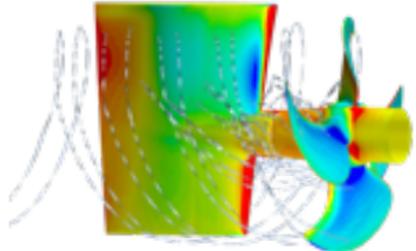

Everllence standard package examples

| Cyl. | kW | Prop. speed r/min | D mm | Hub VBS mm | Q mm | R mm | Wmin mm | Prop. mass t ¹⁾ |
|-----------------|--------|----------------------|---------|------------------|---------|---------|------------|-------------------------------|
| L51/60DF | | | | | | | | |
| 6 | 6,900 | 161 | 4,250 | 1,100 | 851 | 935 | 1,650 | 17.9 |
| 6 | 6,900 | 103 | 5,600 | 1,260 | 972 | 1,052 | 1,698 | 28.1 |
| 6 | 6,900 | 133 | 4,800 | 1,180 | 914 | 1,004 | 1,698 | 22.4 |
| 7 | 8,050 | 160 | 4,400 | 1,180 | 914 | 1,004 | 1,698 | 21.5 |
| 7 | 8,050 | 133 | 5,000 | 1,260 | 972 | 1,052 | 1,698 | 26.1 |
| 7 | 8,050 | 104 | 5,850 | 1,350 | 1,037 | 1,111 | 1,738 | 32.1 |
| 8 | 9,200 | 157 | 4,550 | 1,260 | 972 | 1,052 | 1,698 | 25.1 |
| 8 | 9,200 | 132 | 5,150 | 1,350 | 1,037 | 1,111 | 1,738 | 29.5 |
| 8 | 9,200 | 103 | 6,000 | 1,450 | 1,114 | 1,163 | 1,778 | 36.8 |
| 9 | 10,350 | 154 | 4,700 | 1,350 | 1,037 | 1,111 | 1,698 | 27.7 |
| 9 | 10,350 | 130 | 5,300 | 1,350 | 1,037 | 1,111 | 1,778 | 32.0 |
| 9 | 10,350 | 102 | 6,200 | 1,450 | 1,114 | 1,178 | 1,831 | 39.6 |

L49/60DF

| | | | | | | | | |
|----|--------|-----|-------|-------|-------|-------|-------|---|
| 6 | 7,800 | 169 | 4,350 | 1,100 | 851 | 962 | 1,700 | - |
| 6 | 7,800 | 142 | 4,900 | 1,180 | 914 | 1,014 | 1,700 | - |
| 6 | 7,800 | 122 | 5,700 | 1,350 | 1,027 | 1,035 | 1,750 | - |
| 7 | 9,100 | 167 | 4,500 | 1,180 | 914 | 1,014 | 1,700 | - |
| 7 | 9,100 | 139 | 5,100 | 1,260 | 972 | 1,223 | 1,700 | - |
| 7 | 9,100 | 111 | 5,900 | 1,450 | 1,127 | 1,197 | 1,800 | - |
| 8 | 10,400 | 164 | 4,650 | 1,180 | 914 | 1,034 | 1,700 | - |
| 8 | 10,400 | 138 | 5,250 | 1,350 | 1,027 | 1,040 | 1,750 | - |
| 8 | 10,400 | 110 | 6,100 | 1,450 | 1,127 | 1,197 | 1,800 | - |
| 9 | 11,700 | 159 | 4,850 | 1,260 | 972 | 1,233 | 1,750 | - |
| 9 | 11,700 | 135 | 5,450 | 1,350 | 1,027 | 1,100 | 1,750 | - |
| 9 | 11,700 | 108 | 6,300 | 1,550 | 1,175 | 1,236 | 1,900 | - |
| 10 | 13,000 | 162 | 4,900 | 1,350 | 1,027 | 1,080 | 1,750 | - |
| 10 | 13,000 | 136 | 5,500 | 1,450 | 1,122 | 1,197 | 1,800 | - |
| 10 | 13,000 | 109 | 6,400 | 1,550 | 1,175 | 1,256 | 1,900 | - |


¹⁾ S_{min} and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube

Everlence standard package examples

| Cyl. | kW | Prop. speed r/min | D mm | Hub VBS mm | Q mm | R mm | W _{min} mm | Prop. mass t ¹⁾ |
|-----------------|--------|----------------------|---------|------------------|---------|---------|------------------------|-------------------------------|
| V49/60DF | | | | | | | | |
| 12 | 15,600 | 161 | 5,100 | 1,450 | 1,122 | 1,197 | 1,800 | - |
| 12 | 15,600 | 133 | 5,750 | 1,550 | 1,175 | 1,236 | 1,900 | - |
| 12 | 15,600 | 106 | 6,750 | 1,640 | 1,260 | 1,288 | 1,950 | - |
| 14 | 18,200 | 164 | 5,200 | 1,450 | 1,122 | 1,227 | 1,800 | - |
| 14 | 18,200 | 131 | 5,950 | 1,550 | 1,175 | 1,256 | 1,900 | - |
| 14 | 18,200 | 104 | 7,000 | 1,730 | 1,330 | 1,339 | 3,000 | - |

| | | | | | | | | |
|-----------------|--------|-----|-------|-------|-------|-------|-------|------|
| V48/60CR | | | | | | | | |
| 12 | 14,400 | 166 | 4,950 | 1,450 | 1,114 | 1,163 | 1,778 | 33.2 |
| 12 | 14,400 | 136 | 5,600 | 1,550 | 1,187 | 1,223 | 1,831 | 39.6 |
| 12 | 14,400 | 107 | 6,600 | 1,730 | 1,424 | 1,332 | 1,881 | 51.9 |
| 14 | 16,800 | 167 | 5,100 | 1,550 | 1,187 | 1,223 | 1,778 | 37.4 |
| 14 | 16,800 | 132 | 5,850 | 1,640 | 1,295 | 1,281 | 1,881 | 45.9 |
| 14 | 16,800 | 105 | 6,850 | 1,730 | 1,424 | 1,332 | 1,913 | 57.5 |
| 16 | 19,200 | 166 | 5,250 | 1,640 | 1,295 | 1,281 | 1,831 | 41.7 |
| 16 | 19,200 | 131 | 6,050 | 1,730 | 1,424 | 1,332 | 1,913 | 52.5 |
| 16 | 19,200 | 103 | 7,100 | 1,810 | 1,553 | 1,412 | 1,966 | 65.5 |

¹⁾ S_{min} and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube

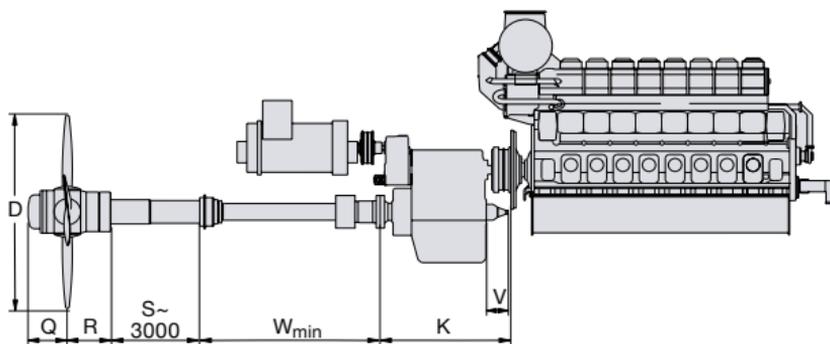

Everllence standard package examples

| Cyl. | kW | Prop. speed r/min | D mm | Hub VBS mm | Q mm | R mm | Wmin mm | Prop. mass t ¹⁾ |
|-----------------|--------|----------------------|---------|------------------|---------|---------|------------|-------------------------------|
| L48/60CR | | | | | | | | |
| 6 | 7,200 | 172 | 4,250 | 1,180 | 914 | 979 | 1,650 | 18.5 |
| 6 | 7,200 | 112 | 5,600 | 1,260 | 972 | 1,052 | 1,698 | 27.4 |
| 6 | 7,200 | 143 | 4,800 | 1,180 | 914 | 1,004 | 1,698 | 21.8 |
| 7 | 8,400 | 169 | 4,400 | 1,180 | 914 | 1,004 | 1,698 | 21.1 |
| 7 | 8,400 | 141 | 5,000 | 1,260 | 972 | 1,052 | 1,698 | 25.8 |
| 7 | 8,400 | 110 | 5,850 | 1,350 | 1,037 | 1,111 | 1,738 | 31.7 |
| 8 | 9,600 | 167 | 4,550 | 1,260 | 972 | 1,052 | 1,698 | 24.7 |
| 8 | 9,600 | 139 | 5,150 | 1,350 | 1,037 | 1,111 | 1,698 | 28.6 |
| 8 | 9,600 | 110 | 6,000 | 1,450 | 1,114 | 1,163 | 1,778 | 35.7 |
| 9 | 10,800 | 165 | 4,700 | 1,350 | 1,037 | 1,111 | 1,698 | 27.2 |
| 9 | 10,800 | 137 | 5,300 | 1,450 | 1,114 | 1,163 | 1,778 | 33.3 |
| 9 | 10,800 | 108 | 6,200 | 1,450 | 1,114 | 1,178 | 1,778 | 38.4 |

L35/44DF


| | | | | | | | | |
|----|-------|-----|-------|-------|-----|-----|-------|------|
| 6 | 3,180 | 208 | 3,300 | 790 | 639 | 704 | 1,401 | 8.4 |
| 6 | 3,180 | 167 | 3,800 | 860 | 686 | 739 | 1,401 | 10.2 |
| 6 | 3,180 | 130 | 4,400 | 940 | 735 | 813 | 1,522 | 12.4 |
| 7 | 3,710 | 198 | 3,500 | 860 | 686 | 739 | 1,401 | 9.9 |
| 7 | 3,710 | 161 | 4,000 | 940 | 735 | 813 | 1,522 | 12.0 |
| 7 | 3,710 | 128 | 4,600 | 1,020 | 795 | 859 | 1,557 | 14.3 |
| 8 | 4,240 | 197 | 3,600 | 940 | 735 | 793 | 1,522 | 11.5 |
| 8 | 4,240 | 165 | 4,050 | 940 | 735 | 813 | 1,522 | 12.6 |
| 8 | 4,240 | 127 | 4,750 | 1,020 | 795 | 894 | 1,629 | 16.0 |
| 9 | 4,770 | 202 | 3,600 | 940 | 735 | 813 | 1,522 | 11.7 |
| 9 | 4,770 | 167 | 4,100 | 1,020 | 795 | 859 | 1,557 | 13.8 |
| 9 | 4,770 | 130 | 4,800 | 1,100 | 851 | 935 | 1,629 | 17.5 |
| 10 | 5,300 | 199 | 3,700 | 1,020 | 795 | 859 | 1,522 | 12.9 |
| 10 | 5,300 | 166 | 4,200 | 1,020 | 795 | 859 | 1,557 | 14.7 |
| 10 | 5,300 | 126 | 5,000 | 1,100 | 851 | 935 | 1,650 | 18.7 |

¹⁾ S_{min} and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube

Everlence standard package examples

| Cyl. | kW | Prop. speed r/min | D mm | Hub VBS mm | Q mm | R mm | W _{min} mm | Prop. mass t ¹⁾ |
|-----------------|--------|----------------------|---------|------------------|---------|---------|------------------------|-------------------------------|
| V32/44CR | | | | | | | | |
| 12 | 7,200 | 209 | 3,800 | 1,100 | 851 | 935 | 1,629 | 15.8 |
| 12 | 7,200 | 167 | 4,400 | 1,180 | 914 | 979 | 1,698 | 19.7 |
| 12 | 7,200 | 128 | 5,250 | 1,260 | 972 | 1,052 | 1,698 | 25.8 |
| 14 | 8,120 | 204 | 3,950 | 1,180 | 914 | 979 | 1,629 | 17.7 |
| 14 | 8,120 | 163 | 4,550 | 1,180 | 914 | 1,004 | 1,698 | 21.5 |
| 14 | 8,120 | 126 | 5,400 | 1,260 | 972 | 1,052 | 1,698 | 27.4 |
| 16 | 9,600 | 208 | 4,050 | 1,180 | 914 | 1,004 | 1,698 | 20.1 |
| 16 | 9,600 | 165 | 4,650 | 1,260 | 972 | 1,052 | 1,698 | 25.1 |
| 16 | 9,600 | 127 | 5,550 | 1,350 | 1,037 | 1,111 | 1,738 | 31.4 |
| 18 | 10,800 | 207 | 4,150 | 1,260 | 972 | 1,052 | 1,698 | 22.9 |
| 18 | 10,800 | 165 | 4,750 | 1,350 | 1,037 | 1,111 | 1,698 | 27.4 |
| 18 | 10,800 | 126 | 5,700 | 1,450 | 1,114 | 1,163 | 1,778 | 35.2 |
| 20 | 12,000 | 206 | 4,250 | 1,260 | 972 | 1,052 | 1,698 | 24.2 |
| 20 | 12,000 | 165 | 4,850 | 1,350 | 1,037 | 1,111 | 1,738 | 29.0 |
| 20 | 12,000 | 124 | 5,850 | 1,450 | 1,114 | 1,178 | 1,778 | 37.4 |

¹⁾ S_{min} and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube

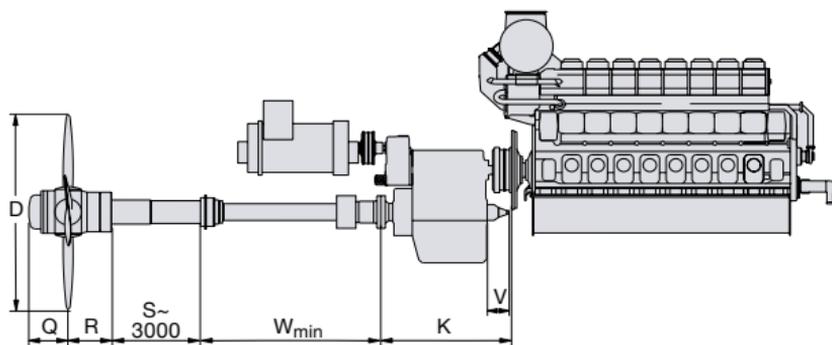

Everllence standard package examples

| Cyl. | kW | Prop. speed r/min | D mm | Hub VBS mm | Q mm | R mm | Wmin mm | Prop. mass t ¹⁾ |
|-----------------|-------|----------------------|---------|------------------|---------|---------|------------|-------------------------------|
| L32/44CR | | | | | | | | |
| 6 | 3,600 | 210 | 3,350 | 860 | 686 | 739 | 1,401 | 9.5 |
| 6 | 3,600 | 173 | 3,800 | 940 | 735 | 793 | 1,522 | 11.5 |
| 6 | 3,600 | 133 | 4,450 | 940 | 735 | 813 | 1,522 | 13.0 |
| 7 | 4,060 | 203 | 3,500 | 860 | 686 | 739 | 1,401 | 10.1 |
| 7 | 4,060 | 170 | 3,950 | 940 | 735 | 813 | 1,522 | 12.1 |
| 7 | 4,060 | 133 | 4,600 | 1,020 | 795 | 859 | 1,557 | 15.0 |
| 8 | 4,800 | 203 | 3,600 | 940 | 735 | 813 | 1,522 | 11.7 |
| 8 | 4,800 | 170 | 4,050 | 1,020 | 795 | 859 | 1,522 | 13.5 |
| 8 | 4,800 | 132 | 4,750 | 1,100 | 851 | 935 | 1,629 | 17.2 |
| 9 | 5,400 | 204 | 3,650 | 1,020 | 795 | 859 | 1,522 | 12.8 |
| 9 | 5,400 | 169 | 4,150 | 1,020 | 795 | 859 | 1,557 | 14.6 |
| 9 | 5,400 | 131 | 4,900 | 1,100 | 851 | 935 | 1,650 | 18.5 |
| 10 | 6,000 | 205 | 3,700 | 1,020 | 795 | 859 | 1,557 | 13.4 |
| 10 | 6,000 | 168 | 4,250 | 1,100 | 851 | 935 | 1,629 | 16.6 |
| 10 | 6,000 | 131 | 5,000 | 1,180 | 914 | 1,004 | 1,698 | 21.6 |

V32/40

| | | | | | | | | |
|----|-------|-----|-------|-------|------|-------|-------|------|
| 12 | 6,000 | 186 | 3,950 | 1,020 | 795 | 859 | 1,557 | 20.4 |
| 12 | 6,000 | 159 | 4,400 | 1,100 | 851 | 935 | 1,629 | 17.2 |
| 12 | 6,000 | 128 | 5,050 | 1,180 | 914 | 1,004 | 1,698 | 21.8 |
| 14 | 7,000 | 183 | 4,100 | 1,100 | 851 | 935 | 1,629 | 16.8 |
| 14 | 7,000 | 158 | 4,550 | 1,180 | 914 | 1,004 | 1,698 | 20.8 |
| 14 | 7,000 | 127 | 5,250 | 1,260 | 972 | 1,052 | 1,698 | 25.7 |
| 16 | 8,000 | 183 | 4,200 | 1,180 | 914 | 979 | 1,698 | 19.4 |
| 16 | 8,000 | 155 | 4,700 | 1,180 | 914 | 1,004 | 1,698 | 22.0 |
| 16 | 8,000 | 126 | 5,400 | 1,260 | 972 | 1,052 | 1,698 | 27.1 |
| 18 | 9,000 | 183 | 4,300 | 1,260 | 972 | 1,052 | 1,698 | 22.8 |
| 18 | 9,000 | 153 | 4,850 | 1,260 | 972 | 1,052 | 1,698 | 25.5 |
| 18 | 9,000 | 123 | 5,600 | 1,350 | 1037 | 1,111 | 1,738 | 30.7 |

¹⁾ S_{min} and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube


Everlence standard package examples

| Cyl. | kW | Prop. speed r/min | D mm | Hub VBS mm | Q mm | R mm | W _{min} mm | Prop. mass t ¹⁾ |
|---------------|-------|----------------------|---------|------------------|---------|---------|------------------------|-------------------------------|
| L32/40 | | | | | | | | |
| 6 | 3,000 | 205 | 3,300 | 790 | 639 | 704 | 1,401 | 8.3 |
| 6 | 3,000 | 171 | 3,700 | 860 | 686 | 739 | 1,401 | 9.8 |
| 6 | 3,000 | 137 | 4,200 | 940 | 735 | 813 | 1,522 | 11.8 |
| 7 | 3,500 | 199 | 3,450 | 860 | 686 | 739 | 1,401 | 9.3 |
| 7 | 3,500 | 168 | 3,850 | 940 | 735 | 793 | 1,522 | 11.6 |
| 7 | 3,500 | 134 | 4,400 | 940 | 735 | 813 | 1,522 | 12.7 |
| 8 | 4,000 | 198 | 3,550 | 860 | 686 | 739 | 1,401 | 10.2 |
| 8 | 4,000 | 165 | 4,000 | 940 | 735 | 813 | 1,522 | 12.2 |
| 8 | 4,000 | 133 | 4,550 | 1020 | 795 | 859 | 1,557 | 14.6 |
| 9 | 4,500 | 195 | 3,650 | 940 | 735 | 813 | 1,522 | 11.7 |
| 9 | 4,500 | 164 | 4,100 | 940 | 735 | 813 | 1,522 | 12.8 |
| 9 | 4,500 | 134 | 4,650 | 1020 | 795 | 859 | 1,629 | 15.9 |

V28/33D STC

| | | | | | | | | |
|----|--------|-----|-------|-------|-----|-------|-------|------|
| 12 | 6,000 | 187 | 3,700 | 1,020 | 795 | 859 | 1,557 | 16.7 |
| 12 | 6,000 | 138 | 4,000 | 1,100 | 851 | 935 | 1,698 | 22.3 |
| 12 | 6,000 | 125 | 4,300 | 1,100 | 851 | 960 | 1,698 | 23.6 |
| 16 | 8,000 | 210 | 3,700 | 1,100 | 851 | 935 | 1,629 | 19.5 |
| 16 | 8,000 | 184 | 4,000 | 1,180 | 914 | 979 | 1,698 | 23.6 |
| 16 | 8,000 | 160 | 4,300 | 1,180 | 914 | 1,004 | 1,698 | 25.1 |
| 20 | 10,000 | 228 | 3,700 | 1,180 | 914 | 979 | 1,698 | 23.4 |
| 20 | 10,000 | 200 | 4,000 | 1,260 | 972 | 1,052 | 1,698 | 26.8 |
| 20 | 10,000 | 176 | 4,300 | 1,260 | 972 | 1,052 | 1,698 | 28.2 |


¹⁾ S_{min} and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube

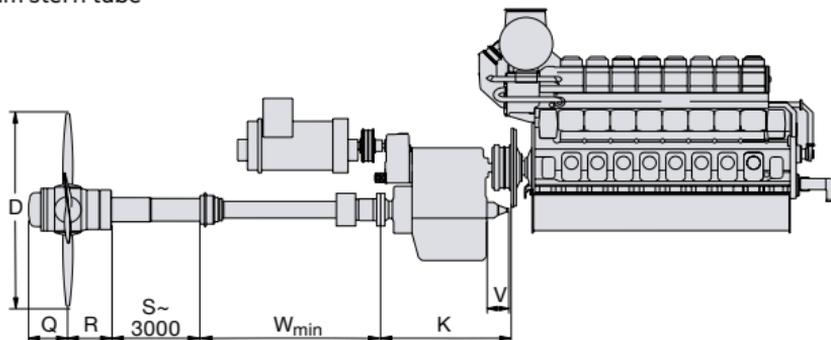

Everllence standard package examples

| Cyl. | kW | Prop. speed r/min | D mm | Hub VBS mm | Q mm | R mm | W _{min} mm | Prop. mass t ¹⁾ |
|--------------------|-------|----------------------|---------|------------------|---------|--------------------------------------|------------------------|-------------------------------|
| L27/38 Mk 2 | | | | | | | | |
| 6 | 2,460 | 264 | 2,650 | 720 | 597 | 669 | 1,331 | 6.0 |
| 6 | 2,460 | 230 | 2,950 | 720 | 597 | 669 | 1,331 | 6.3 |
| 6 | 2,460 | 203 | 3,200 | 790 | 639 | 704 | 1,331 | 7.1 |
| 6 | 2,460 | 175 | 3,500 | 790 | 639 | 704 | 1,401 | 7.7 |
| 6 | 2,460 | 163 | 3,650 | 790 | 639 | 704 | 1,401 | 7.9 |
| 7 | 2,870 | 258 | 2,800 | 790 | 639 | 704 | 1,331 | 6.7 |
| 7 | 2,870 | 222 | 3,100 | 790 | 639 | 704 | 1,331 | 7.1 |
| 7 | 2,870 | 197 | 3,350 | 790 | 639 | 704 | 1,401 | 7.7 |
| 7 | 2,870 | 172 | 3,650 | 860 | 686 | 739 | 1,401 | 8.7 |
| 7 | 2,870 | 161 | 3,800 | 860 | 686 | 739 | 1,401 | 8.9 |
| 8 | 3,280 | 253 | 2,900 | 790 | 639 | 704 | 1,331 | 7.0 |
| 8 | 3,280 | 219 | 3,200 | 860 | 686 | 739 </td <td>1,401</td> <td>8.2</td> | 1,401 | 8.2 |
| 8 | 3,280 | 196 | 3,450 | 860 | 686 | 739 | 1,401 | 8.6 |
| 8 | 3,280 | 183 | 3,600 | 860 | 686 | 739 | 1,401 | 8.8 |
| 8 | 3,280 | 158 | 3,950 | 940 | 735 | 813 | 1,522 | 10.5 |
| 9 | 3,690 | 255 | 2,950 | 860 | 686 | 739 | 1,401 | 7.9 |
| 9 | 3,690 | 216 | 3,300 | 860 | 686 | 739 | 1,401 | 8.5 |
| 9 | 3,690 | 194 | 3,550 | 860 | 686 | 739 | 1,401 | 8.9 |
| 9 | 3,690 | 182 | 3,700 | 940 | 735 | 813 | 1,401 | 9.9 |
| 9 | 3,690 | 157 | 4,050 | 940 | 735 | 813 | 1,522 | 10.9 |


¹⁾ S_{min} and propeller mass are based on 4,000 mm propeller shaft and 2,000 mm stern tube for 21/31, 27/38 and 6,000 mm propeller shaft and 3,000 mm stem tube for the other types

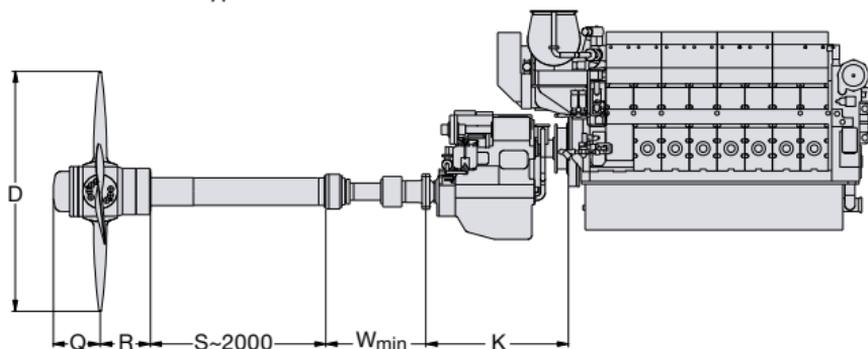

Everlence standard package examples

| Cyl. | kW | Prop. speed r/min | D mm | Hub VBS mm | Q mm | R mm | W _{min} mm | Prop. mass t ¹⁾ |
|---------------|-------|----------------------|---------|------------------|---------|---------|------------------------|-------------------------------|
| L21/31 | | | | | | | | |
| 6 | 1,290 | 272 | 2,350 | 540 | 339 | 576 | 1,316 | 3.8 |
| 6 | 1,290 | 231 | 2,600 | 600 | 456 | 603 | 1,316 | 4.0 |
| 6 | 1,290 | 203 | 2,800 | 660 | 557 | 630 | 1,316 | 4.6 |
| 6 | 1,290 | 179 | 3,000 | 660 | 557 | 630 | 1,316 | 4.7 |
| 7 | 1,505 | 258 | 2,500 | 600 | 456 | 603 | 1,316 | 4.1 |
| 7 | 1,505 | 222 | 2,750 | 660 | 557 | 630 | 1,316 | 4.7 |
| 7 | 1,505 | 196 | 2,950 | 660 | 557 | 630 | 1,316 | 4.8 |
| 7 | 1,505 | 175 | 3,150 | 660 | 557 | 630 | 1,331 | 5.2 |
| 8 | 1,720 | 261 | 2,550 | 660 | 557 | 630 | 1,316 | 4.6 |
| 8 | 1,720 | 219 | 2,850 | 660 | 557 | 630 | 1,316 | 4.9 |
| 8 | 1,720 | 195 | 3,050 | 660 | 557 | 630 | 1,331 | 5.3 |
| 8 | 1,720 | 174 | 3,250 | 720 | 597 | 669 | 1,331 | 6.0 |
| 9 | 1,935 | 262 | 2,600 | 660 | 557 | 630 | 1,316 | 4.7 |
| 9 | 1,935 | 221 | 2,900 | 660 | 557 | 630 | 1,331 | 5.2 |
| 9 | 1,935 | 198 | 3,100 | 720 | 597 | 669 | 1,331 | 6.0 |
| 9 | 1,935 | 187 | 3,200 | 720 | 597 | 669 | 1,331 | 6.1 |

¹⁾ S_{min} and propeller mass are based on 4,000 mm propeller shaft and 2,000 mm stern tube for 21/31, 27/38 and 6,000 mm propeller shaft and 3,000 mm stern tube for the other types

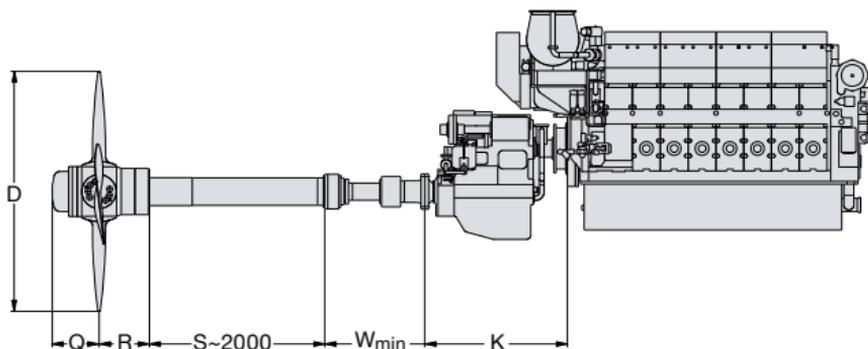

Alpha CPP solutions for 175D

| Engine | | Output | | Ship speeds [knots] | | | | | | | |
|----------------|-------|---------|--------------------------------------|---------------------|-------|-------|-------|-------|-------|-------|--|
| Type | Power | RPM | 30 | | 25 | | 20 | | 15 | | |
| | [kW] | [r/min] | Recommended propeller diameters [mm] | | | | | | | | |
| 12V175D | 1,740 | 1,800 | 1,400 | 1,500 | 1,600 | 1,700 | 1,800 | 1,950 | 2,050 | 2,200 | |
| 12V175D | 1,860 | 1,800 | 1,400 | 1,550 | 1,650 | 1,750 | 1,850 | 1,950 | 2,050 | 2,200 | |
| 12V175D | 2,040 | 1,800 | 1,450 | 1,550 | 1,700 | 1,800 | 1,850 | 1,975 | 2,100 | 2,225 | |
| 12V175D | 2,220 | 1,900 | 1,450 | 1,550 | 1,700 | 1,850 | 2,000 | 2,150 | 2,250 | 2,300 | |
| 12V175D | 2,220 | 1,800 | 1,450 | 1,600 | 1,750 | 1,850 | 1,900 | 2,000 | 2,150 | 2,250 | |
| 12V175D | 2,400 | 2,000 | 1,400 | 1,525 | 1,650 | 1,775 | 1,900 | 1,950 | 2,000 | 2,100 | |
| 16V175D | 2,720 | 1,800 | 1,525 | 1,675 | 1,800 | 1,950 | 2,050 | 2,100 | 2,200 | 2,350 | |
| 16V175D | 2,960 | 1,900 | 1,525 | 1,650 | 1,775 | 1,900 | 2,050 | 2,150 | 2,200 | 2,300 | |
| 16V175D | 2,960 | 1,800 | 1,550 | 1,700 | 1,850 | 1,975 | 2,100 | 2,175 | 2,200 | 2,350 | |
| 16V175D | 3,200 | 2,000 | 1,500 | 1,625 | 1,750 | 1,875 | 2,000 | 2,125 | 2,225 | 2,275 | |

| Reduction gear ratio | 3.0 | 3.5 | 4.0 | 4.5 | 5.0 | 5.5 | 6.0 | 6.5 |
|----------------------|-----|-----|-----|-----|-----|-----|-----|-----|
|----------------------|-----|-----|-----|-----|-----|-----|-----|-----|

Propellers for the 175D engines are optimised for a diesel-mechanical twin screw vessel operating at 85% engine rating. For engine versions and rating conditions, see the Everllence four-stroke propulsion engines chapter. The standard propeller programme is dimensioned according to Lloyd's Register No Ice.

Alpha CPP solutions for 175D

| Engine Type | Output | | Ship speeds [knots] | | | | | | | |
|-------------|------------|-------------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | Power [kW] | RPM [r/min] | Recommended propeller diameters [mm] | | | | | | | |
| | | | 30 | 25 | 20 | 15 | | | | |
| 20V175D | 3,400 | 1,800 | 1,625 | 1,750 | 1,900 | 2,025 | 2,150 | 2,275 | 2,325 | 2,400 |
| 20V175D | 3,700 | 1,900 | 1,600 | 1,750 | 1,850 | 2,000 | 2,150 | 2,250 | 2,350 | 2,425 |
| 20V175D | 3,700 | 1,800 | 1,650 | 1,775 | 1,925 | 2,050 | 2,200 | 2,325 | 2,400 | 2,450 |
| 20V175D | 4,000 | 2,000 | 1,600 | 1,700 | 1,850 | 1,975 | 2,100 | 2,200 | 2,350 | 2,450 |
| 20V175D | 4,400 | 2,000 | 1,650 | 1,800 | 1,900 | 2,000 | 2,200 | 2,250 | 2,400 | 2,500 |

Reduction gear ratio **3.0 3.5 4.0 4.5 5.0 5.5 6.0 6.5**

Propellers for the 175D engines are optimised for a diesel-mechanical twin screw vessel operating at 85% engine rating. For engine versions and rating conditions, see the Everllence four-stroke propulsion engines chapter. The standard propeller programme is dimensioned according to Lloyd's Register No Ice.

Standard shaft diameter:


Ø 175 mm

Ø 205 mm

Ø 225 mm


Ø 245 mm

Ø 265 mm

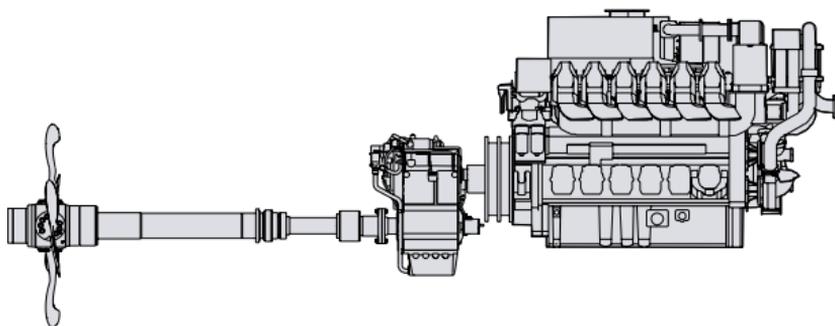

Alphatronic 3000 propulsion control system

A high number of various FPP and CPP propulsion package applications are controlled by the Alphatronic 3000 system – customised for combinations of Everllence medium and high speed engines in a wide range of diesel-mechanical, hybrid or electric propulsion setups.

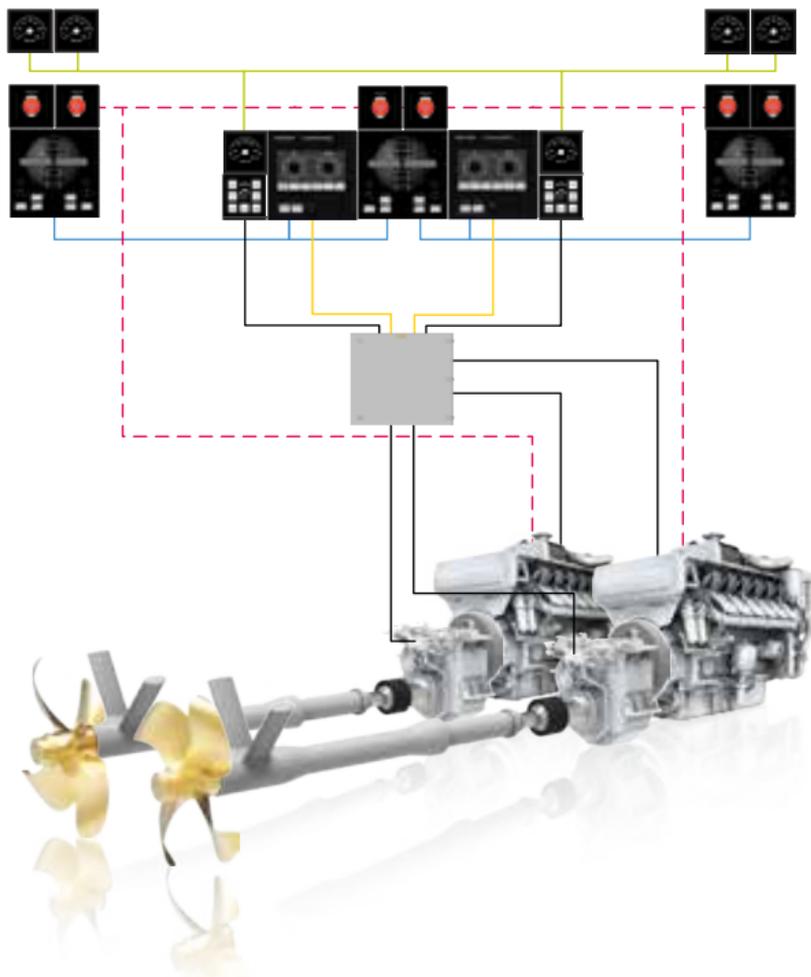

Simple system architecture for a straightforward twin 175D FPP plant

Alphatronic 3000 at your finger tips: Safe and accurate propulsion control all the way – from the navigator’s finger tips to the propeller tips. Any manoeuvring order given is translated into electrical speed setting-, pitch- or clutch signals, governing the hydraulic servo circuits of the gearbox and propeller system. Swift and reliable vessel manoeuvres are ensured due to quick and stable system response.





Everllence
turbochargers
and exhaust
gas systems



Performance meets simplicity

Find your perfect fit

Everlence has a long and successful track record in the development of exhaust gas turbochargers for low-, medium- and high-speed combustion and gas engines. Drawing on its unrivalled expertise in the design and manufacture of this crucial engine component, Everlence can offer you world-leading technology that helps you maximise the efficiency of your operations.

Everlence turbochargers are designed to deliver peak performance throughout their working lives – in some of the harshest conditions encountered anywhere in the world. This is achieved by combining three elements: simplicity, flexibility and reliability. For example, we develop and build our turbochargers to make installation, operation, servicing and maintenance as easy and efficient as possible. This reduces your initial capital investment and results in lower lifecycle costs.

Applications

- Marine propulsion
- Marine GenSets
- Power generation
- Construction
- Mining
- Off-road vehicles
- Locomotives
- Industrial
- Offshore
- Mechanical drives

TCP and TCF

Ready for the future

Ready for the future with enhanced performance and efficiency – the TCP and TCF series of radial turbochargers can achieve maximum pressure ratios of up to 7. A benchmark figure that sets new industry standards.

TCP and TCF turbochargers are from our latest generation of radial turbochargers. TCP turbochargers are suitable for high-speed and medium-speed engines, whereas the TCF type turbochargers are suitable for all speed ranges, including low-speed. Both turbocharger types are used in marine, power, locomotive and off-road applications, designed for operation on both future and conventional fuels.

TCP benefits

- Increase in power density of up to 20%
- Decrease of specific engine costs of up to 20%
- Improved efficiency levels of more than 70%
- Significantly improved dynamic behavior: 25% reduction in rotor moment of inertia
- Plug & play (keep the same flange connections as existing turbochargers)

TCF benefits

- 20% increase in specific flow
- Potential use of smaller or fewer turbochargers: cost savings
- Highest efficiencies at part load
- Significant reductions in fuel consumption and emissions
- Significantly improved dynamic behavior: 25% reduction in rotor moment of inertia
- Same standard connection dimensions as previous turbochargers
- Highest efficiencies of more than 70% at part load


Technical data

| | |
|-------------------------------------|-----------|
| Turbine type | Radial |
| Max. permissible temperature | 650/750°C |
| Pressure ratio | up to 6.7 |

Suitable for future fuels (hydrogen, ammonia and methanol) as well as conventional fuels (HFO, MDO and gas)

Supercharged engine output

| Type | kW | Mass kg |
|-------|-------|---------|
| TCP12 | 800 | 80 |
| TCP14 | 1,150 | 120 |
| TCP16 | 1,600 | 190 |
| TCP18 | 2,200 | 320 |
| TCP19 | 3,000 | 520 |
| TCP20 | 4,200 | 840 |
| TCP22 | 5,800 | 1,300 |

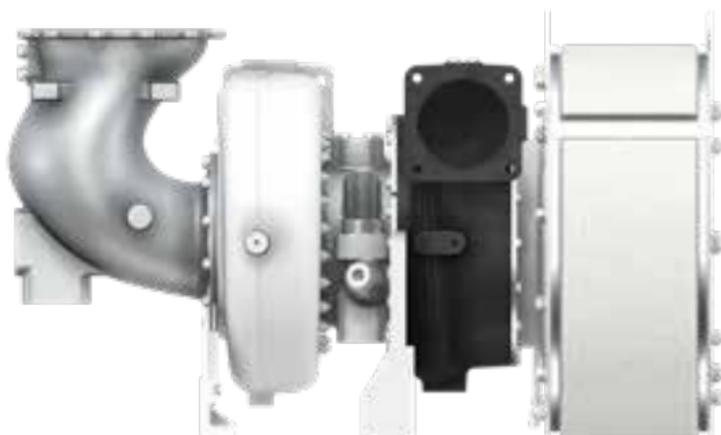

Technical data

| | |
|-------------------------------------|-----------|
| Turbine type | Radial |
| Max. permissible temperature | 650/750°C |
| Pressure ratio | up to 5.4 |

Suitable for future fuels (hydrogen, ammonia and methanol) as well as conventional fuels (HFO, MDO and gas)

Supercharged engine output

| Type | kW | Mass kg |
|--------------|-------|---------|
| TCF12 | 1,000 | 70 |
| TCF14 | 1,450 | 120 |
| TCF16 | 2,000 | 190 |
| TCF18 | 2,700 | 320 |
| TCF19 | 3,800 | 520 |
| TCF20 | 5,200 | 830 |
| TCF22 | 7,200 | 1,400 |



TCT

High-performance solution

The new TCT design is optimised for IMO Tier III requirements, and suitable for both conventional and dual-fuelled, two- and four- stroke engines in marine and power applications.

The latest Everllence axial turbocharger generation offers significant down-sizing to meet current market requirements. It offers a smaller, lighter design with a superior charging efficiency, and a high charging pressure compared to its predecessor and other similar turbochargers available on the market.

TCT features

- Long time between overhauls (TBOs)
- Maintenance friendly service concept
- Highest efficiency levels
- Compact and light design
- High-performance plain bearings


Technical data

| | |
|-------------------------------------|--------------------|
| Turbine type | Axial flow turbine |
| Max. permissible temperature | 520°C |
| Pressure ratio | up to 4.7 |
| Optimised for IMO Tier III | |

Supercharged engine output

| Type | kW | Mass kg |
|--------------|--------|---------|
| TCT30 | 7,500 | 1,820 |
| TCT40 | 9,460 | 2,500 |
| TCT50 | 12,000 | 3,455 |
| TCT60 | 15,120 | 4,735 |
| TCT70 | 19,040 | 6,480 |
| TCT80 | 24,030 | 8,890 |

Specific air consumption (le) 7.5 kg/kWh

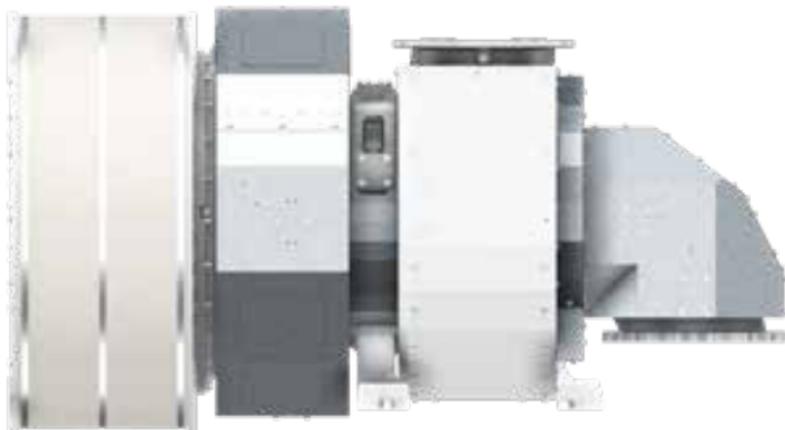

Market leader in two-stage turbocharging

Outstanding turbocharging efficiency

ECOCHARGE two-stage turbocharging is suitable for high- and medium-speed engines of all fuel types and for application in all engine power ranges. Extremely high efficiencies and pressure ratios enable increased power density and improved key engine parameters. For example, it is possible to use a smaller engine for the same required power output or to achieve lower NO_x emissions and lower specific fuel oil consumption (SFOC).

As a compact two-stage unit, the ECOCHARGE delivers outstanding turbocharging efficiency. A variety of product types and sizes are available, ensuring the perfect turbocharger-to-engine-fit. ECOCHARGE always consists of a clever combination of high- and low-pressure turbochargers.

While TCX has been specifically designed for high-pressure applications, TCA and TCR as well as our new TCT and TCF generation series round up the package as low-pressure turbochargers.

Technical data

| | |
|-------------------------------------|--------------------|
| Turbine type | Mixed flow turbine |
| Max. permissible temperature | 650°C |
| Pressure ratio (two stages) | up to 10.5 |
| Suitable for HFO, MDO, gas | |

TCX turbocharger programme

| Type | Max. engine output* | Mass |
|-------|---------------------|-------|
| | kW | kg |
| TCX17 | 8,500 | 517 |
| TCX19 | 11,900 | 870 |
| TCX21 | 16,600 | 1,564 |
| TCX23 | 23,300 | 2,394 |

* $l_e=6\text{kg/kWh}$; $p_{HPCin}=3.5\text{ bar}$, $THPCin=45^\circ\text{C}$



Technical data

| | |
|-------------------------------------|--------------------------------------|
| Turbine type | Axial flow turbine |
| Max. permissible temperature | 500°C two-stroke / 650°C four-stroke |
| Pressure ratio | up to 5.5 |
| Suitable for HFO, MDO, gas | |

Turbocharger programme

| Type | Max. supercharged engine output kW | | Mass kg |
|-------|------------------------------------|---------------------------------|------------|
| | Two-stroke *le = 7.5 kg/kWh | Four-stroke *le = 6.5 kg/kWh | |
| TCA33 | - | 5,400 | 1,370 |
| TCA44 | 7,400 | 7,900 | 1,950 |
| TCA55 | 10,200 | 10,400 | 3,200 |
| TCA66 | 14,600 | 14,800 | 5,300 |
| TCA77 | 20,700 | 21,000 | 8,330 |
| TCA88 | 32,400 | 30,000 | 14,000 |

* Specific air consumption




Technical data

| | |
|-------------------------------------|---------------------|
| Turbine type | Radial flow turbine |
| Max. permissible temperature | 650°C |
| Pressure ratio | up to 5.4 |
| Suitable for HFO, MDO, gas | |

Turbocharger programme

| Type | Max. supercharged engine output | | Mass kg |
|-------|---------------------------------|--|------------|
| | Four-stroke *le = 6.5 kg/kWh | | |
| TCR10 | 600 | | 50 |
| TCR12 | 880 | | 80 |
| TCR14 | 1,300 | | 110 |
| TCR16 | 1,850 | | 180 |
| TCR18 | 2,750 | | 300 |
| TCR20 | 4,000 | | 500 |
| TCR22 | 6,850 | | 1,050 |

* Specific air consumption

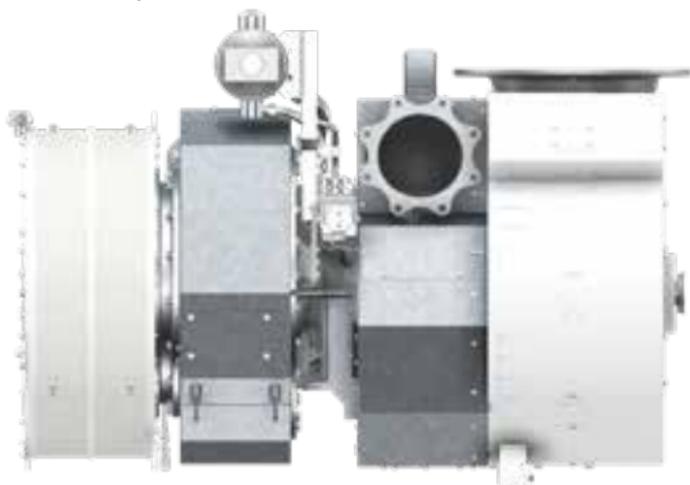

EGR blower series

Electrical Turbo Blower (ETB)

Specifically designed for EGR systems, the ETB plays an important role in enabling these systems to reach the IMO Tier III emission limitation. The EGR blower is a core component of Everlence's high-pressure EGR system that raises the exhaust gas pressure to overcome the pressure difference between exhaust gas and scavenge air receivers. In addition, the recirculated exhaust gas amount is controlled during the EGR operation by varying the blower speed.

The desired EGR operating conditions are achieved by using a high-speed electric motor, directly coupled to the compressor wheel and speed controlled by a frequency converter. The scope of supply consists of the ETB and one cabinet with frequency converter and sine wave filter.

The ETB features a high-efficient blower wheel, optimized for the low-pressure ratios necessary for the high-pressure EGR system of a two-stroke combustion engine with materials designed to withstand corrosive agents caused by the sulphur content of fuels. As such, the ETB is suitable for high-pressure EGR engines of all fuel types and in all application ranges.



Technical data

| Type | Max. blower speed | Mass of blower |
|-------------|--------------------------|-----------------------|
| | rpm | kg |
| ETB40 | 9,170 | 1,860 |

The maximum engine power output with one ETB depends on the EGR volume flow and the pressure difference between exhaust gas and scavenge air receivers. Therefore, an EGR blower selection tool will be introduced and the output will be available in CEAS soon.

For more information and blower assignment, please contact turbochargers@everllence.com.

ETB – explicitly designed for EcoEGR

ETB is explicitly designed for EcoEGR applications where the blower will run continuously in both Tier III and Tier II Eco mode. This results in a significant SFOC reduction when the engine is operated in Tier II mode.

In the SFOC-optimised Tier II Eco mode, the EGR volume flow is approx. 50% of the required volume flow in Tier III mode. To cover the operating points of both running modes, the ETB features an extremely wide compressor map.

The ETB achieves benchmark efficiencies and, therefore, minimises operational costs.


For more information about EcoEGR, see the section EcoEGR in the chapter describing Everllence B&W two-stroke propulsion engines.

SCR

Selective Catalytic Reduction (SCR) is a method to reduce nitrogen oxides (NO_x) in the exhaust gas flow of engines to meet the required Tier III limits. SCR is the most common and approved system for achieving NO_x reduction rates of up to 90%, suitable for power plants and marine applications.

Everlence has experience with both development and service of SCR systems. In 2017, the first SCR systems were introduced. There are two types of SCR layouts available:

- Low-pressure SCR-LP (after turbocharger)
- High-pressure SCR-HP (before turbocharger)

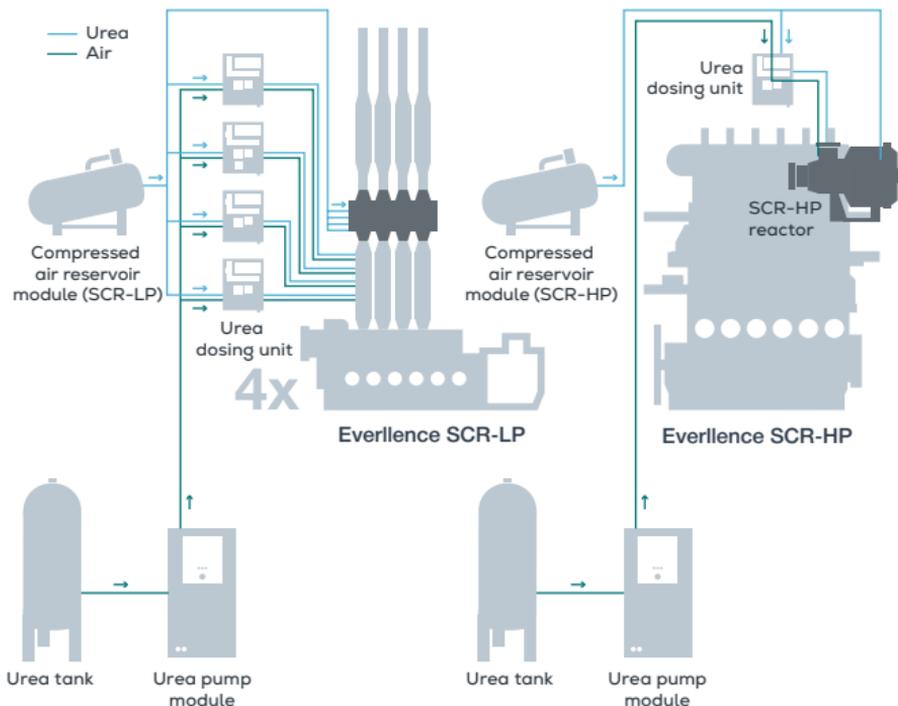

SCR-LP and HP systems

Everllence is the first manufacturer to successfully produce and offer IMO Tier III compliant four-stroke marine engines based on a fully modular SCR kit covering our entire four-stroke engine portfolio. In 2014, Everllence was awarded the first IMO Tier III EIAPP certificate together with the classification society DNV-GL.

The Everllence standard SCR system is available in fourteen different sizes covering our entire portfolio of four-stroke engines. Customised SCR systems are offered on demand.

Everllence has developed a complete range of SCR systems that work perfectly with our engines for maximum system efficiency. The intelligent exhaust gas temperature control allows significant savings in fuel consumption compared to third-party supplier systems. SCR systems work with MGO, MDO and HFO with up to 3.5% sulphur.

Our modular system comes in 14 different sizes to match all power demands. Some notable benefits of standardisation are significant cost reduction and simplification of installation.

Urea consumption

The urea consumption depends on engine type and selected performance characteristics (engine map). For an engine with ECOMAP capability it depends on operating profile, fuel type, ambient conditions, type of reduction agent, etc.

For more detailed information on the expected level of urea consumption, please contact Everllence with your project specific request.

The modular SCR component kit



SCR-HP

The SCR-HP is a small and compact NO_x emission reduction system. The most compact design in the market allows for easy integration, and the few frame sizes will cover the entire two-stroke portfolio up to 25 MW per SCR reactor.

The integrated mixing unit reduces the overall length and volume. The specific honeycombs ensure a compact design.

The SCR-HP can be mounted in all positions and is capable of running on all fuels.

Auxiliary components like the urea injection lance, urea dosing unit and urea pump module are from Everllence's well-proven SCR-LP system.





SCR-HP system

Dimensions

| Cluster | Reactor diameter | Reactor length < 0.1% sulphur | Reactor length < 3.5% sulphur |
|---------|------------------|----------------------------------|----------------------------------|
| | mm | mm | mm |
| 1 | 2,000 | 4,800 | 5,800 |
| 2 | 2,400 | 5,000 | 6,000 |
| 3 | 2,900 | 5,500 | 6,500 |
| 4 | 3,400 | 5,900 | 6,900 |
| 5 | 3,900 | 6,300 | 7,300 |
| 6 | 4,500 | 6,900 | 7,900 |



Illustration contains optional features

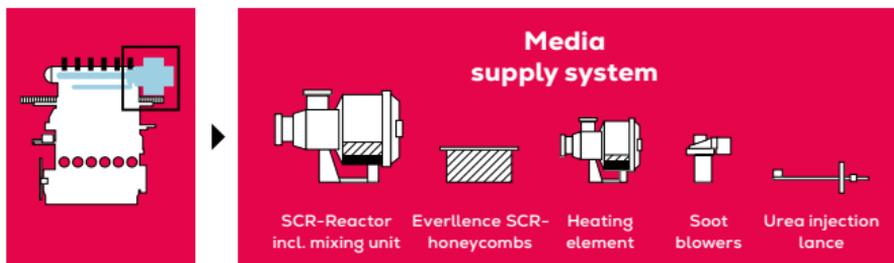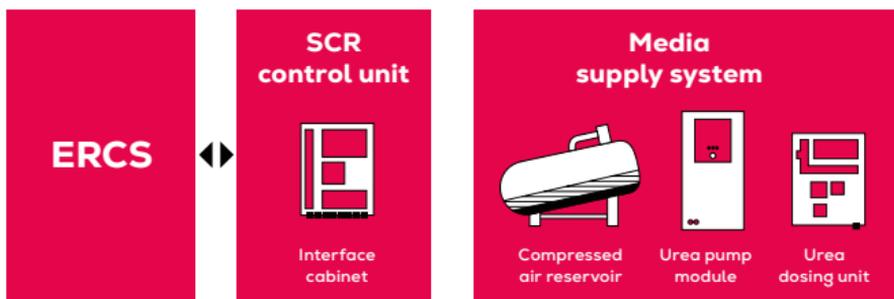

Flexible turbocharging

VTA

VTA (variable turbine area) allows charge air delivery to be precisely, steplessly and continuously optimised to the demand for charge air at all engine loads and speeds. VTA minimises fuel consumption and related exhaust emissions.

Flexible air and fuel management is key to meeting the emissions legislation of the future while increasing engine performance and reducing specific fuel oil consumption (SFOC). In heavy fuel oil applications, VTA technology has a powerful and positive role to play.

Benefits

- Reduced consumption: up to 5 g/kWh lower fuel consumption
- Reduced emissions: lower soot and smoke emission and lower particle emissions
- Easy application: suitable for TCA and TCR turbochargers and retrofit packages



Everllence

Efficient turbo- charging

ECOCHARGE



www.everllence.com





Everllence
PrimeServ





With 100+ locations worldwide, we deliver OEM expertise, fast response, and full lifecycle support – keeping your fleet moving safely, efficiently, and without interruption.

We know how critical uptime is to you and your engines. That's why we combine rapid service with deep engine knowledge to protect your uptime and performance, 24/7.own and third-party engines.

Same people, same precision, same global reach.

Wherever you sail, whatever you power, whatever you process, **we're there to provide peace of mind**

More than support. A true service partner.

- Global service network with 24/7 access
- High-quality OEM spare parts for even non-Everlence products
- Tailored service agreements to fit your operations
- Digital diagnostics and remote monitoring
- On-site, remote, and academy training for your crew
- Retrofit and upgrade solutions for compliance and fuel efficiency

From MAN to Everlence – a legacy of excellence

Everlence PrimeServ carries forward the full strength of MAN PrimeServ – delivering the expert service you've always trusted for both our own and third-party engines.

Same people, same precision, same global reach.

MFM for lube oil

Multi Fluid Monitor is a multibrand solution

Step into a new dimension of operation & maintenance with continuous condition monitoring

It all starts with a tiny anomaly, and sooner or later, it will have consequences: performance degradation, safety hazards, or even failure and downtime.

What if you could receive an alarm to stop your engine in real time?
What if you then get the recommendation to troubleshoot in time to prevent serious damage?

How do you detect tiny anomalies between planned visits, like a bearing seizure, cylinder scuffing, slight wear of components, water presence, fuel pollution, soot pollution, etc.? Now you can. Now there's Everllence MFM for lube oil.

Everllence Multi Fluid Monitor for lube oil meets CE standards, has awarded certifications: Marine BV, ABS

- Navy: NNO6630145997886, IEC shocks standards
- Cybersecurity: BV IACS UR E27.

www.everllence/services/offerings/marine-power/digital-solutions/multi-fluid-monitor/





Everllence Omnicare

**Your one-stop service solution,
regardless of manufacturer**

For over a century, Everllence PrimeServ has been providing the best service solutions and technical support for all Everllence engines and equipment.

Now, it offers maintenance, repair, and spare parts supply for engines, turbochargers, and auxiliary equipment from non- Everllence manufacturers too under PrimeServ Omnicare. You benefit from a single point of contact for your third-party equipment, reduced complexity and cost of servicing your fleet, as well as OEM supply chain.

Everllence PrimeServ is authorized by several OEMs to ensure the highest standards of competency and workmanship for your third-party equipment.

Our PrimeServ Omnicare service scope currently covers MET turbochargers, CENTA flexible couplings, and C.C. Jensen lube oil filtration systems, bringing simplicity, cost-efficiency, and improved environmental performance to your fleet management.

Lifecycle upgrade

Everllence PrimeServ is now offering its customers the opportunity to retrofit 48/60A and 48/60B engines to state-of-the-art 51/60 types.

The upgrade enables customers to prepare older engines already in service for future, climate-neutral operations.

Upgraded engines will effectively be equivalent technically to newly built 51/60 units and, as a result, achieve significant savings in fuel consumption, CO₂ and pollutant emissions, and increase reliability.

As a further option, newly converted engines can be upgraded for operation on synthetic fuels for a low premium.



L51/60R

Retrofit Variant for 48/60A and 48/60B*

Tier II

Bore: 510 mm, **Stroke:** 600 mm

| Speed | r/min | 514 | 500 |
|--------------|--------------|------------|------------|
| mep | bar | 20.0 | 20.6 |
| | | kW | kW |
| 6L51/60R | | 6,300 | 6,300 |
| 7L51/60R | | 7,350 | 7,350 |
| 8L51/60R | | 8,400 | 8,400 |
| 9L51/60R | | 9,450 | 9,450 |

Specific fuel oil consumption (SFOC) at ISO conditions


| MCR | 100% | 85% |
|-----------------------------------|-------------|-------------|
| SFOC for retrofit based on 48/60A | 180.0 g/kWh | 172.5 g/kWh |
| SFOC for retrofit based on 48/60B | 175.5 g/kWh | 173.5 g/kWh |

Specific lube oil consumption¹: 0.38 g/kWh for nominal output 1,050 kW/cyl.¹ Related to 100% actual engine load**Dimensions**

| Cyl. No. | | 6 | 7 | 8 | 9 |
|-----------------|----|----------|----------|----------|----------|
| L | mm | 8,494 | 9,314 | 10,134 | 11,160 |
| L ₁ | mm | 7,455 | 8,275 | 9,095 | 9,915 |
| W | mm | 3,165 | 3,165 | 3,165 | 3,283 |
| Dry mass | t | 110 | 124 | 137 | 155 |

Minimum centreline distance for twin engine installation: 3,200 mm

* Suitability of base engine has to be clarified during project specification

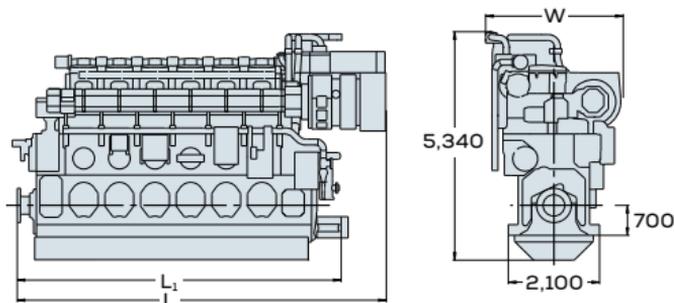

Dual-fuel conversion

A dual-fuel conversion is one of the most effective ways to drive greater efficiency and profitability from your fleet. In this process, we convert your existing diesel engine to a dual-fuel gas engine. This enables you to switch between diesel and gas as necessary, to both reduce operational costs and take advantage of optimal fuel prices as they arise.

Using alternative fuels, such as SNG, LNG, ethane, LPG, or methanol, greatly reduces SO_x, NO_x, CO₂, and particulate matter, enabling you to comply with global environmental regulations, secure worldwide port access, and meet your own sustainability targets.

Our dual-fuel retrofit solutions are not limited to the main engine, and customized projects can be provided as a turnkey solution or include gas systems in partnership with Cryo. To ensure the process is executed seamlessly from start to finish, Everllence PrimeServ covers everything from research and site survey to engineering and project management, and finally to hardware commissioning.





Everllence PrimeServ Academies

Professional certification

Everllence PrimeServ Academies offer courses covering the entire portfolio of Everllence products, both two- and four-stroke engines, power generation, and turbochargers. In the academies, participants are guided through theoretical lectures, and hands-on exercises covering the operation, maintenance, and troubleshooting, of the Everllence product portfolio. We strive to create a “real life” atmosphere such that participants can relate learning objectives to their daily working environment. That includes working on original engines, fully functioning diesel GenSets, and simulators.

In addition to our on-site courses, we now offer new digital training methods and solutions. From self-paced eLearning courses to instructor-led online courses and blended learning courses, you get maximum flexibility in choosing a course format that perfectly fits your needs.

Please find out more about the Everllence PrimeServ Academies:
www.everllence.com › [Services](#) › [Everllence PrimeServ Academy](#) › [Training](#).



PrimeServ Assist

Secured availability – optimized efficiency

Be one step ahead by using Everlence PrimeServ Assist. A proactive service solution from Everlence.

Get an instant, accurate snapshot of your machinery's status with all relevant data consolidated on one interface. PrimeServ Assist makes sure your operators are always on top of efficiency data. The result: accelerated decision-making as well as improved efficiency and cost-effectiveness. For an even better fleet oversight, PrimeServ Assist provides precise and far-reaching efficiency insights about how the individual units perform. All digital and absolutely accurate, PrimeServ Assist offers the ideal groundwork for informed decisions and the right adjustments.

Get advice on how to keep your machinery operating at peak efficiency for longer. Our experts are here for you 24/7, continuously monitoring and analyzing live data from machinery in the field, diagnosing anomalies and notifying you with valuable operational and maintenance advice.

To provide you with comprehensive insights, a monthly summary is automatically generated and available on Everlence CEON.

The earlier you spot a deviation, the sooner you can act. That's the philosophy behind PrimeServ Assist. And it's made possible by Everlence CEON.

The digital backbone of PrimeServ Assist

Everlence CEON is at the core of our digital ecosystem. This cloud-based platform connects all Everlence machinery to a powerful analytics infrastructure. It monitors thousands of installations in real time, delivering insights that drive smarter, faster decisions across fleets. Seamlessly integrated with all our digital solutions, CEON enables predictive service, peak efficiency, and real progress toward decarbonization.



Everllence Data+

Data solutions for the shipping industry

A fleet of marine engines generates an overwhelming amount of data. Everllence Data+ enables you to find the value in this sea of data - helping you to manage your ships and cargo more efficiently, ensuring vessel availability, and reducing emissions and costs. Thanks to our deep domain knowledge of the engines, we can ensure your equipment data is available, scalable and most importantly, actionable.

Based on Everllence CEON, the cloud-based platform behind our digital portfolio, Everllence Data+ securely and intelligently collects and integrates engine data in a consumable and comprehensive way. It is available for both new builds and as a retrofit on Everllence two-stroke engines.



Everllence Asset+

Secured availability – optimised efficiency

Everllence Asset+ is a range of solutions that gives you the opportunity to add functionalities to your vessels' engine systems. In other words, it makes your equipment better at performing specific tasks. Everllence Asset+ solutions raise ship performance, keep your equipment up to date, and help you comply with environmental regulations, advancing your operations on the road to energy transition and decarbonization.

Everllence Asset+ provides the possibility to select the functionality or service needed for a specific engine and, hence, adds value to the particular vessel and its purpose/task. In addition, Everllence Asset+ will offer connectivity and regular security and software updates, thus offering an engine that can be maintained as state-of-the-art across the entire life cycle.



PrimeServ LTSA

Enjoy the confidence of expert support

Long Term Service Agreements

Everlence PrimeServ Long Term Service Agreements (LTSA) provide your fleet with financial and operational security - and bring you peace of mind, knowing we'll always be there when you need us. We tailor our services to fit your strategy and customize our maintenance plans to meet your long-term goals. You benefit from access to a single point of contact for efficient communication, fast support, and continuous engine optimization via online monitoring.

Whether the need is as simple as the prompt supply of genuine parts, or as comprehensive as complete maintenance management for a vessel or fleet, the LTSA has an array of customizable solutions to meet every customer or application requirement. Our flat-fee arrangements and tailored solutions help you plan costs. Efficient supply chain planning ensures timely availability of spare parts while our global PrimeServ presence means you can depend on reliable support anywhere in the world.

Experience smooth and efficient operations with our comprehensive LTSA solutions.

Reach out to us and find out more:

www.everlence.com/services/offerings/marine-power/service-agreements



Contacts



Headquarters

Germany

Four-stroke propulsion engines and systems, GenSets, turbochargers and exhaust gas systems

Everllence SE

Stadtbachstrasse 1
86153 Augsburg
Tel.: +49 821 322 0
info-aug@everllence.com

Denmark

Two-stroke propulsion engines and systems, GenSets

Everllence SE

Everllence B&W
Tegholmegade 41
2450 Copenhagen SV
Tel.: +45 3385 1100
info-cph@everllence.com

Czech Republic

Turbochargers and exhaust gas systems

PBS Turbo s.r.o.

Velká Bíteš
Vlkovská 279
595 01 Velká Bíteš
Tel.: +420 566 822 201
pbst_sales@pbsvb.cz

Germany

Gas-, steam turbines, compressors

Everllence SE

Steinbrinkstraße 1
46145 Oberhausen
Tel.: +49 208 692 1
turbomachinery@everllence.com

Denmark

Propellers, aft ship and propulsion control systems

Everllence SE

Alpha & Alphantronic
Niels Juels Vej 15
9900 Frederikshavn
Tel.: +45 9620 4100
info-frh@everllence.com

France

Four-stroke propulsion engines, GenSets

Everllence France S.A.S.

S.E.M.T. Pielstick
8 Avenue Antoine Bourdelle,
BP427
44615 Saint-Nazaire Cedex
Tel.: +33 2 40 90 65 00
info-fr@everllence.com

Headquarters

United Kingdom

Four-stroke propulsion engines

Everllence UK Ltd.

Original Brands of: **Mirrless
Blackstone; Ruston and Paxman**

1 Mirrless Drive

Hazel Grove

Stockport

Cheshire SK7 5BP

Tel.: +44 161 483 1000

primeserv-uk@everllence.com

Switzerland

Axial-, centrifugal compressors,
complete compressor packages

Everllence Schweiz AG

Hardstraße 319

8005 Zürich

Tel. +41 44 278 20 71

info-zur@everllence.com

International group companies

Argentina

Everllence Argentina S.A.

Armenia 3575
CP B1605BOH - Munro
Prov. Buenos Aires
Tel.: +54 11 5236 6006/07
guillermo.lemo@everllence.com

Australia

Everllence Australia Pty. Ltd.

Building 2,
202 Fairfield Road
Yennora NSW 2161
Sydney
Tel.: +61 2 8874 0700
jeffrey.moloney@everllence.com

Bangladesh

MAN ES Bangladesh Ltd.

Crystal Palace, 9th Floor
SE (D) 22, Road 140
Gulshan South Avenue, Gulshan-1
Dhaka-1212
Tel.: +92 42 3533 0091 3148
tariq.anwar@everllence.com

Belgium

Everllence N.V.

Noorderlaan 181
2030 Antwerpen
Tel.: +32 3 543 8500
dirk.willems@everllence.com

Brazil

Everllence Brazil E&S Ltda.

Rua Carlos Gomes, 23 - bloco 1,
Barreto, Niterói - RJ
CEP 24.110-075
Tel.: +55 21 3506 2151
jens.hueren@everllence.com

Bulgaria

Everllence Bulgaria EOOD

7 Al. Dyakovich, Floor 5, Office 1
9000 Varna
Tel.: +359 52 33 59 60
valentin.yankov@everllence.com

Canada

Everllence Canada Ltd.

Unit 180 - 13111 Vanier Place
Richmond BC V6V 2J1
Tel.: +1 604 235 9378
kamen.stoykov@everllence.com

Chile

Everllence Chile Limitada

Parcela 291
- sector Placilla de Peñuelas
Ruta 68 - Km. 98
Valparaiso
Tel.: +56 9 4004 9600
gabriel.guevara@everllence.com

China

Everllence China Co., Ltd.

Floor 8, Xinxu Building 1
No. 3576 Zaho Lou Road
Pujiang Town, Minhang District
Shanghai 201112
Tel.: +86 21 3891 9600
pan.ke@everllence.com

International group companies

Colombia

Everllence Chile Limitada

Branch Office Columbia
Av. Cra. 7 No. 127-48,
Oficina 1009
Centro Empresarial 128
Bogotá D.C.
Tel.: +57 312 432 5521
juan.salguero@everllence.com

Cyprus

Everllence PrimeServ Cyprus

MARSOT Building, First Floor
Petrou Tsirou 4
3021 Katholiki, Limassol
Tel.: +357 25 746 082
kypros.zachariou@everllence.com

Egypt

Everllence Egypt LLC

Office G19 Katameya Heights
Business Center
Katameya New Cairo
11771 Cairo
Tel.: +20 2 20200 462
amr.tahoun@everllence.com

Ecuador

Everllence Chile Limitada

Branch Office Ecuador
Edificio Ambar,
Piso 10 Oficina 1002
Av. Portugal E10-77 y
República del Salvador
Quito
Tel.: +593 2333 1344
gabriel.guevara@everllence.com

Finland

Everllence Sverige AB

Branch Office Finland
Eteläranta 10
00130, Helsinki
Tel. +358 40775 9016
joska.taipale@everllence.com

France

Everllence France S.A.S.

8 Avenue Antoine Bourdelle,
BP427
44615 Saint-Nazaire Cedex
Tel.: +33 24090 6599
yann.tanguy@everllence.com

Germany

Everllence SE

Representative Office
Rossweg 6
20457 Hamburg
Tel.: +49 40 7409 360
colin.peesel@everllence.com

Greece

Everllence Hellas E.P.E.

Akti Miaouli 89
185 38 Piraeus
Tel.: +30 210 45 87 900
dionissis.christodouloupoulos@
everllence.com

International group companies

Hong Kong

Everllence Hong Kong Ltd.

Units 4607-15, Level 46, Tower 1
Metroplaza, 223 Hing Fong Road
Kwai Fong, New Territories
Hong Kong
Tel.: +852 6624 8038
sarath.prasannan@everllence.
com

India

Everllence India Pvt. Ltd.

E-73, MIDC Waluj 431 136
Aurangabad - 431136
Maharashtra
Tel.: +91 240 2566 700
raveesh.m-k@everllence.com

India

Everllence India Pvt. Ltd.

Branch Office Mumbai
402, Bldg No 2, Star Hub
Sahar Road, Andheri (East)
Mumbai - 400 099
Tel.: +91 22 6687 5427
pushpendra.kumar-singh@ever-
llence.com

Indonesia

PT Everllence

Nusantara Indonesia

Indonesia

Unit #17-01, 17th Floor Menara
Palma
Jl. H.R. Rasuna Said,
Block X2 Kav. 6
12950 Jakarta
Tel.: +62 21 5795 7490
jesper.gram@everllence.com

Italy

Everllence Italia s.r.l.

Via Ponte Caracciolo, 1
16126 Genova
Tel.: +39 010 209 1637
pierpaolo.da-fieno@everllence.
com

Japan

Everllence Japan Ltd.

Yokohama Blue Avenue 13F
4-4-2 Minatomirai, Nishi-ku
Yokohama 220-0012
Tel.: +81 45 227 6250
daniel.struckmeier@everllence.
com

Malaysia

Everllence Malaysia OG Sdn. Bhd.

Suite 3.01, 3rd Floor Kenanga
International
Jalan Sultan Ismail
50250 Kuala Lumpur, Malaysia
Tel.: + 603 2162 0410
david.berclaz@everllence.com

Mexico

Everllence Mexico,

S. de R.L. de C.V.

Sierra Candela 111-116, C.P. 11000
Col. Lomas de Chapultepec
Mexico, D.F.
Tel.: +52 55 4000 6104
marcos.vazquez@everllence.com

International group companies

Netherlands

Everlence Netherlands B.V.

Schiekade 36
3125 KJ Schiedam
(Port of Rotterdam)
Tel.: +31 10 272 4500
bart.speckens@everlence.com

New Zealand

Everlence New Zealand Ltd.

Naval Dockyard PO Box 32-061
Queens Parade, Devonport
Auckland 0744
Tel.: +61 2 8874 0701
jeffrey.moloney@everlence.com

Norway

Everlence Norway AS

Haakon VII's gate 1
0161 Oslo
Tel.: +47 2201 7190
erik.dahl@everlence.com

Pakistan

Everlence Pakistan Pvt. Ltd.

16-Km Raiwind Road
Lahore-55150
Tel.: +92 42 3533 0091 3
naveed.rehman@everlence.com

Panama

Everlence Panama Inc.

Av. Las Brujas, Edificio 3870,
Local 1
Veracruz, Arraiján
Tel.: +507 6572 6146
joerg.glaus@everlence.com

Peru

Everlence Peru S.A.C.

Luis Carranza Street 2120
Lima 15081
Tel.: +51 1 6284756
+51 913 037 896
xavier.vallejos@everlence.com

Philippines

Everlence Philippines Inc.

Km. 17, West Service Road
Cervantes Compound Brgy.
Marcelo Green
South Superhighway
Paranaque City, 1700
Tel.: +63 2 776 3369/3347
sebastien.marchand@everlence.com

Poland

Everlence Poland Sp. z o.o.

ul. Lubowidzka 43
80-174 Gdansk
Tel.: +48 58 325 33 90
Mobile: +48 502 536 800
kamil.tempski@everlence.com

Portugal

Everlence Iberia S.A.

Avenida do Rio Tejo, lote 3
Parque Industrial Sapeç Bay
2910-440 Setúbal
Tel.: +351 265 799 500
moreno.miguel@everlence.com

International group companies

Qatar

Everllence Qatar

Navigation WLL

Ras Laffan Avenue

Zone T-45

Ras Laffan Industrial City (RLIC)

Doha

Tel.: +974 4031 09101

joergen.mortensen@everllence.com

Saudi Arabia

MAN Energy Solutions

Saudi Arabia LLC

Prince Mohammed Bin Abdulaziz Street, Jameel Square Building,

2nd Floor No. 211

P.O. Box 55990

21544 Jeddah

Tel.: +966 2 639 4346

abdullah.kuzkaya@everllence.com

Senegal

Everllence Senegal SARL

Derrière cité Faycal

En face de la clinique du Golf

Cambérène

Dakar

Tel.: +221 33 867 79 77

abdou.fofana@everllence.com

Singapore

Everllence Singapore Pte. Ltd.

29 Tuas Avenue 2

Singapore 639460

Tel.: +65 6349 1600

nicolas.brabeck@everllence.com

South Africa

Everllence

South Africa (Pty) Ltd.

Cnr. Cartwright & Petter Street,
C.E. 6

Vanderbijlpark, 1911

Tel.: +27 11 842 0700

chris.meyer@everllence.com

South Africa

Everllence

South Africa (Pty) Ltd.

Branch office Cape Town

Corners of Vanguard,

Ocean and Portside Roads

Port of Cape Town

8000 Paarden Eiland

Tel.: +27 21 514 3361

norman.hall@everllence.com

South Korea

Everllence Korea Ltd.

51, Beombang 2-ro, Gangseo-gu

Busan, South Korea 46727

Tel.: +82 51 635 6644

tommyr.rasmussen@everllence.com

com

Spain

Everllence España S.A.

Calle Pedro Teixeira, 8-10

Edificio Iberia Mart

28020 Madrid

Tel.: +34 914 111 413

moreno.miguel@everllence.com

International group companies

Spain

Everllence Canarias, S.L.

Muelle Reina Sofia s/n
Puerto de Las Palmas
Las Palmas de Gran Canaria
35008
Tel.: +34 928 935 959
moreno.miguel@everllence.com

Sri Lanka

Everllence Lanka (Pvt) Ltd.

No. 57/8, Sir Ernest De Silva
Mawatha
Colombo 00700
Tel.: +94 11 2678930
ruwan.dassanayake@everllence.com

Sweden

Everllence Sverige AB

Oljevägen 105
41878 Gothenburg
Tel.: +46 705 172161
johan.haegg@everllence.com

Taiwan

Everllence Taiwan Ltd.

14F-1, No. 8, Min Chuan 2nd Road
Chienchen
80661 Kohsiung
Tel.: +886 7 537 2225
adam.green@everllence.com

Türkiye

Everllence Servis ve Ticaret Ltd. Sti.

Cerkesli OSB, IMES 8. Cad. No.19
41455 Dilovasi/ Kocaeli
Tel.: +90 2165 819 900
timur.iyi@everllence.com

United Arab Emirates

Everllence Middle East LLC

Jumeira Beach Road
At Drydocks World Dubai
P.O. Box 57091
Dubai
Tel.: +971 4 345 40 45
waldemar.wiesner@everllence.com

United Kingdom

Everllence UK Ltd.

Hythe Hill
Colchester
Essex, CO1 2HW
Tel.: +44 1206 795 151
robert.plant@everllence.com

USA

Everllence USA Inc.

1758 Twinwood Parkway
Brookshire, TX 77423
Tel.: +1 346 379 3029
mahesh.joshi@everllence.com

International group companies

USA

Everllence USA Inc.

Branch Office Ft. Lauderdale
551 SW 13th Terrace,
Building 595
Pompano Beach, FL 33069
Tel.: +1 954 960 6700
michael.kontny@everllence.com

Vietnam

Everllence Singapore Pte. Ltd.

Branch Office Vietnam
Unit 9, Second Floor,
International Central
17 Ngo Quyen, Hoan Kiem
Hanoi
Tel.: +84 4 3936 9728
hoanghai.tran@everllence.com

List of licensees

Symbols used:

- T: Everllence two-stroke licensee
- F: Everllence four-stroke licensee
- P: Everllence four-stroke SEMT Pielstick licensee
- TC: Everllence turbocharger licensee
- FP: Everllence fixed pitch propeller licensee

China, The People's Republic of **CSSC Engine Co., Ltd. (T)**

Tel.: +86 532 86708080 6908

CSSC Marine Power Zhenjiang **Co Ltd. (F)**

Tel.: +86 (511) 845 11 880

cssc-cmp@cssc-cmp.cn

CSSC-MES Diesel Co., Ltd. (T)

Tel.: +86 (21) 6118 6666

market@shcmd.com.cn

Dalian Marine Diesel Co. Ltd. (T)

Tel.: +86 (411) 8441 7273

dmd@online.in.cn

Dalian Marine Propeller Co., Ltd **(FP)**

Tel.: +86 (411) 8444 2866 8103

sale@dmpp.cn

Duokai Engine (Jingjiang) Co., **Ltd. (T)**

Tel.: +86 82355888 55888

sales@dkdmwd.com

Hengli Engine (Dalian) Co., Ltd. **(T)**

Tel.: +86 411 6291 5170

hed.sales@hengli.com

Hudong Heavy Machinery Co., **Ltd. (T, P)**

Tel.: +86 (21) 51 31 00 00

+86 (21) 58 71 30 07

hhm@hhm.com.cn

Shaanxi Diesel Heavy Industry **Co., Ltd. (F, P)**

Tel.: +86 910 3831 3596

+86 (29) 3831 4626

sxd408@sxdinfo.com.cn

Yichang Marine Diesel Engine **Co., Ltd. (T)**

Tel.: +86 (717) 646 86 89

market@ymd.com.cn

Yuchai Marine Power Co. Ltd. (T)

Tel.: + 86 756 5888600

sales@ycmp.com.cn

Zhenjiang Tongzhou Propeller **Co., Ltd (FP)**

Tel.: +86 (511) 8198 2822

zhangjinlong@zjtpp.com

Czech Republic

PBS Turbo s.r.o. (TC)

Tel.: +420 (566) 822 201

List of licensees

Japan

Kanadevia Corporation (T)

Tel: +81 (3) 6404 0141
de-info@hitachizosen.co.jp

JFE Engineering Corporation (P, F)

Tel: +81 (45) 505 7914
hoshino-minoru@jfe-eng.co.jp

Kawasaki Heavy Industries Ltd. (T, F, TC)

Tel: +81 (3) 3435 2313
hashimoto_h@khi.co.jp / takano_hi@khi.co.jp

Kawasaki Sub-licensee:

The Hanshin Diesel Works Ltd. (T)

Tel: +81 (78) 332 2081
overseas-section@hanshin-dw.co.jp

Mitsui E&S Co., Ltd. (T, TC)

Tel: +81 (3) 3544 3475
meseba99@mu.mes.co.jp

Mitsui E&S DU Co., Ltd. (P)

Tel: +81 (3) 3544 3131
yukio-kurose@mes.co.jp

Mitsui Sub-Licensee:

Makita Corporation (T)

Tel: +81 (87) 821 5501
webmaster@makita-corp.com

IHI Power Systems Co., Ltd (P)

Tel: +81 3 4366 1200
webmaster1@niigata-power.com/
naofumi_murakami@niigata-power.com

Saudi Arabia

Hyundai Sub-licensee:

Saudi Engine Manufacturing Company (Makeen) (T)

Tel.: +966 13 512 2002
info@makeen-ksa.com

South Korea

Hanwha Engine Co. Ltd. (T, F)

Tel.: +82 (55) 260 6154
sangsoo1.lee@hanwha.com

HD Hyundai Heavy Industries Co., Ltd. (T, TC)

Engine & Machinery Division
Tel.: +82 (52) 202 7281
enginesales@hhi.co.kr

STX Engine Co., Ltd. (F, T)

Tel. +82 (55) 280 0566
C104CM2T11422@stxengine.co.kr
youngminkim@stxengine.co.kr

HD Hyundai Marine Engine Co., Ltd (T,TC)

Tel.: +82-55-278-9438
S400380group@hd.com

Spain

Navantia S.A. (F)

Fábrica De Motores Cartagena
Tel.: +34 (968) 128 200
navantia@navantia.es

USA

Fairbanks Morse (F, P)

Tel.: +1 (608) 364 8073
mike.clark@fmdefense.com

Everllence

This document is the product and property of Everllence and is protected by applicable copyright laws. Subject to modification in the interest of technical progress. Reproduction permitted provided source is given.
4510-0025-01ppr Mar 2026.