


V28/33D STC

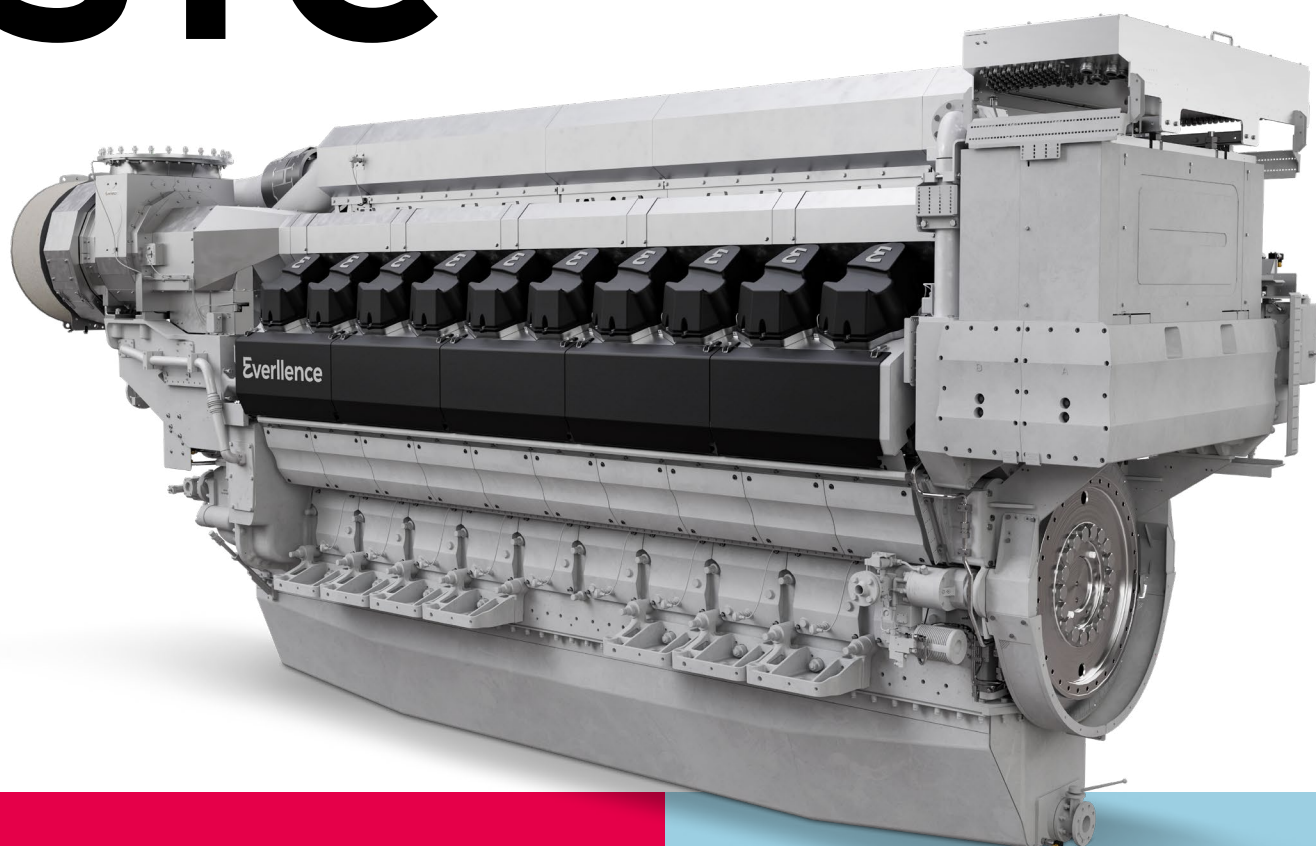

The V28/33D STC engine offers an optimum combination of high power and rapid engine response, as well as long endurance and economical, low signature operation during extended cruising and patrolling missions.

Benefits at a glance

- High reliability
- Best in class efficiency at low and high power
- Low acoustic and thermal signature characteristics
- Extended operation at low loads without white smoke or maintenance impact

V28/33D STC

Propulsion

Dimensions

Cyl. No.	12	16	20
L (mm)	6,207	7,127	8,047
H* (mm)	3,417	3,417	3,417
H** (mm)	3,682	3,682	3,682
Dry mass*** (t)	35.6	43.0	50.6

Output

		Load profile "Navy"
Speed (rpm)	1,000	1,032
mep (bar)	26.9	28.6
12V28/33D STC (kW)	5,460	6,000
16V28/33D STC (kW)	7,280	8,000
20V28/33D STC (kW)	9,100	10,000

For multi-engine arrangement only

Weight and performance parameters refer to engine with flywheel, TC silencer, attached pumps, oil filters, and lube oil cooler



* With low oil sump

** With deep oil sump

*** Tolerance: 5 %

V28/33D STC as marine main engine to be applied for multi-engine plants only in class-approved vessels

Last updated July 2026

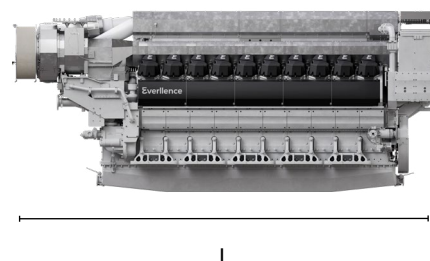

General

- Engine cycle: four-stroke
- No. of cylinders: 12, 16, 20
- Bore: 280 mm – Stroke: 330 mm
- Swept volume per cyl: 20.3 dm³

Fuel consumption at 85 % MCR

- SFOC: 183.5 g/kWh

Cylinder output

- At 1000 rpm: 455 kW (MCR)
- At 1032 rpm: 500 kW (Load profile "Navy")
- Power-to-weight ratio: 5.1 – 6.6 kg/kW

Compliance with emission regulations

- IMO Tier II
- IMO Tier III (with SCR)
- EPA Tier 2

Main features

Turbocharging system

- Sequential turbocharging system based on high efficiency TCA turbochargers for optimized full and part load operation

Engine automation and control

- Everllence in-house developed engine attached safety and control system SaCoS 5000

Fuel system

- Reliable electronic fuel injection system
- Attached fuel oil pump with black start capability

Lube oil system

- Attached lube oil pump, lube oil cooler and lube oil automatic filter

Cooling system

- 2-string high and low temperature cooling water systems with attached fresh and seawater pumps

Starting system

- Pressurized air starter (turbine type)

Engine mounting

- Resilient or shock mounting

Inclination

- Designed for up to max. 45° rolling

Engine design

- No power reduction required up to:
Air temp. 45 °C,
Seawater temp. 32 °C
Continuous low load operation down to 5 % MCR

Applications

- CPP and FPP/waterjet

Optional equipment

- Additional and full power take-off at engine free end available

MCR = Maximum continuous rating/max. 455 kW cylinder output

SCR = Selective catalytic reduction

SFOC = Specific fuel oil consumption

Everllence

86224 Augsburg, Germany

P + 49 821 322-0

F + 49 821 322-3382

info@everllence.com

www.everllence.com

All data provided in this document is non-binding. This data serves informational purposes only and is not guaranteed in any way. Depending on the subsequent specific individual projects, the relevant data may be subject to changes and will be assessed and determined individually for each project. This will depend on the particular characteristics of each individual project, especially specific site and operational conditions. Copyright © Everllence. GKM-AUG EVR000032EN-R2-260700