

# Battery hybrid wellboat

Njord Aquashipping AS, Norway, has selected Everllence to provide propulsion and auxiliary power systems for its state-of-the-art battery hybrid wellboat design.

The 2,800 m<sup>3</sup> live fish carrier is a complete design solution from NSK Ship Design, Norway – developed and optimized in close cooperation with Everllence. The vessel is built by Sefine Shipyard, Turkey.


## Environment and energy efficiency



NSK Ship Design took a proactive approach to this vessel design with demands and important progress in a more sustainable direction for the aquaculture industry in general. The overall target for the designer is to reduce the vessel's carbon footprint and ensure clean and careful handling of live fish resources. The innovative new Everllence-powered battery hybrid power, propulsion, and propeller system is fundamental for this.

Rendering of the new 2,800 m<sup>3</sup> – 79.3 x 16m  
battery hybrid wellboat (image courtesy of  
NSK Ship Design)



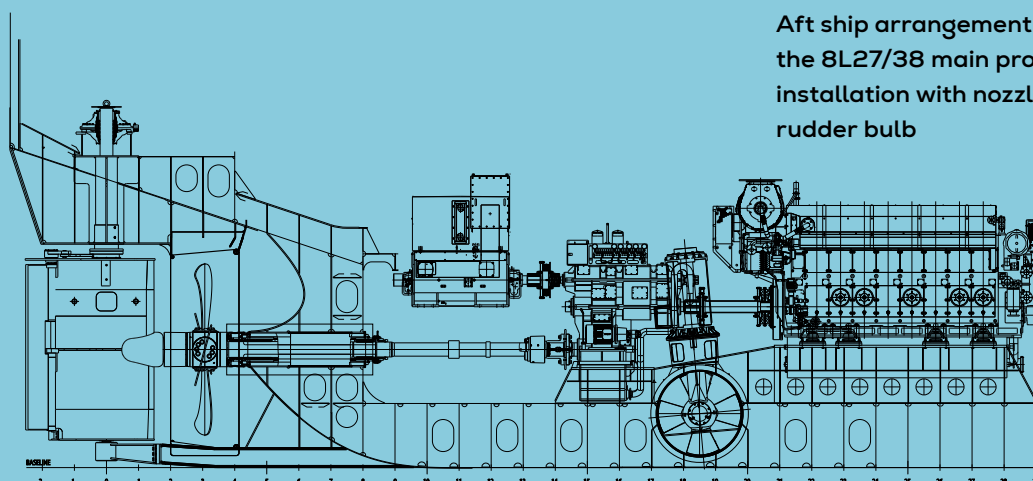

Aft ship arrangement showing the 8L27/38 main propulsion installation with nozzle and rudder bulb

### Complete Everllence solution

The following equipment has been specified for efficiently powering and propelling the wellboat:

- 8L27/38 propulsion engine delivering 2,920 kW at 800 rpm
- RENK two-speed gearbox with PTH and hybrid modes
- Alpha VBS790 CP propeller with nozzle and rudder bulb
- Alphatronic 3000 propulsion control system with Speed Pilot and adaptable combinator curves
- 12V175D GenSet, 1,800 kW
- LIAG/MAN auxiliary GenSet, 800 kW

The vessel is equipped with a 1,000 kWh battery package (2c; up to 2,000 kW), fully hybrid system integrated for use in hybrid maneuvering combinator mode, peak shaving, and PTH modes – together with a dynamic positioning system.

Main and auxiliary engines are approved for future operation with HVO (hydrotreated vegetable oil) biofuels which, together with energy recovery features and further hull, aft ship, and propulsion system measures, minimize the vessel's overall greenhouse gas emissions.

### Propeller and aft ship optimization

Due to the proficient teamwork with NSK Ship Design at an early stage, Everllence was able to exploit some optimization parameters in relation to design integration, such as the final location, angle, and fixation of the propeller nozzle in the aft ship structure. Furthermore, the hull lines in the vessel's aft ship region were slightly modified for an improved inflow pattern to the propeller.

The cooperation with NSK gave rise to a new optimized balance between the increased hull resistance, reduced suction resistance, and a better flow to the propeller, which proved to be beneficial overall with additional suppression of vibrations and noise. The calculated power reductions and corresponding fuel consumption savings were 13.4%.


### Tank testing – rudder bulb design

CFD optimization with and without rudder bulb demonstrated a noticeably better propulsion performance around the design point, and the addition of the rudder bulb further increased efficiency up to 2% at 10–11 kn free sailing, while also resulting in an improved bollard pull capacity by up to 1%. Very good results were confirmed in tank testing.

### Perfect partnership cooperation

Our close dialog and exchange of knowledge with NSK Ship Design resulted in the precise definition of needs and design criteria for the optimal propulsion and power system for the vessel's operational pattern.


CFD simulation, free sailing condition: Surface pressure and streamlines on ducted propeller and rudder bulb



# Propulsion workhorse

Core of the  
hybrid system

The robust 8L27/38 medium-speed engine specified for a TBO of 32,000 hours delivers 2,920 kW at Tier III SCR operation.

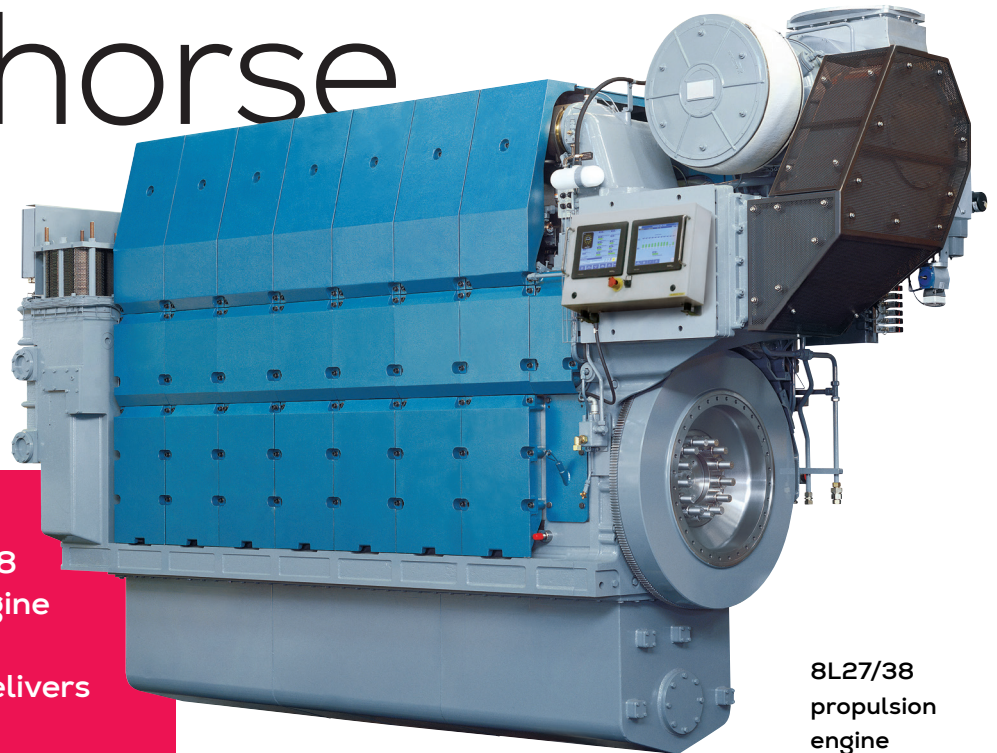

8L27/38  
propulsion  
engine

## PrimeServ ASSIST monitoring

As part of the package supplied, a PrimeServ ASSIST 'basic service solution' has been specified for activation in the warranty period. The PrimeServ ASSIST remote monitoring and optimization combines the latest digital technologies with Everllence's expertise – for maximized equipment availability, safety, and efficiency. Everllence experts connected via a global network ensure the proactive PrimeServ ASSIST services around the clock.

## Adaptive combinator curves

Performance optimization and fuel savings: The Alphasonic 3000 propulsion control system's adaptive combinator curves ensure optimal operational performance in all conditions – by continuously adapting the combination of revolutions per minute and pitch to ensure maximum efficiency and always enabling sufficient power to both propeller and shaft generator. Other factors which can influence the adaption are ship loading, draft, and hull and wave resistance.

## All in all – reductions and savings

Flexibility and high energy efficiency in all operational modes have been achieved – resulting in radical fuel savings, reduced emissions, fewer running hours on auxiliary equipment, lower consumption, and a reduced environmental footprint in general.



Alphasonic 3000 propulsion  
control with Speed Pilot

**Everllence**

Niels Juels Vej 15  
9900 Frederikshavn,  
Denmark  
P + 45 96 20 41 00  
[info-frh@everllence.com](mailto:info-frh@everllence.com)  
[www.everllence.com](http://www.everllence.com)

MAN Energy Solutions SE has been renamed to Everllence SE and its products are being rebranded from "MAN" and/or "MAN Energy Solutions" to "Everllence". As this is an ongoing process, any reference to "MAN" and/or "MAN Energy Solutions" is actually a reference to "Everllence".

All data provided in this document is non-binding. This data serves informational purposes only and is not guaranteed in any way. Depending on the subsequent specific individual projects, the relevant data may be subject to changes and will be assessed and determined individually for each project. This will depend on the particular characteristics of each individual project, especially specific site and operational conditions. (3010-0508-01)

Copyright © Everllence.  
EVR 000274EN-250600, GKM-FRH